
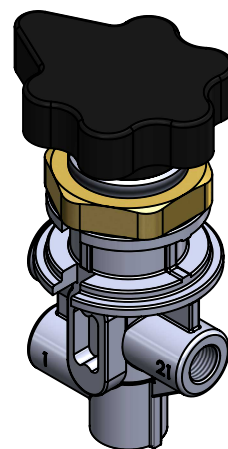
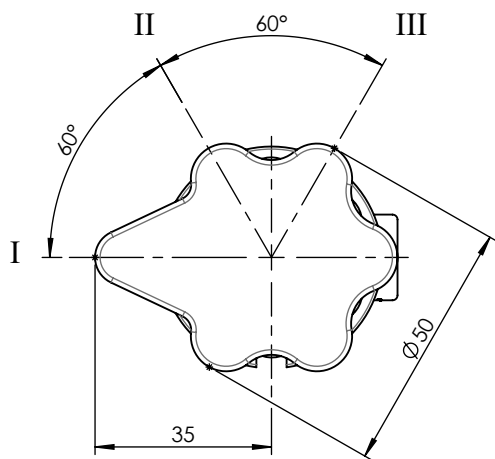
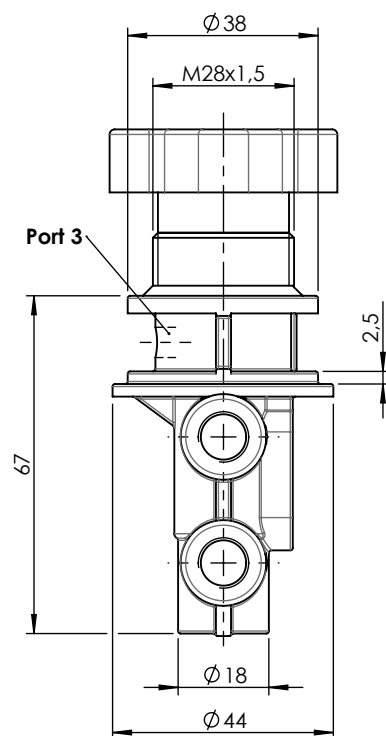
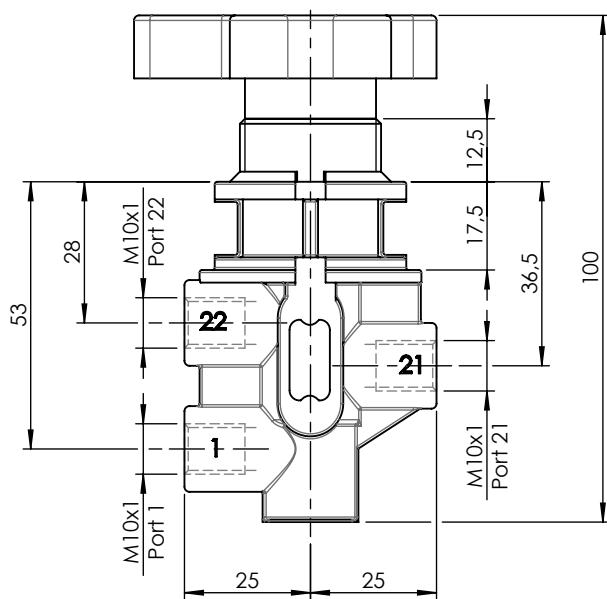


	1	2	3	4																																																									
A	Technical sheet / Datos técnicos:																																																												
B	Part number adaptable to / Referencia adaptable a		4630370040																																																										
	Operating pressure / Presión de trabajo		max. 10 bar																																																										
	Permissible medium / Medio de funcionamiento		Air / Aire																																																										
	Operating temperature range / Rango de temperatura		-25°C to / a +80°C																																																										
	Weight / Peso		250 gr																																																										
C																																																													
D	<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Supply / Alimentación</td> <td>M10x1,0</td> </tr> <tr> <td>21</td> <td>Delivery / Salida</td> <td>M10x1,0</td> </tr> <tr> <td>22</td> <td>Delivery / Salida</td> <td>M10x1,0</td> </tr> <tr> <td>3</td> <td>Exhaust / Escape</td> <td>-</td> </tr> </tbody> </table>				Port / Conexión	Function / Función	Thread / Rosca	1	Supply / Alimentación	M10x1,0	21	Delivery / Salida	M10x1,0	22	Delivery / Salida	M10x1,0	3	Exhaust / Escape	-																																										
Port / Conexión	Function / Función	Thread / Rosca																																																											
1	Supply / Alimentación	M10x1,0																																																											
21	Delivery / Salida	M10x1,0																																																											
22	Delivery / Salida	M10x1,0																																																											
3	Exhaust / Escape	-																																																											
E	Purpose / Propósito: To ventilate and to purge operating cylinders. / Ventilar y purgar los cilindros operativos.																																																												
	Installation requirements / Requisitos para la instalación: Mounting is accomplished with one nut M28. / El montaje se realiza mediante una tuerca M28.																																																												
F	<table border="1"> <tr> <td rowspan="4">Modification</td> <td>4</td> <td></td> <td></td> <td></td> <td>Drawn</td> <td rowspan="4"> </td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td>22/01/18 J.S.</td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td>Checked</td> </tr> <tr> <td>1</td> <td></td> <td></td> <td></td> <td>22/01/18 O.V.</td> </tr> <tr> <td rowspan="4">nº</td> <td>Modified</td> <td>Date</td> <td>Reason</td> <td>General Tolerance</td> <td>Assembly</td> <td>-</td> </tr> <tr> <td colspan="4">Comments</td> <td>-</td> <td>Part name</td> <td>4/3 ways valve</td> </tr> <tr> <td colspan="4"></td> <td>Material</td> <td>ID. Reference</td> <td>2215204</td> </tr> <tr> <td colspan="4"></td> <td>-</td> <td>Scale: -</td> <td rowspan="2"> </td> </tr> <tr> <td colspan="4"></td> <td></td> <td>Review: 0</td> <td>Sheet 1/2</td> </tr> </table>				Modification	4				Drawn		3				22/01/18 J.S.	2				Checked	1				22/01/18 O.V.	nº	Modified	Date	Reason	General Tolerance	Assembly	-	Comments				-	Part name	4/3 ways valve					Material	ID. Reference	2215204					-	Scale: -							Review: 0	Sheet 1/2
Modification	4					Drawn																																																							
	3					22/01/18 J.S.																																																							
	2					Checked																																																							
	1				22/01/18 O.V.																																																								
nº	Modified	Date	Reason	General Tolerance	Assembly	-																																																							
	Comments				-	Part name	4/3 ways valve																																																						
					Material	ID. Reference	2215204																																																						
					-	Scale: -																																																							
					Review: 0	Sheet 1/2																																																							
	PG/18/02 rev.1 1	2	3	4																																																									



F	Modification	4				Drawn		
		3				22/01/18 J.S.		
		2				Checked		
		1				22/01/18 O.V.		
		nº	Modified	Date	Reason	General Tolerance		
	Comments					ISO 2768 c-K	Part name	4/3 ways valve
					Material	ID. Reference	2215204	
					-	Scale: 2/3		
						Review: 0		
PG/18/02 rev.1 1			2		3		4	