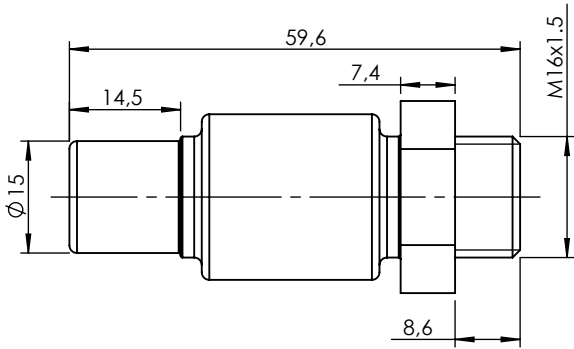


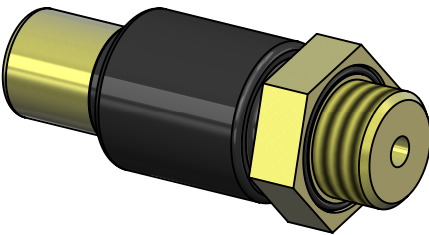



1		2		3		4	
A							
Technical sheet / Datos técnicos:							
Part number adaptable to / Referencia adaptable a				4346082260			
Opening pressure / Presión de apertura				15 +1,5 bar			
Permissible medium / Medio de funcionamiento				Air / Aire			
Operating temperature range / Rango de temperatura				-40 °C to / a +80 °C			
Weight / Peso				81 gr			
B							
							
C							
							
D							
Port / Conexión		Function / Función			Thread / Rosca		
1		Supply / Alimentación			M16x1.5		
E							
Purpose / Propósito: To limit the pressure inside a compressed air system to a maximum admissible value. / Limitar la presión dentro de un sistema de aire comprimido a un valor máximo admisible.							
Installation requirements / Requisitos para la instalación: The valve must be installed using the thread M16x1.5. / La válvula debe ser instalada utilizando la rosca M16x1.5.							
F							
Modification	4					Drawn	
	3					10/12/19 R.A.	
	2					Checked	
	1					10/12/19 O.V.	
	nº	Modified	Date	Reason	General Tolerance	Assembly	
Comments					ISO 2768 c-K	Part name	Safety valve
					Material	ID. Reference	2280113
					-	Scale: 1/1	
						Review: 0	
Sheet 1/2							
PG/18/02 rev.1 1		2		3		4	