
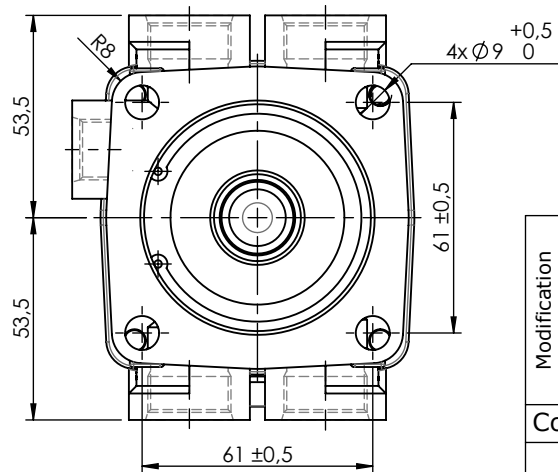
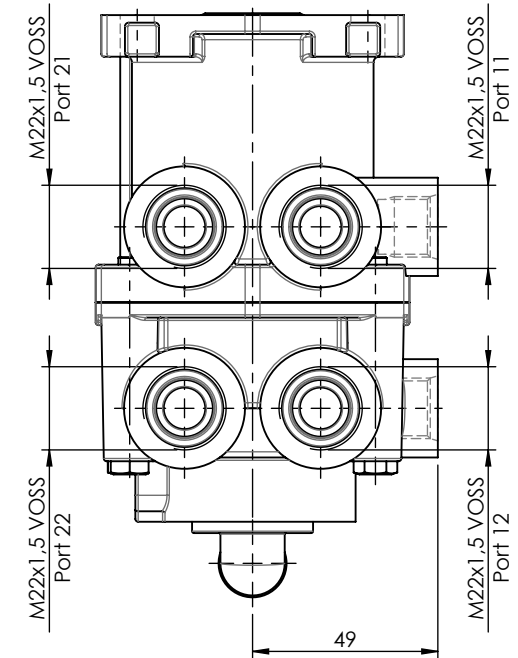
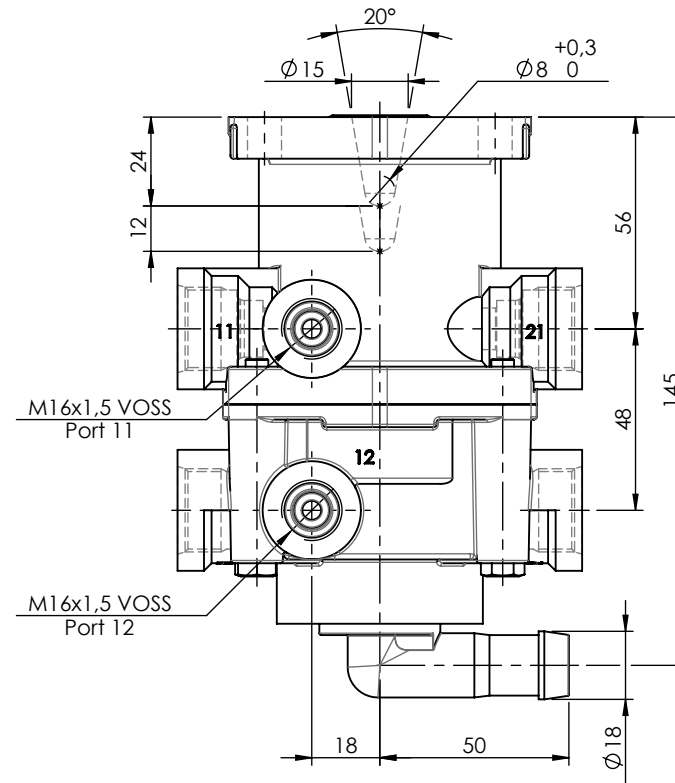
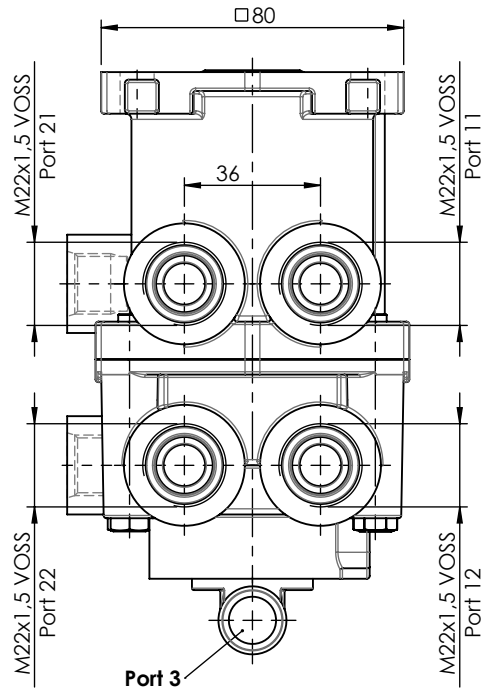



1		2		3		4																																																															
A	Technical sheet / Datos técnicos:						A																																																														
	Part number adaptable to / Referencia adaptable a					4613151700																																																															
	Operating pressure / Presión de trabajo					max. 10 bar																																																															
	Predominance / Predominancia					< 0,3 bar																																																															
	Permissible medium / Medio de funcionamiento					Air / Aire																																																															
	Operating temperature range / Rango de temperatura					-40°C to / a +80°C																																																															
B	Weight / Peso					1300 gr	B																																																														
C								C																																																													
	<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>11</td> <td>Supply / Alimentación</td> <td>2x M22x1,5 VOSS & M16x1,5 VOSS</td> </tr> <tr> <td>12</td> <td>Supply / Alimentación</td> <td>2x M22x1,5 VOSS & M16x1,5 VOSS</td> </tr> <tr> <td>21</td> <td>Delivery / Salida</td> <td>2x M22x1,5 VOSS</td> </tr> <tr> <td>22</td> <td>Delivery / Salida</td> <td>2x M22x1,5 VOSS</td> </tr> <tr> <td>3</td> <td>Exhaust / Escape</td> <td>Tube / Tubo 90°</td> </tr> </tbody> </table>							Port / Conexión	Function / Función	Thread / Rosca	11	Supply / Alimentación	2x M22x1,5 VOSS & M16x1,5 VOSS	12	Supply / Alimentación	2x M22x1,5 VOSS & M16x1,5 VOSS	21	Delivery / Salida	2x M22x1,5 VOSS	22	Delivery / Salida	2x M22x1,5 VOSS	3	Exhaust / Escape	Tube / Tubo 90°	D																																											
Port / Conexión	Function / Función	Thread / Rosca																																																																			
11	Supply / Alimentación	2x M22x1,5 VOSS & M16x1,5 VOSS																																																																			
12	Supply / Alimentación	2x M22x1,5 VOSS & M16x1,5 VOSS																																																																			
21	Delivery / Salida	2x M22x1,5 VOSS																																																																			
22	Delivery / Salida	2x M22x1,5 VOSS																																																																			
3	Exhaust / Escape	Tube / Tubo 90°																																																																			
D	Purpose / Propósito: Application of service brake system through the pedal actuation by the driver. / Aplicación del freno de servicio mediante la actuación del pedal por parte del conductor.							D																																																													
E	Installation requirements / Requisitos para la instalación: The design of the foot brake valve, acting on seat, must guarantee the maximum way of the push rod that is necessary to control the valve even in case of failure in the circuit I. Mounting is accomplished with four screws M8. / El diseño de la válvula de freno de pie, accionándolo desde el asiento, debe garantizar el máximo recorrido de la varilla de empuje que resulta necesario para el accionamiento de la válvula, incluso en caso de que falle el circuito I. El montaje se efectúa mediante cuatro tornillos M8.							E																																																													
	<table border="1"> <tr> <td rowspan="5">F</td> <td rowspan="5">Modification</td> <td>4</td> <td></td> <td></td> <td></td> <td>Drawn</td> <td rowspan="5"> </td> <td rowspan="5">F</td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td>31/01/18 J.S.</td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td>Checked</td> </tr> <tr> <td>1</td> <td></td> <td></td> <td></td> <td>31/01/18 O.V.</td> </tr> <tr> <td>nº</td> <td>Modified</td> <td>Date</td> <td>Reason</td> <td>General Tolerance</td> <td>Assembly</td> <td>-</td> </tr> <tr> <td colspan="5">Comments</td> <td>-</td> <td>Part name</td> <td>Foot brake valve</td> </tr> <tr> <td colspan="5"></td> <td>Material</td> <td>ID. Reference</td> <td>2212832</td> </tr> <tr> <td colspan="5"></td> <td>-</td> <td>Scale: -</td> <td rowspan="2"> </td> <td rowspan="2">Sheet 1/2</td> </tr> <tr> <td colspan="5"></td> <td>-</td> <td>Review: 0</td> </tr> </table>							F	Modification	4				Drawn		F	3				31/01/18 J.S.	2				Checked	1				31/01/18 O.V.	nº	Modified	Date	Reason	General Tolerance	Assembly	-	Comments					-	Part name	Foot brake valve						Material	ID. Reference	2212832						-	Scale: -		Sheet 1/2						-
F	Modification	4				Drawn				F																																																											
		3				31/01/18 J.S.																																																															
		2				Checked																																																															
		1				31/01/18 O.V.																																																															
		nº	Modified	Date	Reason	General Tolerance		Assembly	-																																																												
Comments					-	Part name	Foot brake valve																																																														
					Material	ID. Reference	2212832																																																														
					-	Scale: -		Sheet 1/2																																																													
					-	Review: 0																																																															
PG/18/02 rev.1 1		2		3		4																																																															



Modification	4				Drawn		
	3				31/01/18 J.S.		
	2				Checked		
	1				31/01/18 O.V.		
	nº	Modified	Date	Reason	General Tolerance	Assembly	-
Comments				ISO 2768 c-K	Part name	Foot brake valve	
				Material	ID. Reference	2212832	
				-	Scale: 1/2		
					Review: 0		

Sheet
2/2