

1

2

3

4

5

6

7

8

Technical sheet / Datos técnicos:

Part number adaptable to / Referencia adaptable a	9347050020
Operating pressure / Presión de trabajo	max. 13 bar
Permissible medium / Medio de funcionamiento	Air / Aire
Operating temperature range / Rango de temperatura	-40°C to / a +80°C
Weight / Peso	1700 gr

Port / Conexión	Function / Función	Thread / Rosca
1	Supply / Alimentación	M22x1,5 VOSS
21	Delivery / Salida	M22x1,5 VOSS
22	Delivery / Salida	M22x1,5 VOSS
23	Delivery / Salida	M22x1,5 VOSS
24	Delivery / Salida	M22x1,5 VOSS
25	Delivery / Salida	M22x1,5 VOSS
26	Delivery / Salida	M22x1,5 VOSS
27	Delivery / Salida	Closed / Taponada
28	Delivery / Salida	Closed / Taponada

Circuit / Circuito	1	2	3	4
Port / Conexión	21	22	23 25	24 26
Opening pressure / Presión de apertura (bar)	9,0 ⁰ _{-0,3}		7,5 ⁰ _{-0,3}	
Closing pressure dynamic / Presión de cierre dinámica (bar)	≥ 7,0		≥ 4,5	
Pressure limiting / Presión de limitación (bar)	-		8,5 ⁰ _{-0,4}	

21

27

23

25

22


28

24

26

1

</

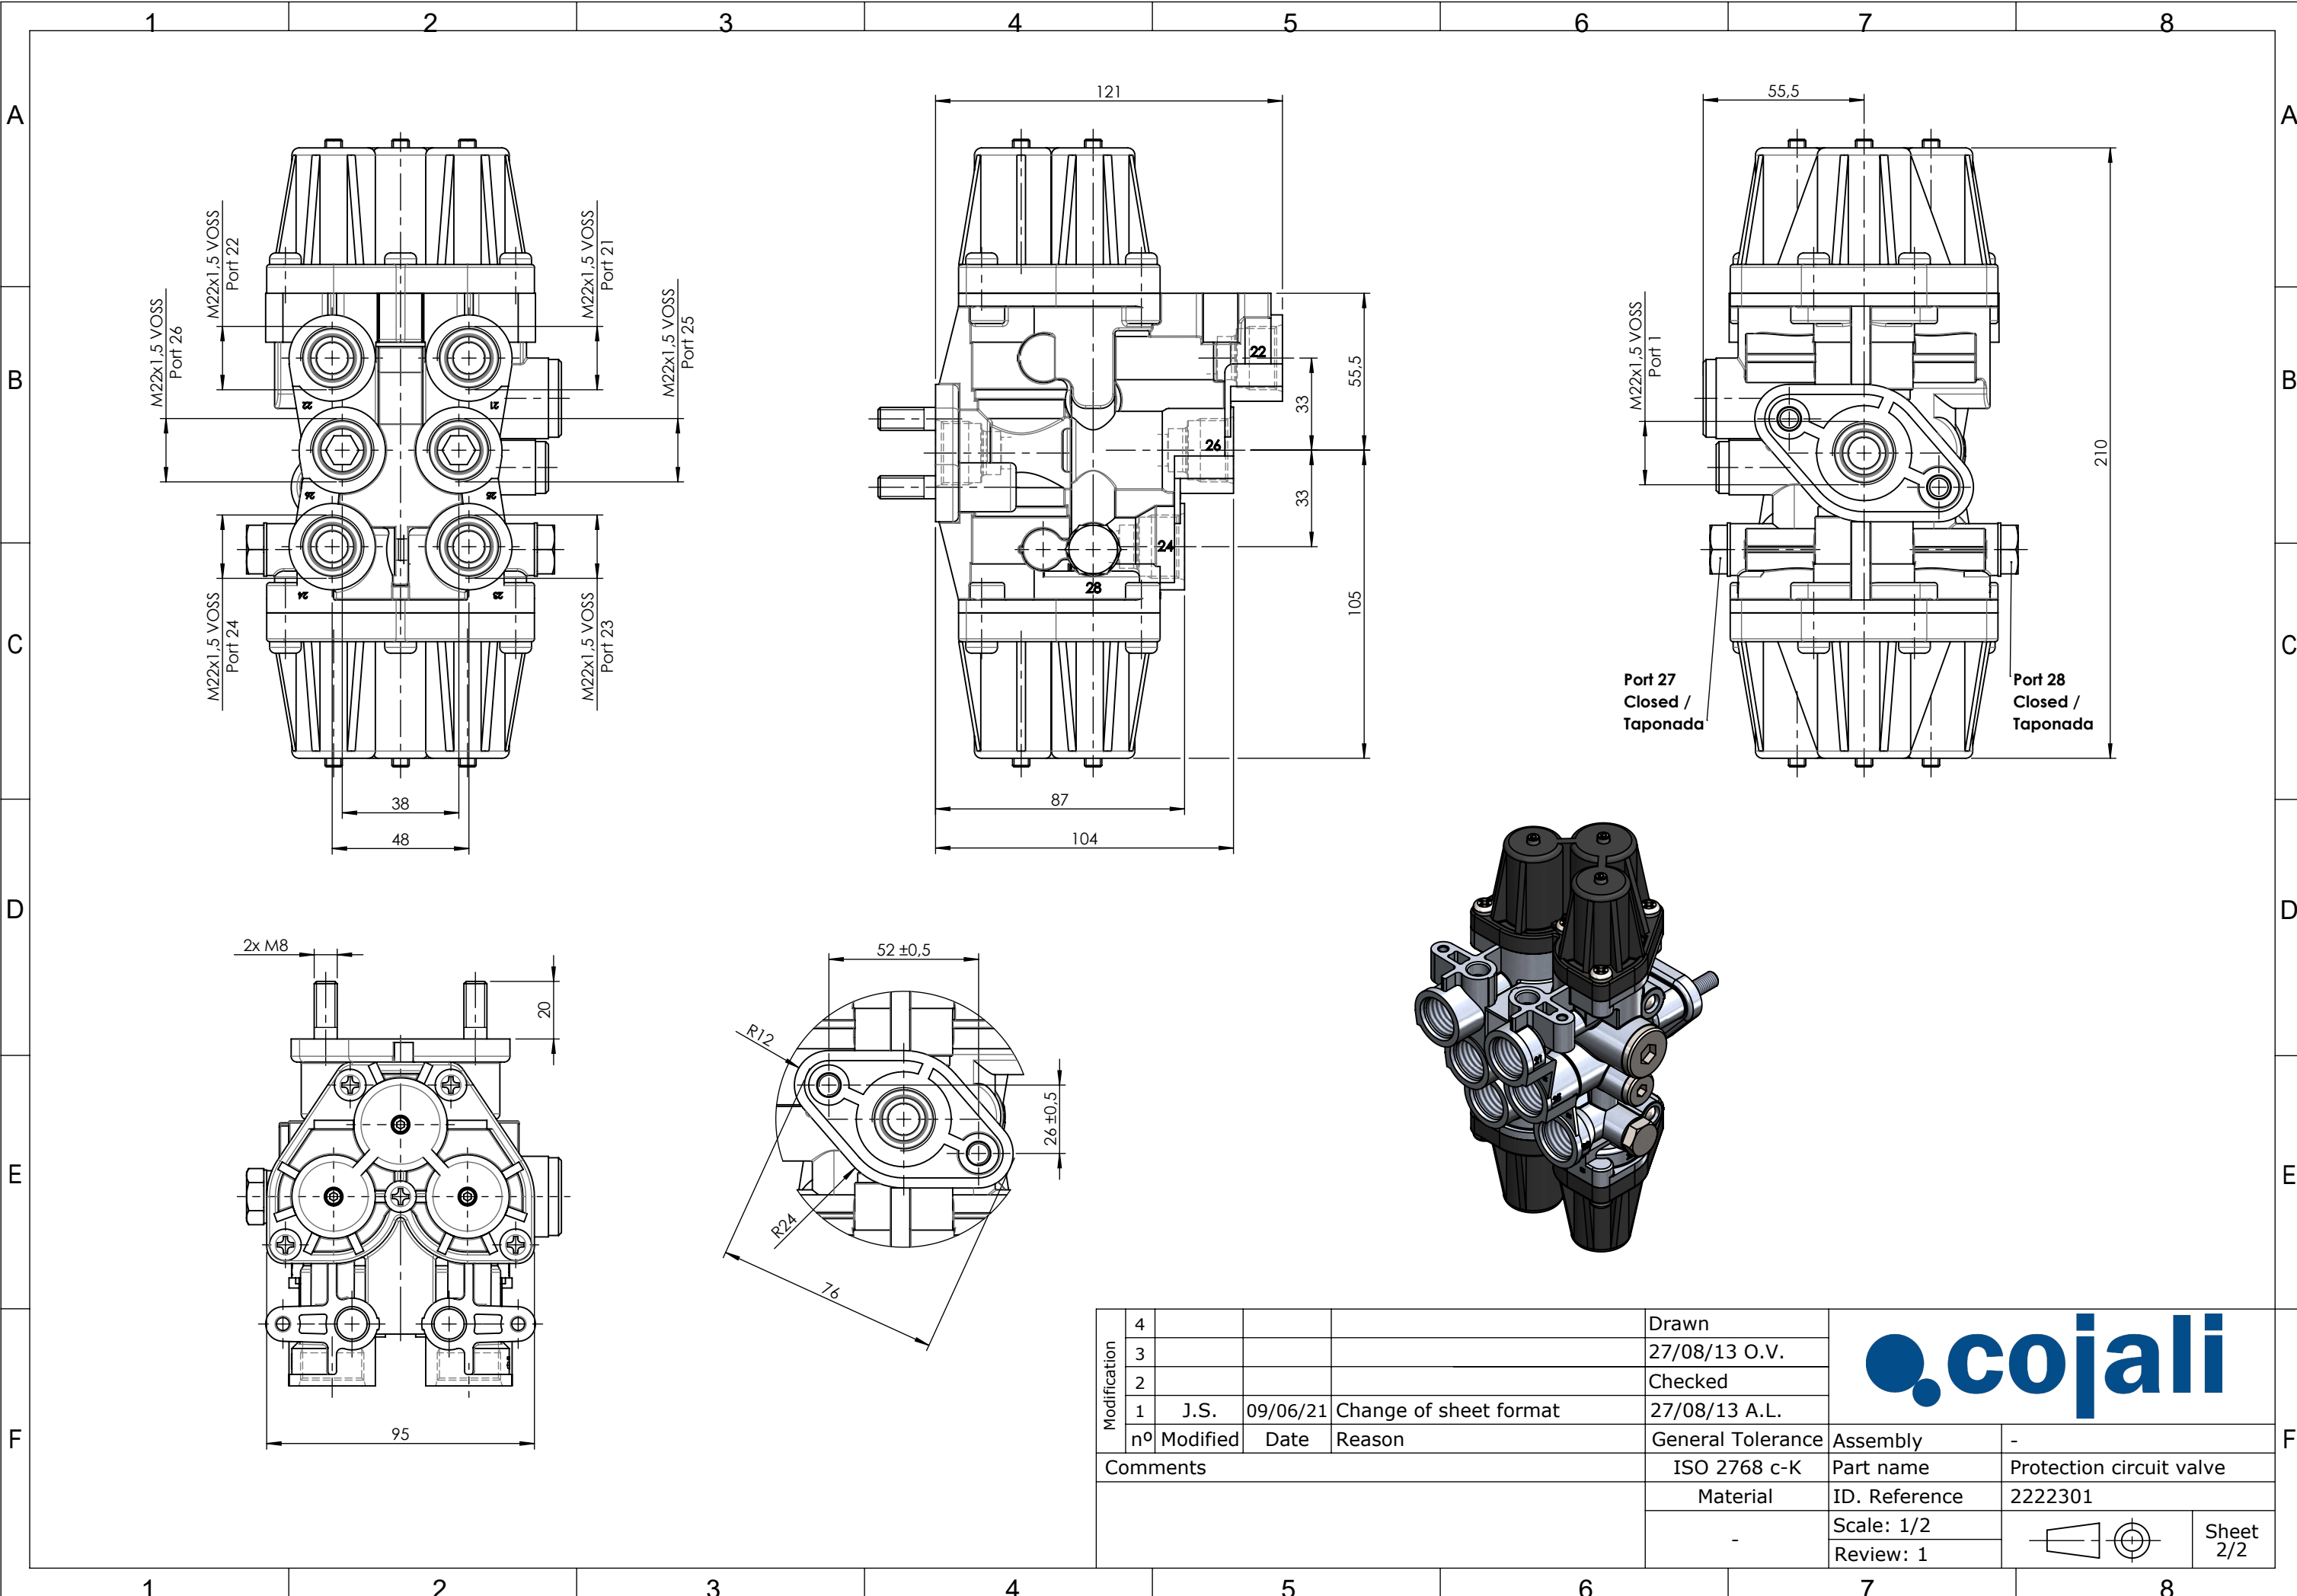

Modification	4				Drawn			
	3				27/08/13 O.V.			
	2				Checked			
	1	J.S.	09/06/21	Change of sheet format	27/08/13 A.L.			
	nº	Modified	Date	Reason	General Tolerance			
Comments					ISO 2768 c-K	Part name	Protection circuit valve	
					Material	ID. Reference	2222301	
					-	Scale: 1/2		
						Review: 1		
							Sheet 2/2	