
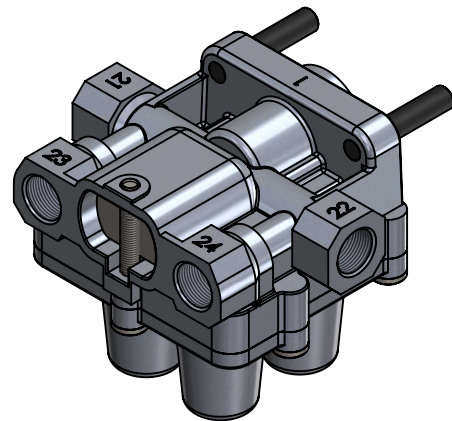
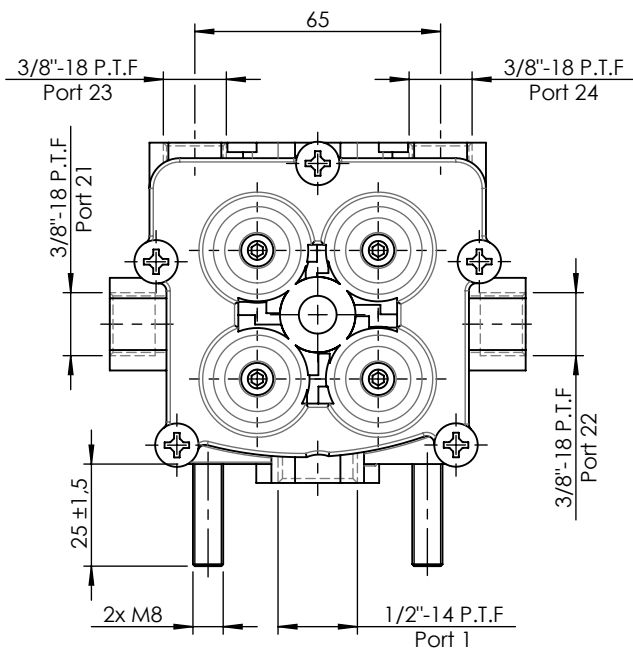
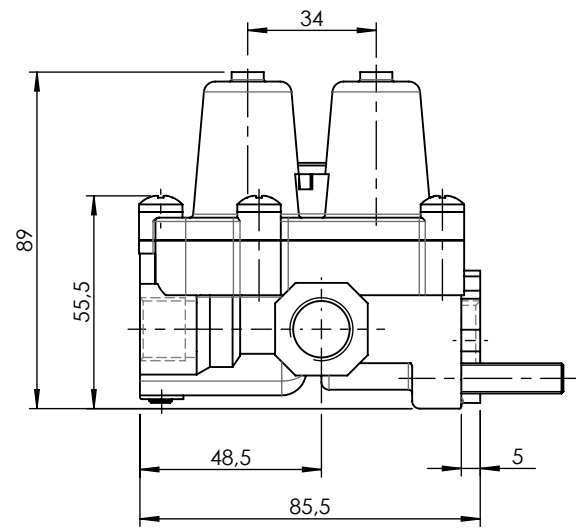
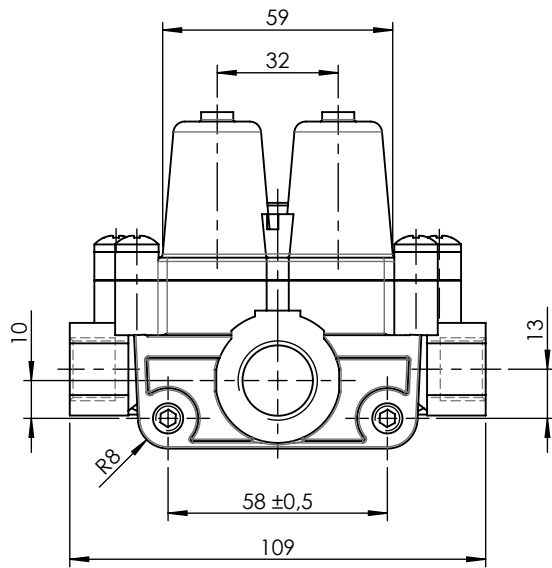


1		2		3		4																					
Technical sheet / Datos técnicos:																											
Part number adaptable to / Referencia adaptable a		9347140050																									
Operating pressure / Presión de trabajo		max. 13 bar																									
Permissible medium / Medio de funcionamiento		Air / Aire																									
Operating temperature range / Rango de temperatura		-40°C to / a +90°C																									
Weight / Peso		700 gr																									
<table><tr><th>Port / Conexión</th><th>Function / Función</th><th>Thread / Rosca</th></tr><tr><td>1</td><td>Supply / Alimentación</td><td>1/2"-14 P.T.F</td></tr><tr><td>21</td><td>Delivery / Salida</td><td>3/8"-18 P.T.F</td></tr><tr><td>22</td><td>Delivery / Salida</td><td>3/8"-18 P.T.F</td></tr><tr><td>23</td><td>Delivery / Salida</td><td>3/8"-18 P.T.F</td></tr><tr><td>24</td><td>Delivery / Salida</td><td>3/8"-18 P.T.F</td></tr></table>		Port / Conexión	Function / Función	Thread / Rosca	1	Supply / Alimentación	1/2"-14 P.T.F	21	Delivery / Salida	3/8"-18 P.T.F	22	Delivery / Salida	3/8"-18 P.T.F	23	Delivery / Salida	3/8"-18 P.T.F	24	Delivery / Salida	3/8"-18 P.T.F								
Port / Conexión	Function / Función	Thread / Rosca																									
1	Supply / Alimentación	1/2"-14 P.T.F																									
21	Delivery / Salida	3/8"-18 P.T.F																									
22	Delivery / Salida	3/8"-18 P.T.F																									
23	Delivery / Salida	3/8"-18 P.T.F																									
24	Delivery / Salida	3/8"-18 P.T.F																									
<table><tr><th>Circuit / Circuito</th><th>1</th><th>2</th><th>3</th><th>4</th></tr><tr><td>Port / Conexión</td><td>21</td><td>22</td><td>23</td><td>24</td></tr><tr><td>Opening pressure / Presión de apertura (bar)</td><td colspan="2">6,9⁰_{-0,3}</td><td colspan="2">6,9⁰_{-0,3}</td></tr><tr><td>Closing pressure dynamic / Presión de cierre dinámica (bar)</td><td colspan="2">≥ 4,8</td><td colspan="2">≥ 4,8</td></tr></table>		Circuit / Circuito	1	2	3	4	Port / Conexión	21	22	23	24	Opening pressure / Presión de apertura (bar)	6,9 ⁰ _{-0,3}		6,9 ⁰ _{-0,3}		Closing pressure dynamic / Presión de cierre dinámica (bar)	≥ 4,8		≥ 4,8							
Circuit / Circuito	1	2	3	4																							
Port / Conexión	21	22	23	24																							
Opening pressure / Presión de apertura (bar)	6,9 ⁰ _{-0,3}		6,9 ⁰ _{-0,3}																								
Closing pressure dynamic / Presión de cierre dinámica (bar)	≥ 4,8		≥ 4,8																								
Purpose / Propósito: To distribute clean and dry air from the air dryer to different pneumatic circuits. Ensure pressure in brake circuits in case of leaks or breakage in any circuit./ Distribuir el aire limpio y seco proveniente del secador a los diferentes circuitos neumáticos. Asegurar la presión en los circuitos de freno en caso de fuga o rotura en cualquier circuito.																											
Installation requirements / Requisitos para la instalación: The protection valve may be installed into the piping in any position. Mounting is accomplished by using two studs M8. / La válvula de protección puede instalarse en las tuberías en cualquier posición. El montaje se realiza mediante dos espárragos M8.																											
Modification		4		Drawn																							
3				29/08/13 O.V.																							
2				Checked																							
1		J.S.	02/06/21	Change of sheet format	29/08/13 A.L.																						
nº Modified		Date	Reason	General Tolerance	Assembly	-																					
Comments		-		Part name	Protection circuit valve																						
		Material		ID. Reference	2222404																						
		-		Scale: -																							
				Review: 1	Sheet 1/2																						
PG/18/02 rev.1 1		2		3		4																					



F	Modification	4				Drawn		F
		3				29/08/13 O.V.		
		2				Checked		
		1	J.S.	02/06/21	Change of sheet format	29/08/13 A.L.		
		nº	Modified	Date	Reason	General Tolerance		
Comments					ISO 2768 c-K	Part name	Protection circuit valve	
					Material	ID. Reference	2222404	
					-	Scale: 1/2		Sheet 2/2
						Review: 1		
PG/18/02 rev.1 1			2		3		4	