
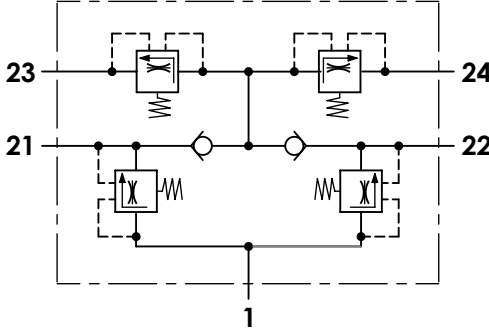




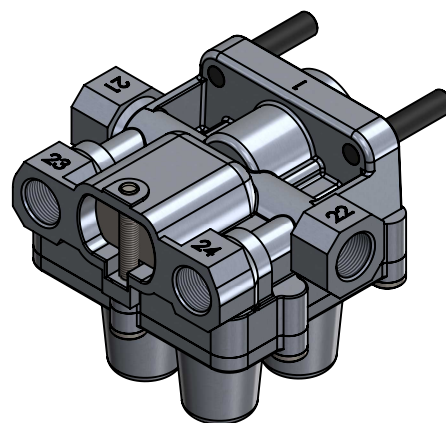
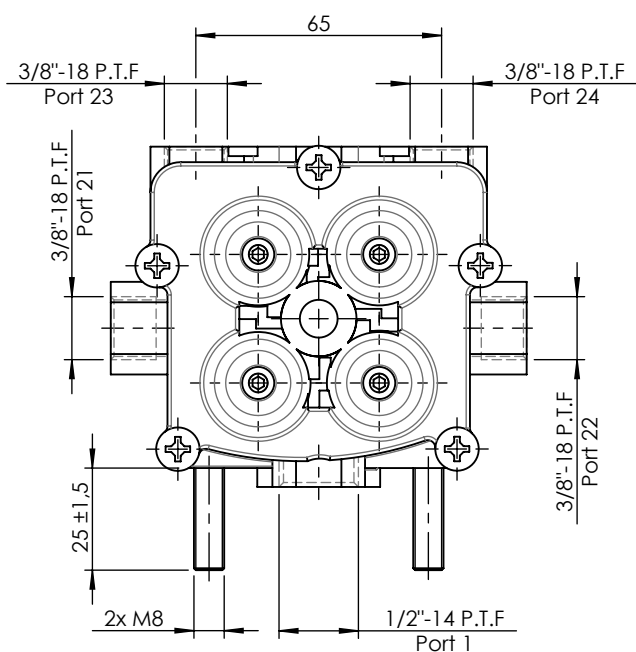
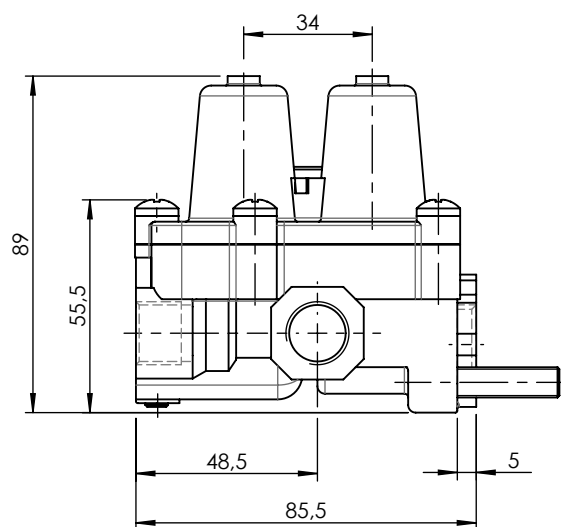
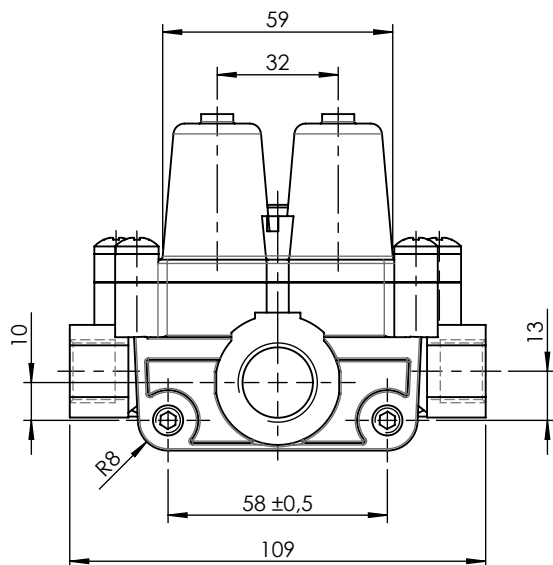


1		2		3		4																																																														
Technical sheet / Datos técnicos:																																																																				
Part number adaptable to / Referencia adaptable a		9347140180																																																																		
Operating pressure / Presión de trabajo		max. 13 bar																																																																		
Permissible medium / Medio de funcionamiento		Air / Aire																																																																		
Operating temperature range / Rango de temperatura		-40°C to / a +90°C																																																																		
Weight / Peso		700 gr																																																																		
																																																																				
<table><tr><th>Port / Conexión</th><th>Function / Función</th><th>Thread / Rosca</th></tr><tr><td>1</td><td>Supply / Alimentación</td><td>1/2"-14 P.T.F</td></tr><tr><td>21</td><td>Delivery / Salida</td><td>3/8"-18 P.T.F</td></tr><tr><td>22</td><td>Delivery / Salida</td><td>3/8"-18 P.T.F</td></tr><tr><td>23</td><td>Delivery / Salida</td><td>3/8"-18 P.T.F</td></tr><tr><td>24</td><td>Delivery / Salida</td><td>3/8"-18 P.T.F</td></tr></table>		Port / Conexión	Function / Función	Thread / Rosca	1	Supply / Alimentación	1/2"-14 P.T.F	21	Delivery / Salida	3/8"-18 P.T.F	22	Delivery / Salida	3/8"-18 P.T.F	23	Delivery / Salida	3/8"-18 P.T.F	24	Delivery / Salida	3/8"-18 P.T.F																																																	
Port / Conexión	Function / Función	Thread / Rosca																																																																		
1	Supply / Alimentación	1/2"-14 P.T.F																																																																		
21	Delivery / Salida	3/8"-18 P.T.F																																																																		
22	Delivery / Salida	3/8"-18 P.T.F																																																																		
23	Delivery / Salida	3/8"-18 P.T.F																																																																		
24	Delivery / Salida	3/8"-18 P.T.F																																																																		
<table><tr><th>Circuit / Circuito</th><th>1</th><th>2</th><th>3</th><th>4</th></tr><tr><td>Port / Conexión</td><td>21</td><td>22</td><td>23</td><td>24</td></tr><tr><td>Opening pressure / Presión de apertura (bar)</td><td colspan="2">6,3⁰_{-0,3}</td><td colspan="2">6,3⁰_{-0,3}</td></tr><tr><td>Closing pressure dynamic / Presión de cierre dinámica (bar)</td><td colspan="2">≥ 5,0</td><td colspan="2">≥ 5,0</td></tr></table>		Circuit / Circuito	1	2	3	4	Port / Conexión	21	22	23	24	Opening pressure / Presión de apertura (bar)	6,3 ⁰ _{-0,3}		6,3 ⁰ _{-0,3}		Closing pressure dynamic / Presión de cierre dinámica (bar)	≥ 5,0		≥ 5,0																																																
Circuit / Circuito	1	2	3	4																																																																
Port / Conexión	21	22	23	24																																																																
Opening pressure / Presión de apertura (bar)	6,3 ⁰ _{-0,3}		6,3 ⁰ _{-0,3}																																																																	
Closing pressure dynamic / Presión de cierre dinámica (bar)	≥ 5,0		≥ 5,0																																																																	
Purpose / Propósito: To distribute clean and dry air from the air dryer to different pneumatic circuits. Ensure pressure in brake circuits in case of leaks or breakage in any circuit. / Distribuir el aire limpio y seco proveniente del secador a los diferentes circuitos neumáticos. Asegurar la presión en los circuitos de freno en caso de fuga o rotura en cualquier circuito.																																																																				
Installation requirements / Requisitos para la instalación: The protection valve may be installed into the piping in any position. Mounting is accomplished by using two studs M8. / La válvula de protección puede instalarse en las tuberías en cualquier posición. El montaje se realiza mediante dos espárragos M8.																																																																				
<table><tr><td>4</td><td></td><td></td><td></td><td>Drawn</td><td colspan="3" rowspan="4"></td></tr><tr><td>3</td><td></td><td></td><td></td><td>29/08/13 O.V.</td></tr><tr><td>2</td><td></td><td></td><td></td><td>Checked</td></tr><tr><td>1</td><td>J.S.</td><td>02/06/21</td><td>Change of sheet format</td><td>29/08/13 A.L.</td></tr><tr><td>nº</td><td>Modified</td><td>Date</td><td>Reason</td><td>General Tolerance</td><td>Assembly</td><td colspan="3">-</td></tr><tr><td colspan="4">Comments</td><td>-</td><td>Part name</td><td colspan="3">Protection circuit valve</td></tr><tr><td colspan="4"></td><td>Material</td><td>ID. Reference</td><td colspan="3">2222414</td></tr><tr><td colspan="4"></td><td>-</td><td>Scale: -</td><td colspan="3" rowspan="2"></td></tr><tr><td colspan="4"></td><td>-</td><td>Review: 1</td></tr></table>		4				Drawn				3				29/08/13 O.V.	2				Checked	1	J.S.	02/06/21	Change of sheet format	29/08/13 A.L.	nº	Modified	Date	Reason	General Tolerance	Assembly	-			Comments				-	Part name	Protection circuit valve							Material	ID. Reference	2222414							-	Scale: -								-	Review: 1	Sheet 1/2	
4				Drawn																																																																
3				29/08/13 O.V.																																																																
2				Checked																																																																
1	J.S.	02/06/21	Change of sheet format	29/08/13 A.L.																																																																
nº	Modified	Date	Reason	General Tolerance	Assembly	-																																																														
Comments				-	Part name	Protection circuit valve																																																														
				Material	ID. Reference	2222414																																																														
				-	Scale: -																																																															
				-	Review: 1																																																															
PG/18/02 rev.1 1		2		3		4																																																														



F	Modification	4				Drawn			F
		3				29/08/13 O.V.			
		2				Checked			
		1	J.S.	02/06/21	Change of sheet format	29/08/13 A.L.			
		nº	Modified	Date	Reason	General Tolerance			
	Comments					ISO 2768 c-K	Part name	Protection circuit valve	
					Material	ID. Reference	2222414		
					-	Scale: 1/2		Sheet 2/2	
						Review: 1			
PG/18/02 rev.1 1					2	3	4		