

A





AD


F

F

The unloader valve should be installed so that the exhaust port points downwards. Mounting is accomplished with two M8 screws. / El regulador debe instalarse de forma que el escape quede orientado hacia abajo. El montaje se realiza con dos tornillos M8.

F

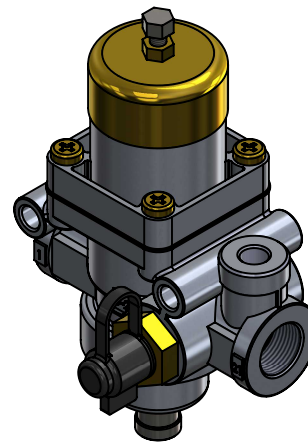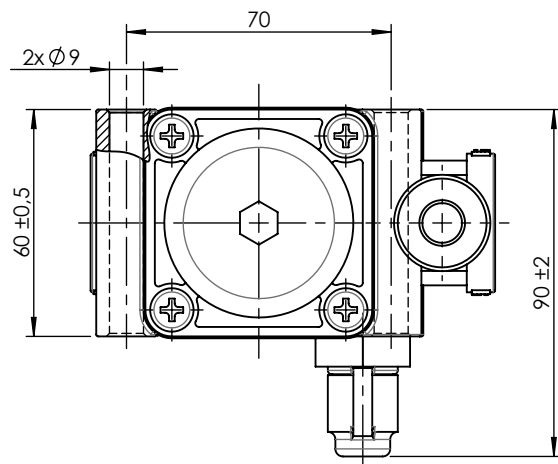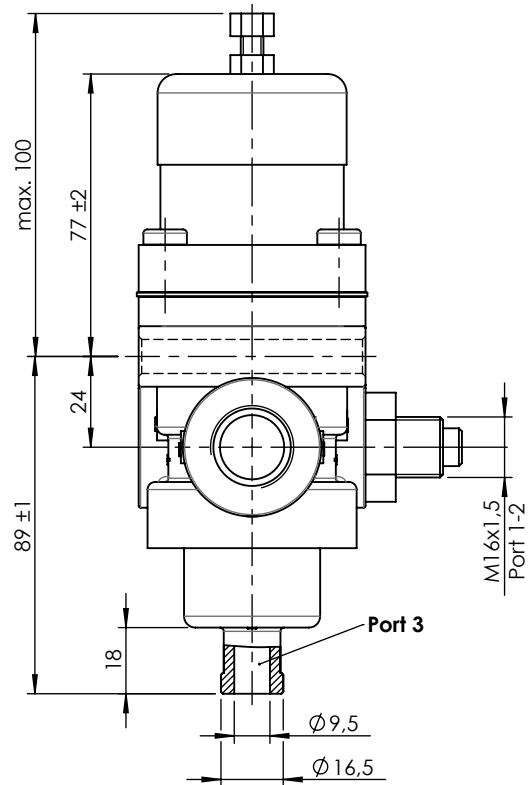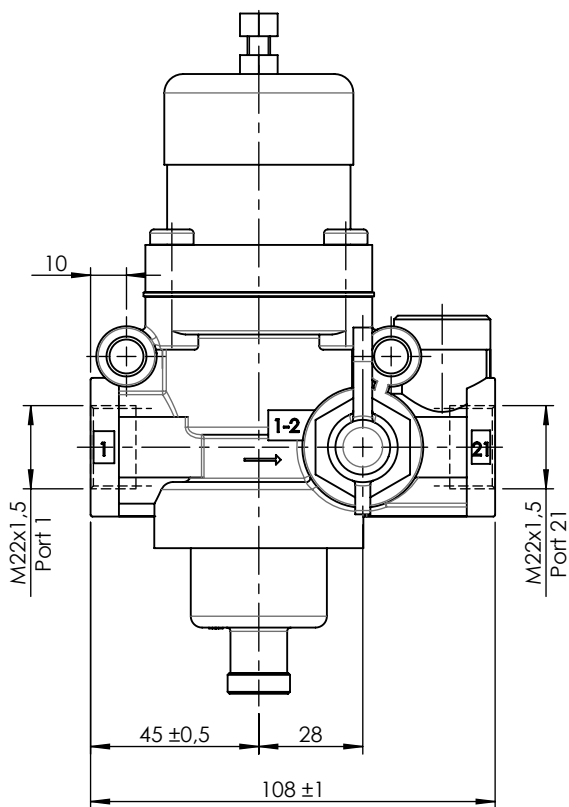

F	Modification	4				Drawn			F
		3				01/08/14 A.U.			
		2				Checked			
		1				01/08/14 A.L.			
		nº	Modified	Date	Reason	General Tolerance	Assembly	-	
Comments					ISO 2768 c-K	Part name	Unloader valve		
					Material	ID. Reference	2228112		
					-	Scale: 1/2			
						Review: 0			
PG/18/02 rev.1 1				2	3		4		