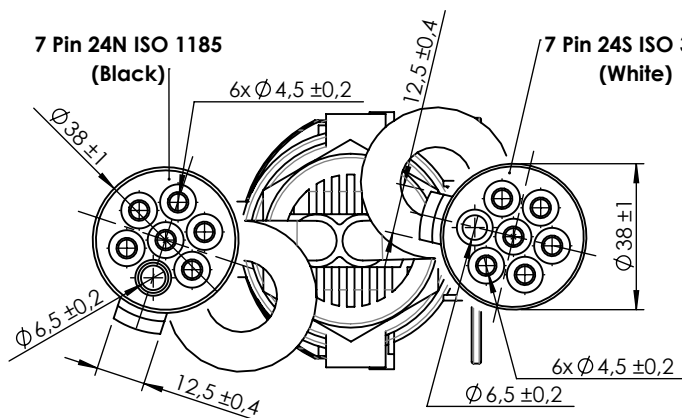
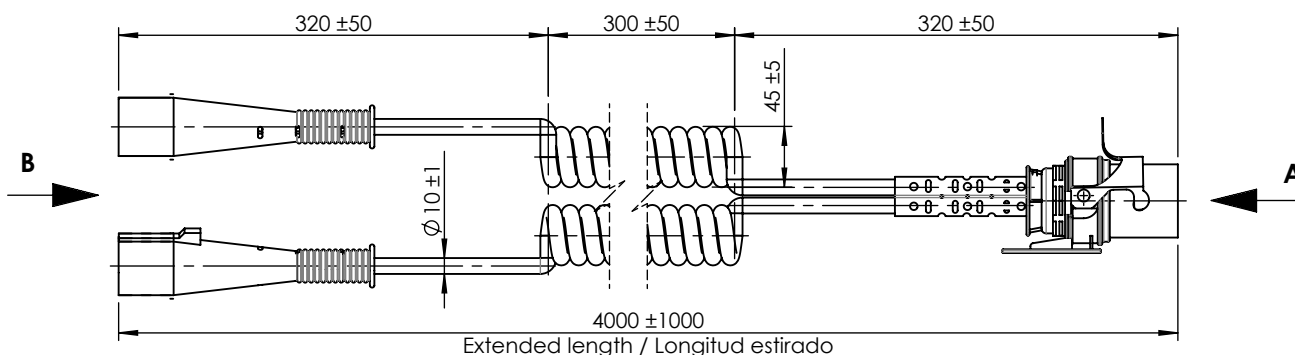
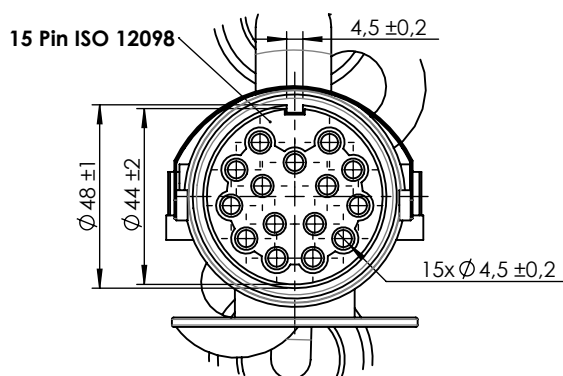


Technical data/ Datos técnicos:

According to/ En referencia a:	2260135
Operating temperature range/ Rango de temperatura:	-40°C to/a 80°C
Weight/ Peso:	1591 gr



VIEW / VISTA B
SCALE / ESCALA 1 : 2



VIEW / VISTA A
SCALE / ESCALA 1 : 2



Modification	4				
	3				
	2	S.F.	20/09/23	Change the values of the total extended length and the lenght of the rolled part	
	1	J.S.	23/08/21	Add table of continuity between pins	
nº	Modified	Date	Reason	General Tolerance	Assembly
Comments				ISO 2768 c-K	Part name
				Material	ID. Reference
				-	Scale: 1/5
					Review: 2

Drawn
25/08/20 S.F.
Checked
25/08/20 E.L.

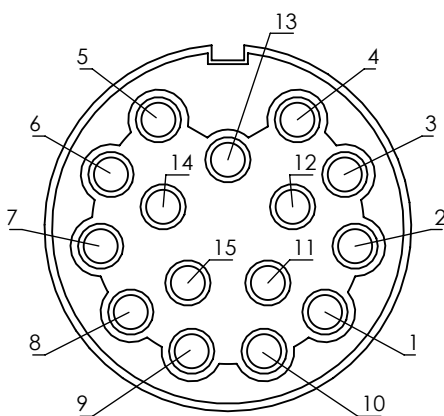
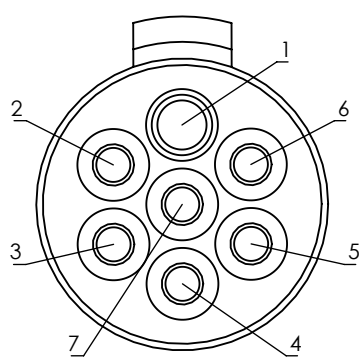
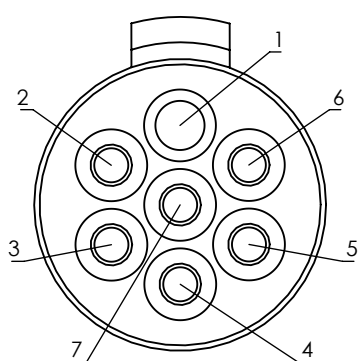



cojali

Serpentine 15Terminal 24V Type-S/N Mercedes/
Serpentina 15Pin 24V Tipo-S/N Mercedes

2260135



Sheet
1/2

1		2		3		4																																																														
A		<table><thead><tr><th colspan="3">Continuity between pins / Continuidad entre pines</th></tr><tr><th>15 Pin ISO 12098</th><th>7 Pin 24N ISO 1185 (Black)</th><th>7 Pin 24S ISO 3731 (White)</th></tr></thead><tbody><tr><td>1</td><td>3</td><td>-</td></tr><tr><td>2</td><td>5</td><td>-</td></tr><tr><td>3</td><td>-</td><td>7</td></tr><tr><td>4</td><td>1</td><td>1</td></tr><tr><td>5</td><td>2</td><td>-</td></tr><tr><td>6</td><td>6</td><td>-</td></tr><tr><td>7</td><td>4</td><td>-</td></tr><tr><td>8</td><td>-</td><td>3</td></tr><tr><td>9</td><td>-</td><td>4, 6</td></tr><tr><td>10</td><td>-</td><td>-</td></tr><tr><td>11</td><td>-</td><td>-</td></tr><tr><td>12</td><td>-</td><td>5</td></tr><tr><td>13</td><td>-</td><td>-</td></tr><tr><td>14</td><td>-</td><td>-</td></tr><tr><td>15</td><td>7</td><td>-</td></tr></tbody></table>						Continuity between pins / Continuidad entre pines			15 Pin ISO 12098	7 Pin 24N ISO 1185 (Black)	7 Pin 24S ISO 3731 (White)	1	3	-	2	5	-	3	-	7	4	1	1	5	2	-	6	6	-	7	4	-	8	-	3	9	-	4, 6	10	-	-	11	-	-	12	-	5	13	-	-	14	-	-	15	7	-	A									
Continuity between pins / Continuidad entre pines																																																																				
15 Pin ISO 12098	7 Pin 24N ISO 1185 (Black)	7 Pin 24S ISO 3731 (White)																																																																		
1	3	-																																																																		
2	5	-																																																																		
3	-	7																																																																		
4	1	1																																																																		
5	2	-																																																																		
6	6	-																																																																		
7	4	-																																																																		
8	-	3																																																																		
9	-	4, 6																																																																		
10	-	-																																																																		
11	-	-																																																																		
12	-	5																																																																		
13	-	-																																																																		
14	-	-																																																																		
15	7	-																																																																		
B								B																																																												
C								C																																																												
D		 15 Pin ISO 12098  7 Pin 24N ISO 1185 (Black)  7 Pin 24S ISO 3731 (White)						D																																																												
E								E																																																												
F		<table><tr><td rowspan="5">Modification</td><td>4</td><td></td><td></td><td></td><td>Drawn</td><td rowspan="5"></td><td rowspan="5">F</td></tr><tr><td>3</td><td></td><td></td><td></td><td>25/08/20 S.F.</td></tr><tr><td>2</td><td>S.F.</td><td>20/09/23</td><td>Change the values of the total extended length and the lenght of the rolled part</td><td>Checked</td></tr><tr><td>1</td><td>J.S.</td><td>23/08/21</td><td>Add table of continuity between pins</td><td>25/08/20 E.L.</td></tr><tr><td>nº</td><td>Modified</td><td>Date</td><td>Reason</td><td>General Tolerance</td><td>Assembly</td></tr><tr><td colspan="4">Comments</td><td>ISO 2768 c-K</td><td>Part name</td><td colspan="2">Serpentine 15Terminal 24V Type-S/N Mercedes/ Serpentina 15Pin 24V Tipo-S/N Mercedes</td></tr><tr><td colspan="4"></td><td>Material</td><td>ID. Reference</td><td colspan="2">2260135</td></tr><tr><td colspan="4"></td><td>-</td><td>Scale: 1/1</td><td rowspan="2"></td><td rowspan="2">Sheet 2/2</td></tr><tr><td colspan="4"></td><td></td><td>Review: 2</td></tr></table>						Modification	4				Drawn		F	3				25/08/20 S.F.	2	S.F.	20/09/23	Change the values of the total extended length and the lenght of the rolled part	Checked	1	J.S.	23/08/21	Add table of continuity between pins	25/08/20 E.L.	nº	Modified	Date	Reason	General Tolerance	Assembly	Comments				ISO 2768 c-K	Part name	Serpentine 15Terminal 24V Type-S/N Mercedes/ Serpentina 15Pin 24V Tipo-S/N Mercedes						Material	ID. Reference	2260135						-	Scale: 1/1		Sheet 2/2						Review: 2		
Modification	4				Drawn		F																																																													
	3				25/08/20 S.F.																																																															
	2	S.F.	20/09/23	Change the values of the total extended length and the lenght of the rolled part	Checked																																																															
	1	J.S.	23/08/21	Add table of continuity between pins	25/08/20 E.L.																																																															
	nº	Modified	Date	Reason	General Tolerance			Assembly																																																												
Comments				ISO 2768 c-K	Part name	Serpentine 15Terminal 24V Type-S/N Mercedes/ Serpentina 15Pin 24V Tipo-S/N Mercedes																																																														
				Material	ID. Reference	2260135																																																														
				-	Scale: 1/1		Sheet 2/2																																																													
					Review: 2																																																															
PG/18/02 rev.1 1		2		3		4																																																														