


Technical data/ Datos técnicos:

According to / En referencia a:	1615081
Operating temperature range/Rango de temperatura:	-40°C a/to 80°C
Supply voltage/Voltaje:	24V DC ±5%
Weight/Peso:	342 gr

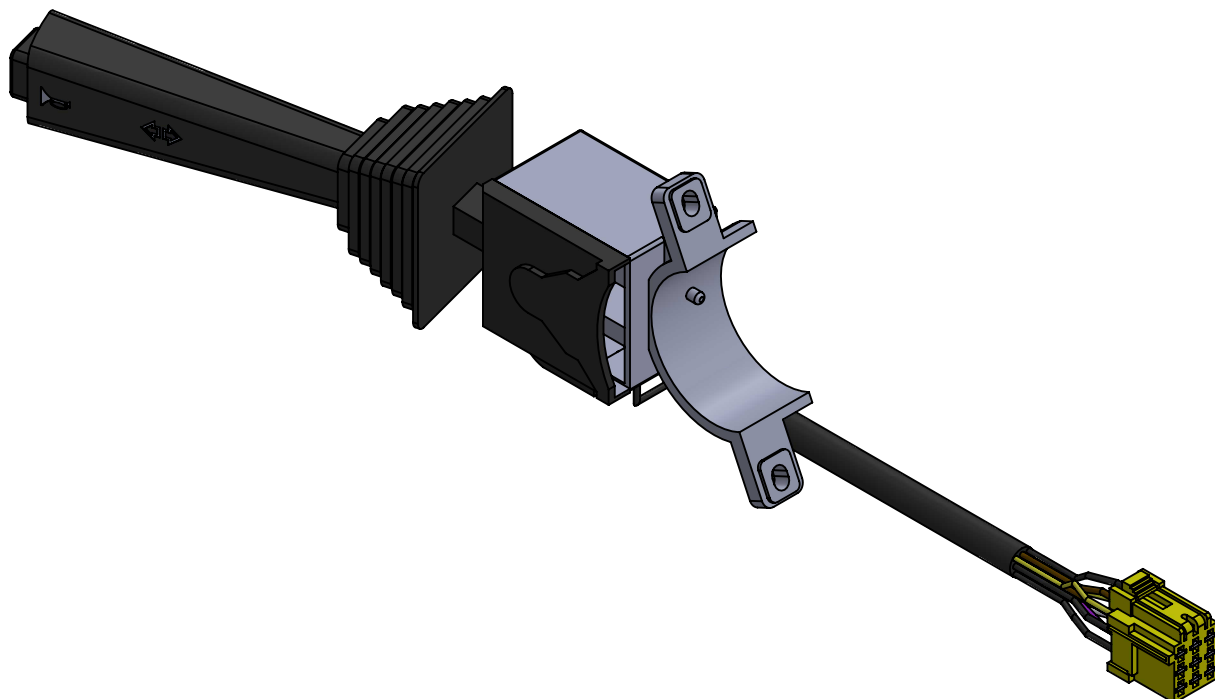

Purpose / Propósito: Activate the turn signals of the vehicle, long-range and short-range lights, main beam flash and the horn/ Permite activar los intermitentes del vehículo, las luces de largo y corto alcance, hacer ráfagas y la bocina.

Installation Requirements / Requisitos para la instalación: fix the switch in the steering column housing, using the 2 holes located in the body of the switch / Ubicar el interruptor en el alojamiento de la columna de dirección, utilizando los 2 anclajes situados en el cuerpo del mismo.

Modification	4				Drawn
	3				21/09/20 S.F.
	2				Checked
	1				21/09/20 E.L.
	nº	Modified	Date	Reason	General Tolerance
Comments					Assembly
					Part name
					ID. Reference
					Scale: -
					Review: 0


cojali


Combination Switch/Interruptor de columna

2260194



Sheet
1/2

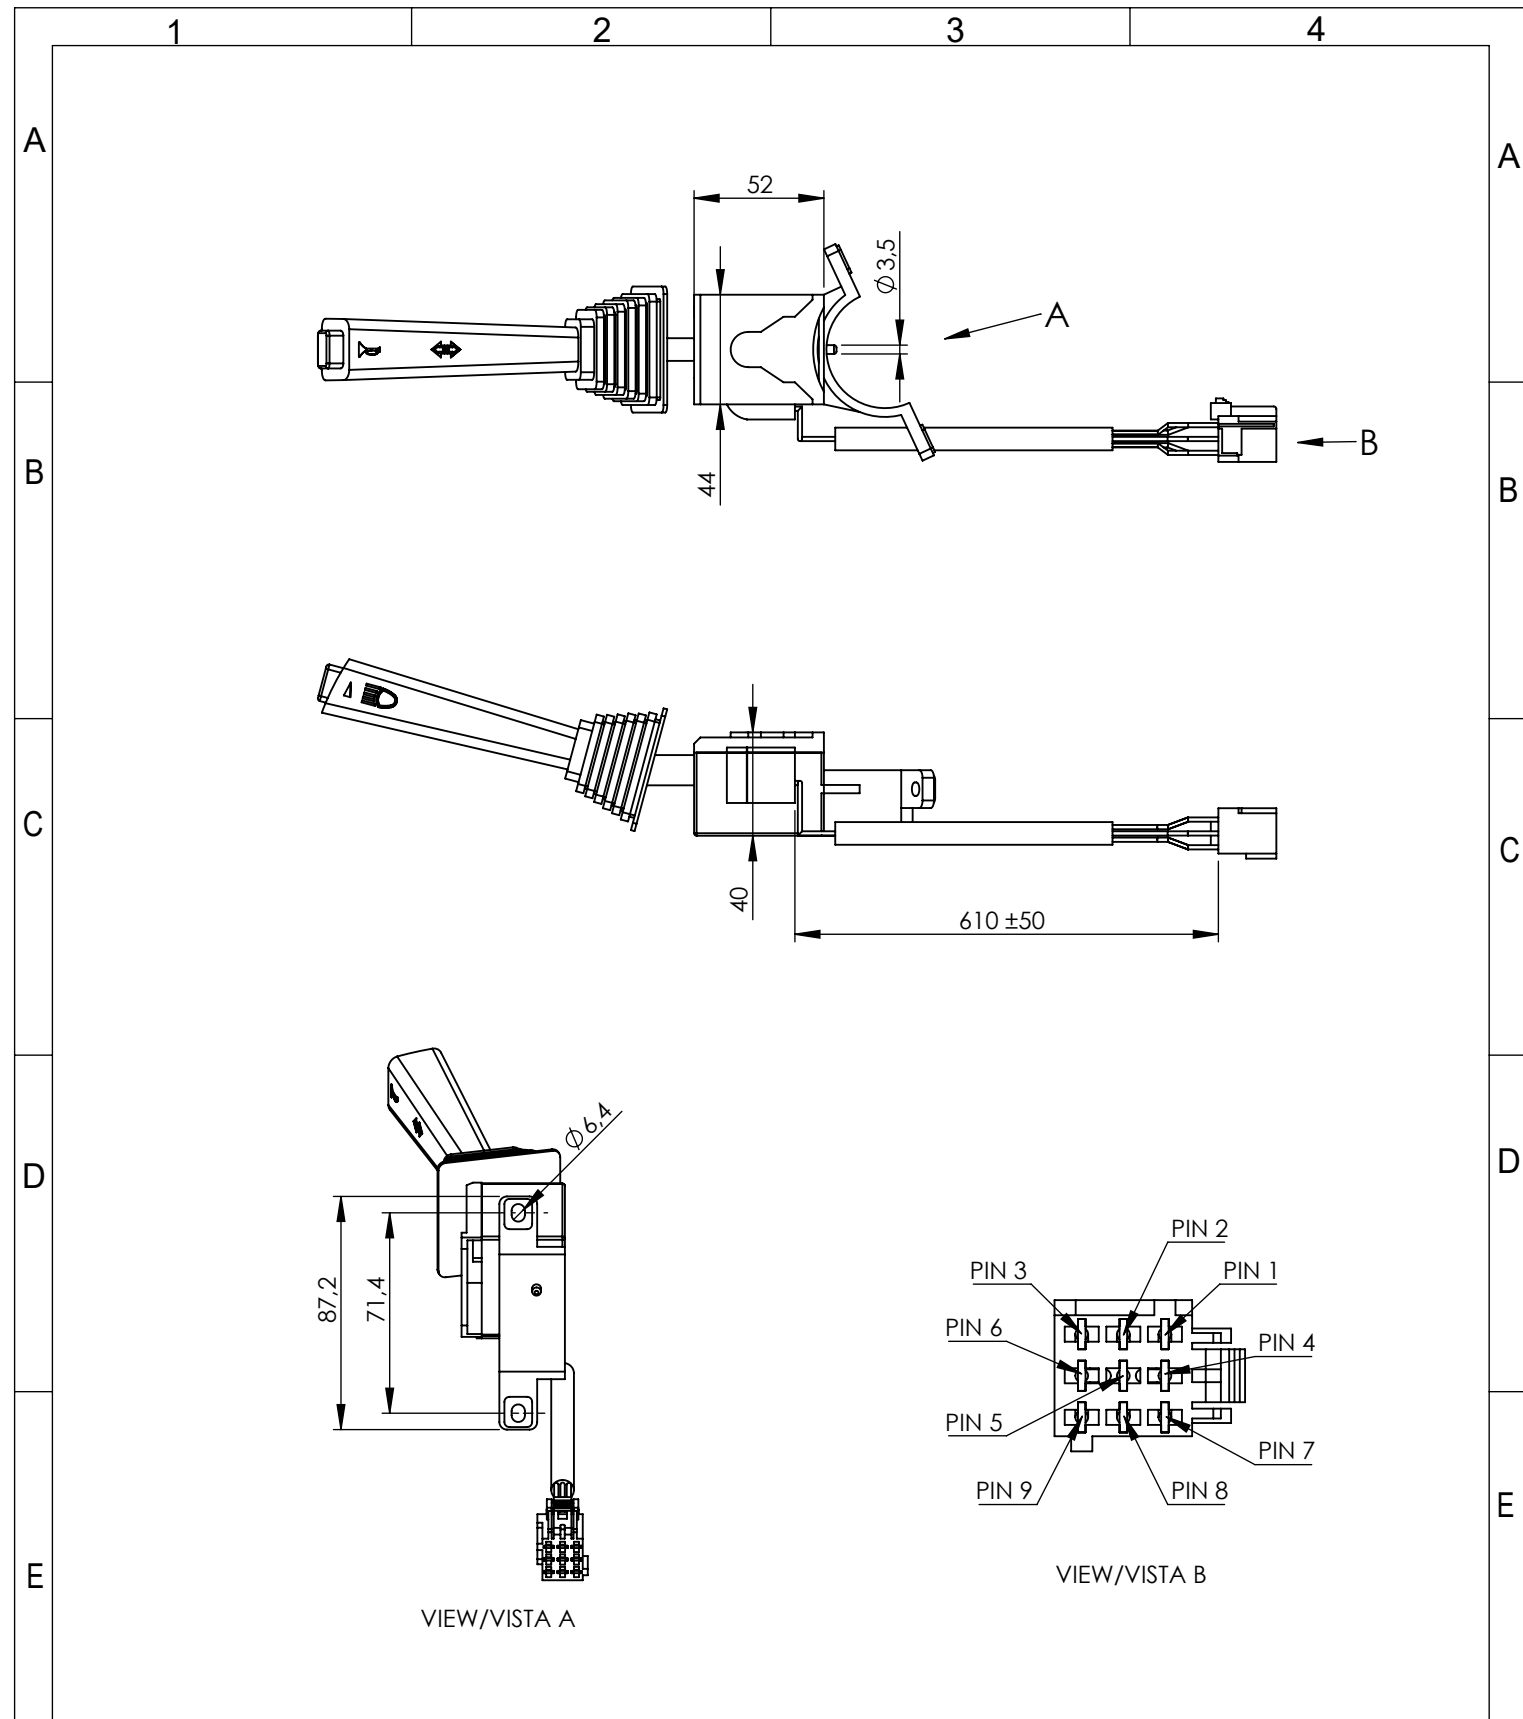

F	Modification	4				Drawn			F
		3				21/09/20 S.F.			
		2				Checked			
		1				21/09/20 E.L.			
		nº	Modified	Date	Reason	General Tolerance			
	Comments					ISO 2768 c-K	Part name	Combination Switch/Interruptor de columna	
					Material	ID. Reference	2260194		
					-	Scale: 1/3			Sheet 2/2
						Review: 0			
PG/18/02 rev.1 1			2			3		4	