


Technical data/ Datos técnicos:

According to / En referencia a:	1579255
Operating temperature range/Rango de temperatura:	-40°C a/to 80°C
Supply voltage/Voltaje:	24V DC ±5%
Weight/Peso:	283 gr




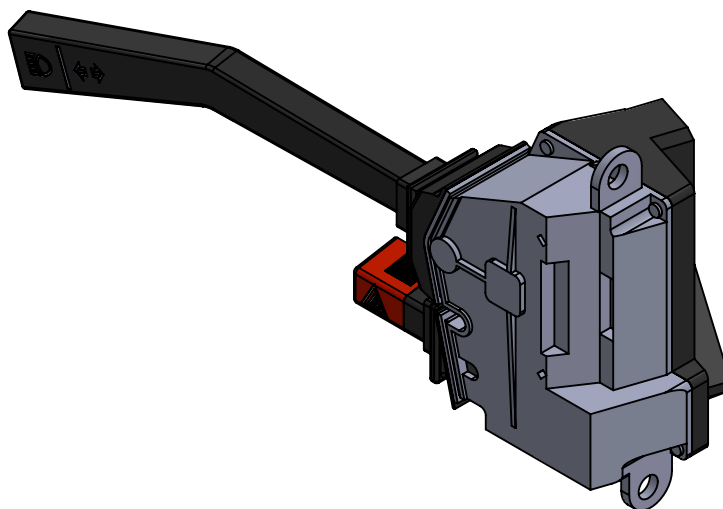


Purpose / Propósito: Activate the turn signals of the vehicle, long-range lights and emergency lights/ Permite activar los intermitentes del vehículo, las luces de largo alcance y las luces de emergencia.

Installation Requirements / Requisitos para la instalación: fix the switch in the steering column housing, using the 2 holes located in the body of the switch / Ubicar el interruptor en el alojamiento de la columna de dirección, utilizando los 2 anclajes situados en el cuerpo del mismo.

Modification	4				Drawn		
	3				22/09/20 S.F.		
	2				Checked		
	1				22/09/20 E.L.		
	nº	Modified	Date	Reason	General Tolerance	Assembly	
Comments					ISO 2768 c-K	Part name	Combination Switch/Interruptor de columna
					Material	ID. Reference	2260199
					-	Scale: -	
					-	Review: 0	



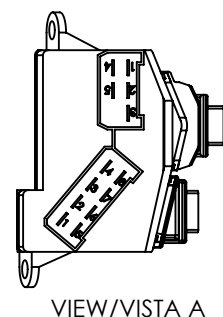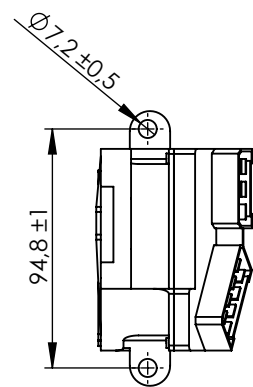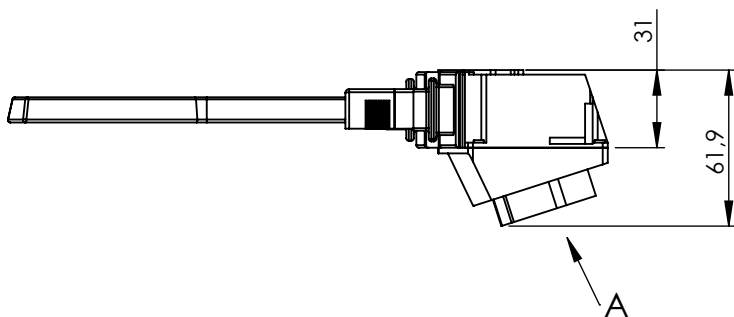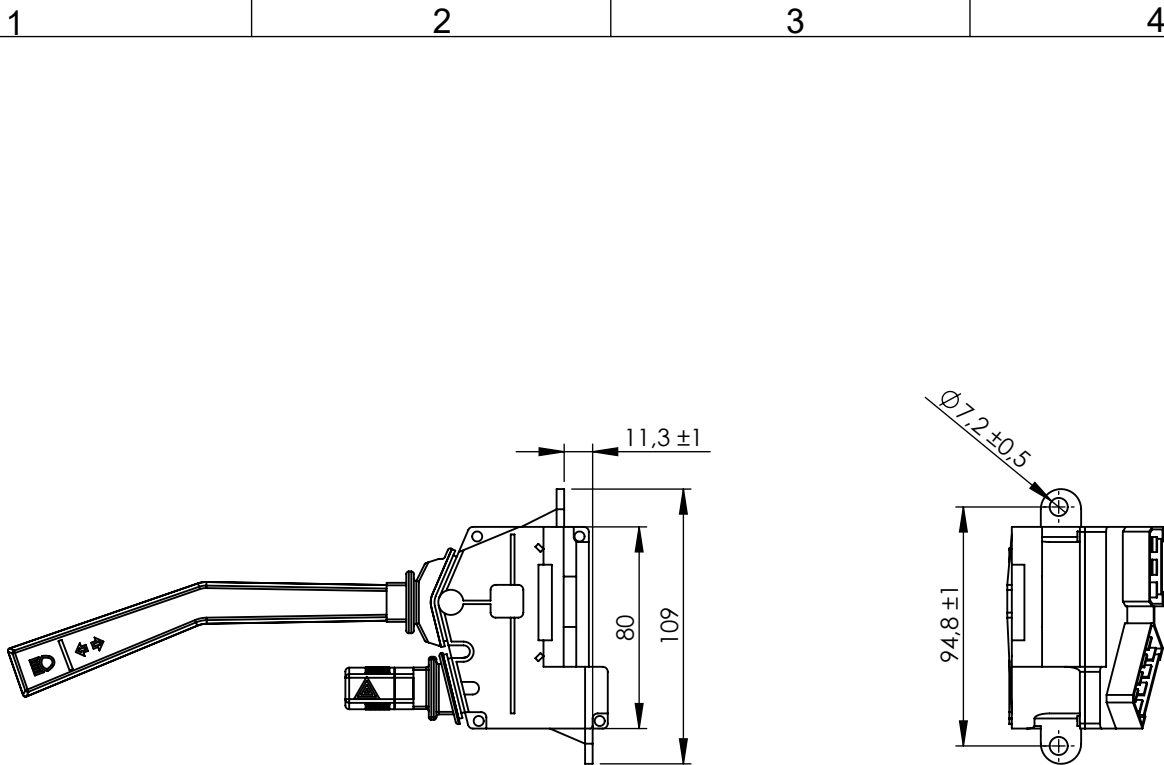

F	Modification	4				Drawn		F
		3				22/09/20 S.F.		
		2				Checked		
		1				22/09/20 E.L.		
	nº	Modified	Date	Reason	General Tolerance	Assembly		
Comments					ISO 2768 c-K	Part name	Combination Switch/Interruptor de columna	
					Material	ID. Reference	2260199	
					-	Scale: 1/3		Sheet 2/2
					-	Review: 0		
PG/18/02 rev.1 1					2	3	4	