
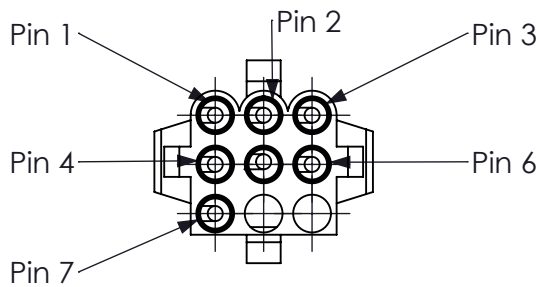


**Technical data/ Datos técnicos:**


Part adaptable to / Referencia adaptable a:	1424970
Operating temperature range / Rango de temperatura:	- 40°C a / to +80°C
Supply Voltage / Voltaje:	24 V DC ± 5%
Weight / Peso:	270 gr

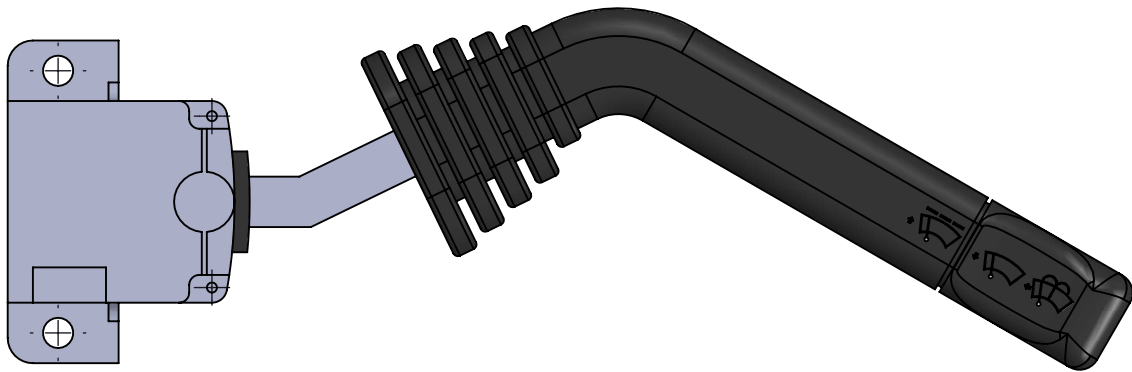

**Purpose / Propósito:** Activate and select the windscreen wiper's frequency/ Permite activar la bomba de agua y los limpiaparabrisas, además de ajustar la frecuencia de barrido.

**Installation Requirements / Requisitos para la instalación:** fix the switch in the steering column housing, using the 2 holes located in the body of the switch / Atornillar el interruptor en el alojamiento de la columna de dirección, utilizando los 2 anclajes situados en el cuerpo del mismo.

Modification	4				Drawn			
	3				24/02/15 L-S.			
	2				Checked			
	1				24/02/15 A.L.			
	nº	Modified	Date	Reason	General Tolerance		Assembly	
Comments					-	Part name	Combination Switch/Interruptor de columna	
					Material	ID. Reference	2260225	
					-	Scale: -		Sheet 1/1
					-	Review: 0		

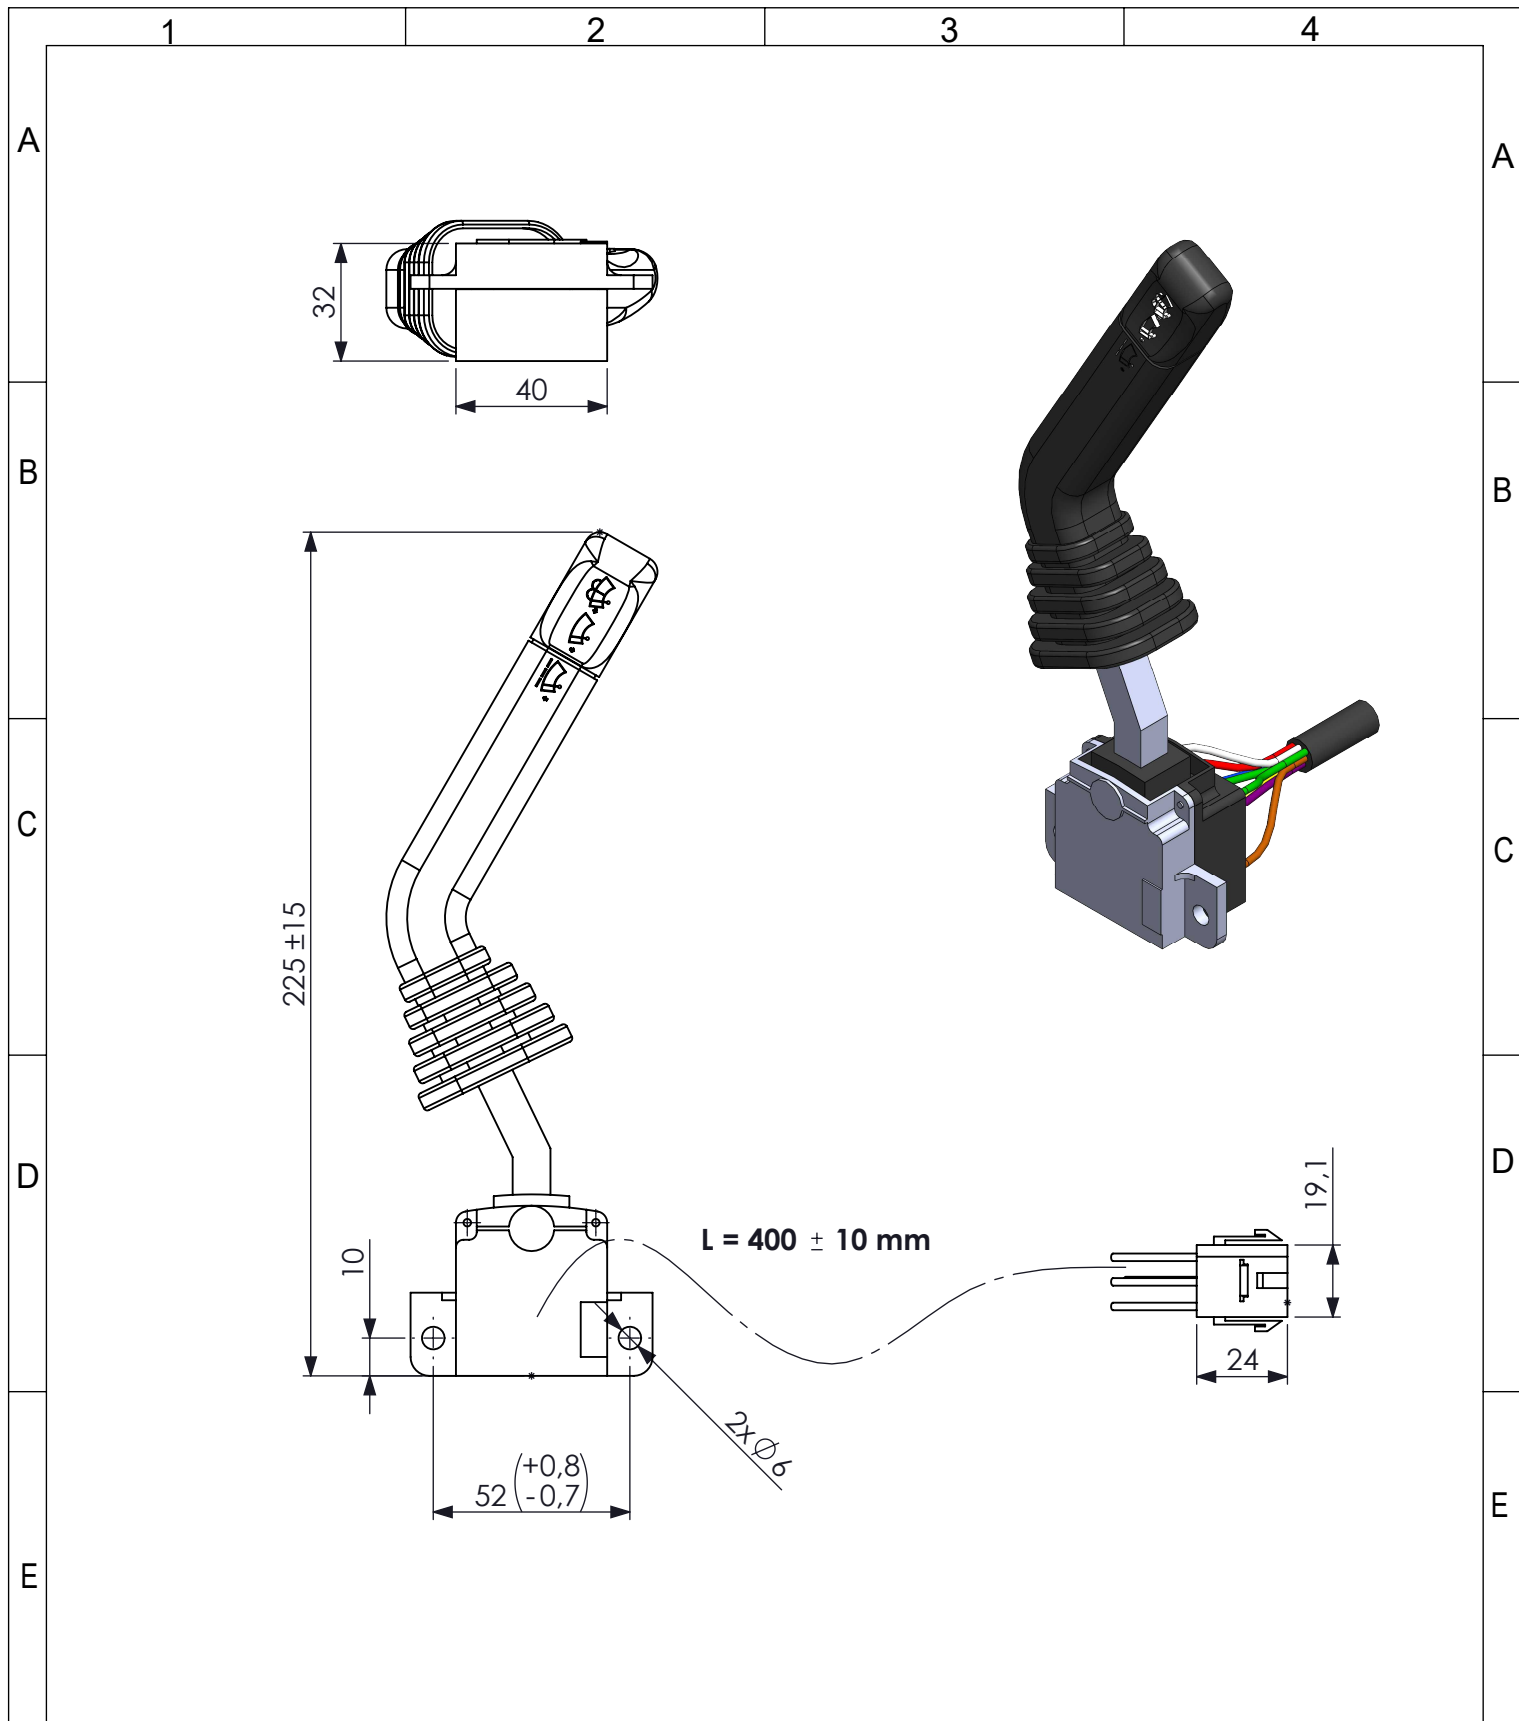

F	Modification					Drawn	
	4					24/02/15 L-S.	
	3					Checked	
	2					24/02/15 A.L.	
	1						
nº	Modified	Date	Reason	General Tolerance	Assembly	-	
Comments				ISO 2768 c-K	Part name	Combination Switch/Interruptor de columna	
				Material	ID. Reference	2260225	
				-	Scale: 1/2		Sheet 1/1
				-	Review: 0		