




Technical data/ Datos técnicos:

According to / En referencia a:	3172170
Operating temperature range/Rango de temperatura:	-40°C a/to 80°C
Supply voltage/Voltaje:	24V DC ±5%
Weight/Peso:	370 gr

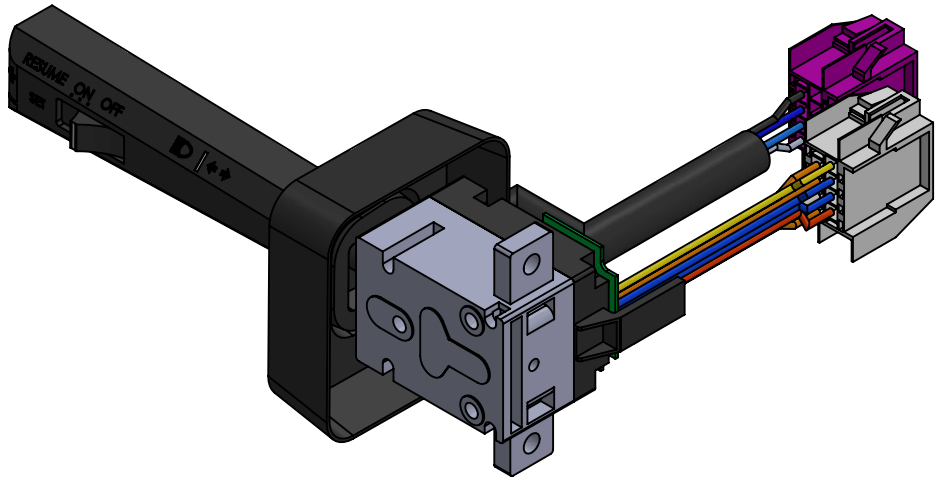

Purpose / Propósito: Activate the turn signals of the vehicle, main beam flash, long-range and short-range lights ON/OFF key, SET key and RESUME key/ Permite activar los intermitentes del vehículo, hacer ráfagas, luces de largo y corto alcance y activar las teclas ON/OFF, SET y RESUME.

Installation Requirements / Requisitos para la instalación: fix the switch in the steering column housing, using the 2 holes located in the body of the switch / Ubicar el interruptor en el alojamiento de la columna de dirección, utilizando los 2 anclajes situados en el cuerpo del mismo.

F	Modification nº	4				Drawn		
		3				22/09/20 S.F.		
		2				Checked		
		1				22/09/20 E.L.		
		nº	Modified	Date	Reason	General Tolerance	Assembly	-
Comments						ISO 2768 c-K	Part name	Combination Switch/Interruptor de columna
						Material	ID. Reference	2260230
						-	Scale: -	
						-	Review: 0	

1

2


3

4

A


A

4 PIN CONNECTOR




4 PIN CONNECTOR

8 PIN CONNECTOR

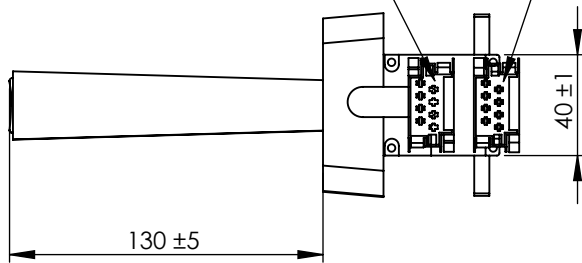


B

8 PIN CONNECTOR



C

C

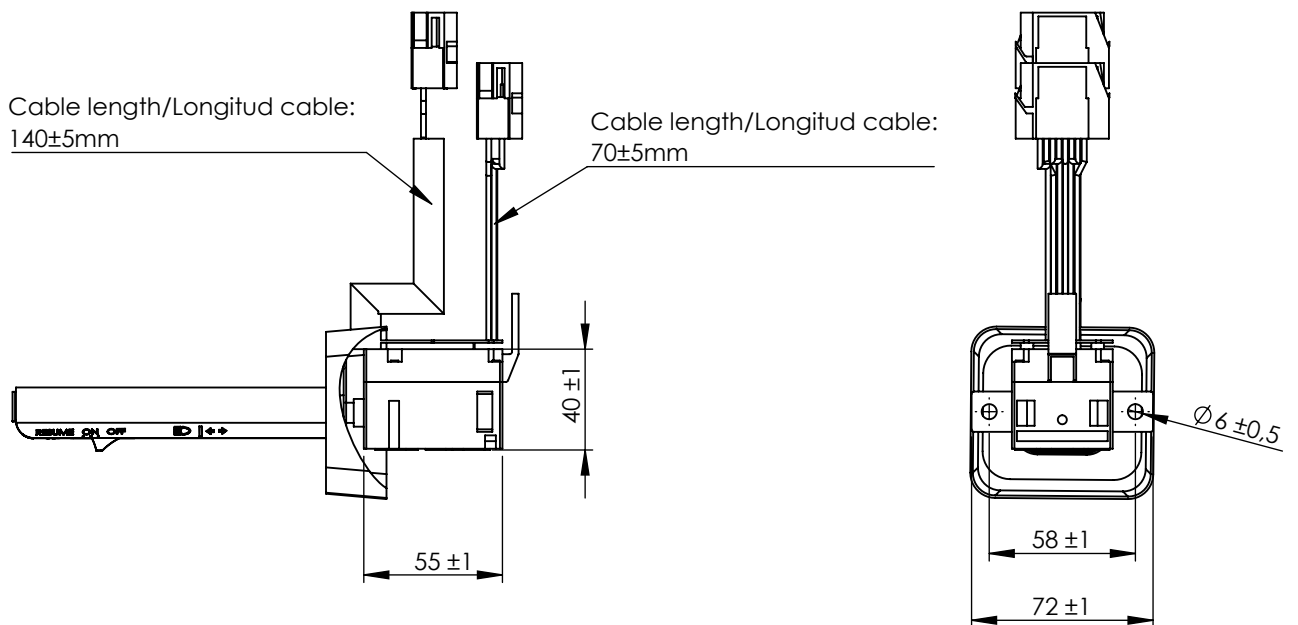

D

E

E

F	Modification	4				Drawn		F
		3				22/09/20 S.F.		
		2				Checked		
		1				22/09/20 E.L.		
		nº	Modified	Date	Reason	General Tolerance		
Comments					ISO 2768 c-K	Part name	Combination Switch/Interruptor de columna	
					Material	ID. Reference	2260230	
					-	Scale: 1/3		Sheet 2/2
					-	Review: 0		