

1

2

3

4

A


Technical Data/ Datos Técnicos:

A

Part number adaptable to/ Referencia adaptable a:	SZ1159
Hydraulic fluid/ Fluido hidráulico:	Air/Aire
Thermal range/ Rango de temperatura:	-30 °C to/a +100 °C
Supply pressure/ Presión de alimentación:	max. 10 bar
Stroke/ Carrera:	32 mm
Weight/ Peso:	340 gr

B

B

**Pneumatic scheme
/
Esquema neumático**

C


C

D

D

E




E

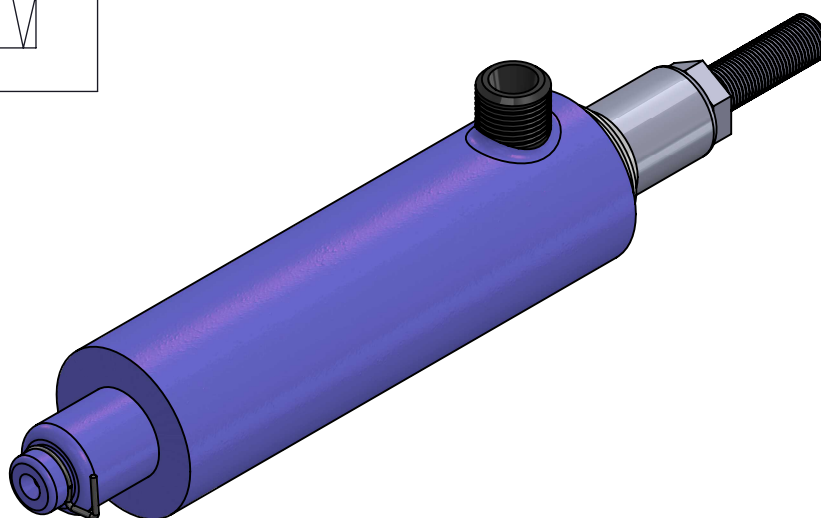


F

F

Modification	4					Drawn	
	3					02/09/20 S.F.	
	2					Checked	
	1					02/09/20 O.V.	
nº	Modified	Date	Reason	General Tolerance	Assembly	-	
Comments				-	Part name	Operating cylinder/Cilindro operacional	
				Material	ID. Reference	2301203	
				-	Scale: -		
					Review: 0		Sheet 1/2

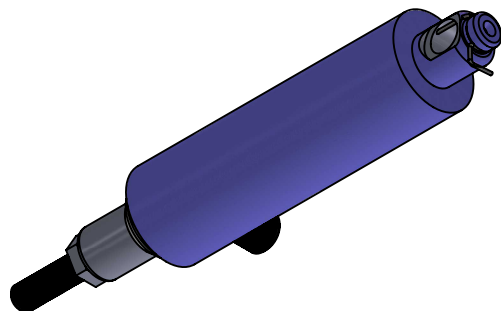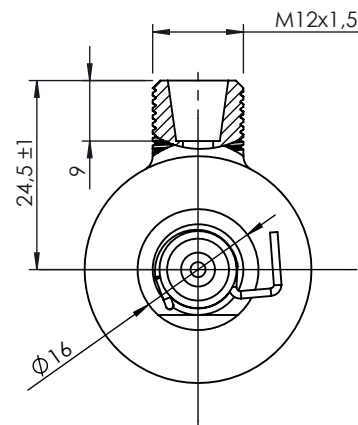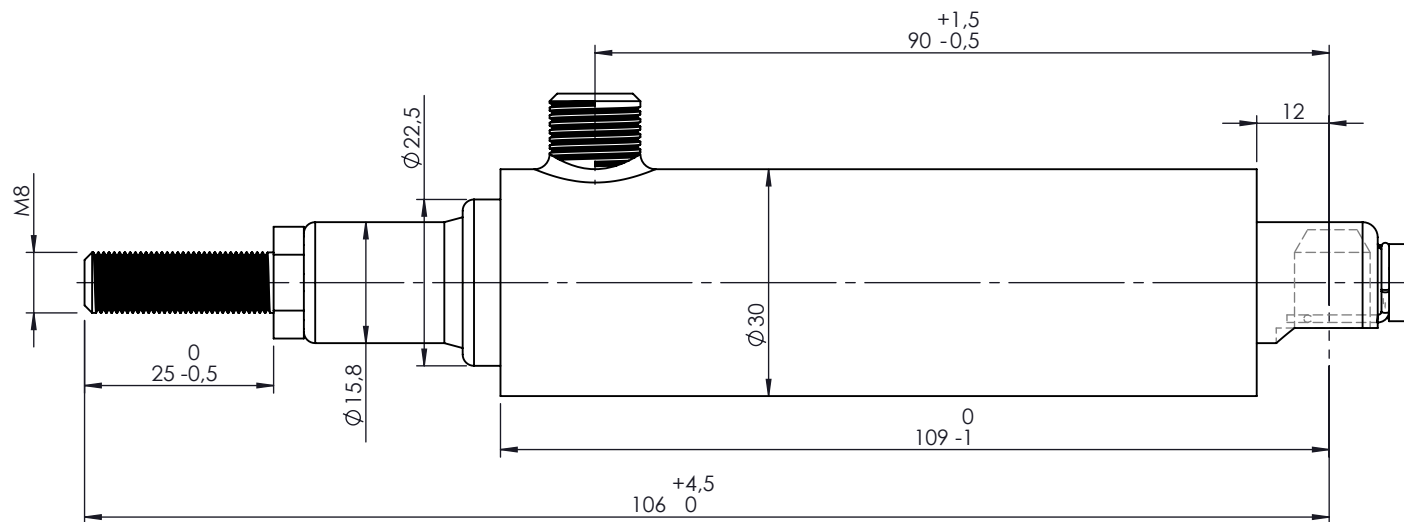

Modification	4				Drawn	
	3				02/09/20 S.F.	
	2				Checked	
	1				02/09/20 O.V.	
	nº	Modified	Date	Reason	General Tolerance	
Comments					Assembly	-
					Part name	Operating cylinder/Cilindro operacional
					Material	2301203
					Scale: -	
					Review: 0	

Sheet
2/2