

1

2

3

4

A

Technical sheet / Datos técnicos:

Part number adaptable to / Referencia adaptable a	K019820
Operating pressure / Presión de trabajo	max. 13 bar
Voltage / Voltaje	24 V
Permissible medium / Medio de funcionamiento	Air / Aire
Operating temperature range / Rango de temperatura	-40°C to / a +80°C
Weight / Peso	1050 gr

B

C

Port / Conexión	Function / Función	Thread / Rosca
11	Supply / Alimentación	M16x1,5
21	Delivery / Salida	M16x1,5
22	Delivery / Salida	M16x1,5
23	Delivery / Salida	M16x1,5
3	Exhaust / Escape	Silencer / Silencioso
6	Electric connection / Conexión eléctrica	Bayonet DIN 72585 A1-4

D

Purpose / Propósito:

Pressure regulation of the suspension bellows through the activation of solenoids valves according to suspension ECU electric signal. / Regulación de la presión en los colchones de suspensión mediante la activación de solenoides a través de las señales eléctricas de la ECU de suspensión.

E

Installation requirements / Requisitos para la instalación:

The valve must be installed so that the exhaust port is horizontal position. Mounting is accomplished with two M8 mounting bolts. / La válvula se debe instalar de forma que el escape esté en posición horizontal. El montaje se realiza mediante dos pernos de montaje M8.

F




Modification	4				Drawn			
	3				10/12/19 R.A.			
	2				Checked			
	1				10/12/19 O.V.			
	nº	Modified	Date	Reason	General Tolerance		Assembly	-
Comments					-	Part name	Solenoid valve ECAS	
					Material	ID. Reference	2309400	
					-	Scale: -		Sheet 1/2
						Review: 0		

PG/18/02 rev.1 1




2


3

4

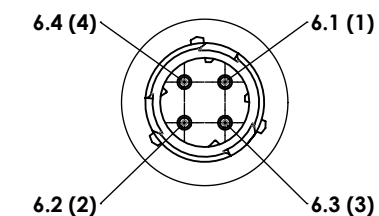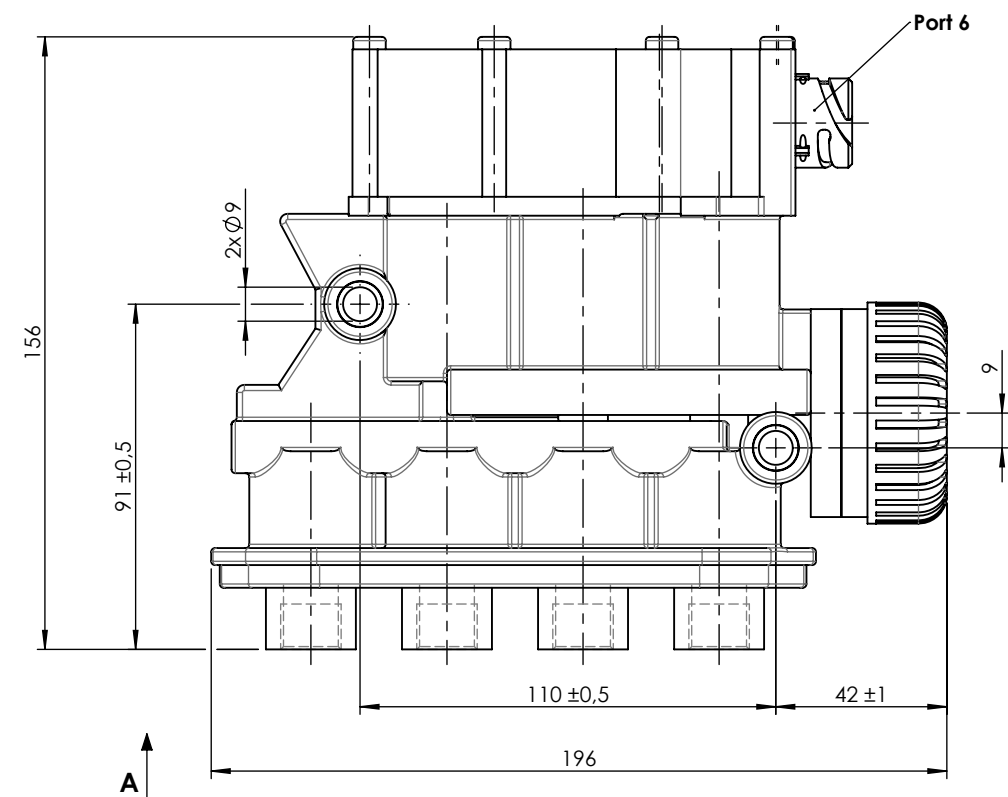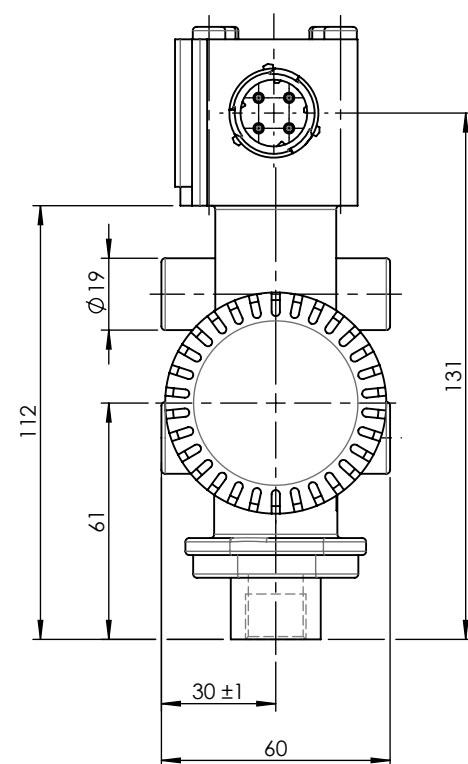

SCALE / ESCALA 2 : 3

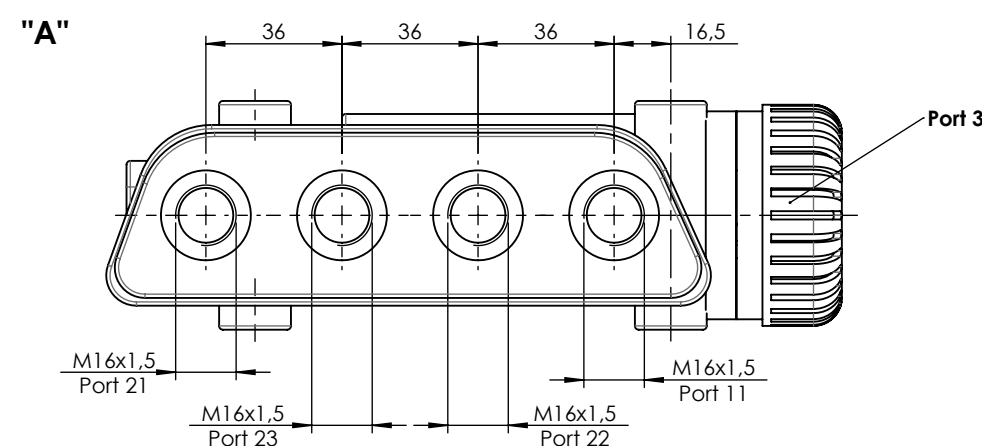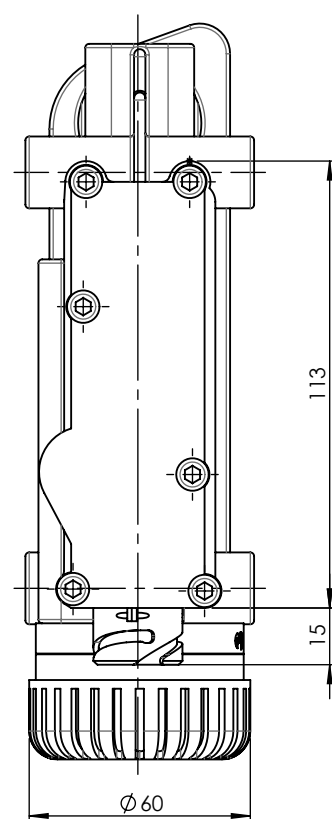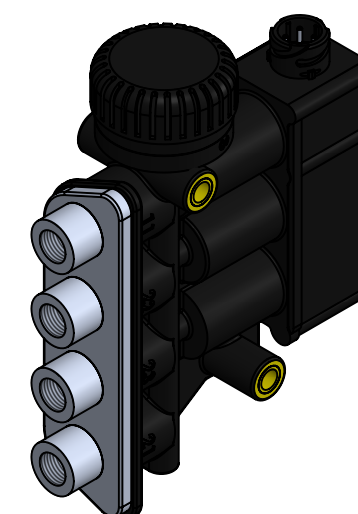

Modification	4				Drawn					
	3				10/12/19 R.A.					
	2				Checked					
	1				10/12/19 O.V.					
	n°	Modified	Date	Reason	General Tolerance	Assembly	-			
Comments					ISO 2768 c-K	Part name	Solenoid valve ECAS			
					Material	ID. Reference	2309400			
					-	Scale: 1/2				Sheet 2/2
						Review: 0				