


1		2		3		4																						
Technical Sheet / Datos Técnicos:																												
Part number adaptable to / Referencia adaptable a:				LA 8204																								
Safety valve pressure / Presión válvula de seguridad:				14.5 bar																								
Unloader / Regulador de presión:				Integrated / Integrado																								
Cut-out pressure / Presión de corte:				10±0.3 bar																								
Heating / Calentador:				-																								
Permissible Medium / Medio de funcionamiento:				Air / Aire																								
Operating temperature range / Rango de temperatura:				- 40°C a / to +80°C																								
Cut-in temperature / Temperatura de cierre:				-																								
Cut-off temperature / Ajuste de la temperatura:				-																								
Weight / Peso:				2295 gr																								
<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>From the compressor / Proveniente del compresor</td> <td>M22x1,5</td> </tr> <tr> <td>21</td> <td>To the reservoirs / A los calderines</td> <td>M22x1,5 VOSS</td> </tr> <tr> <td>22</td> <td>To the regenerated air reservoir / Al calderín de regeneración</td> <td>M16x1,5 VOSS</td> </tr> <tr> <td>4/23</td> <td>Control port / Puerto de control</td> <td>Closed / Taponada</td> </tr> <tr> <td>3</td> <td>Exhaust for compressed air / Escape de aire comprimido</td> <td>-</td> </tr> <tr> <td>6</td> <td>Heating / Calentador</td> <td>-</td> </tr> </tbody> </table>								Port / Conexión	Function / Función	Thread / Rosca	1	From the compressor / Proveniente del compresor	M22x1,5	21	To the reservoirs / A los calderines	M22x1,5 VOSS	22	To the regenerated air reservoir / Al calderín de regeneración	M16x1,5 VOSS	4/23	Control port / Puerto de control	Closed / Taponada	3	Exhaust for compressed air / Escape de aire comprimido	-	6	Heating / Calentador	-
Port / Conexión	Function / Función	Thread / Rosca																										
1	From the compressor / Proveniente del compresor	M22x1,5																										
21	To the reservoirs / A los calderines	M22x1,5 VOSS																										
22	To the regenerated air reservoir / Al calderín de regeneración	M16x1,5 VOSS																										
4/23	Control port / Puerto de control	Closed / Taponada																										
3	Exhaust for compressed air / Escape de aire comprimido	-																										
6	Heating / Calentador	-																										
Purpose / Finalidad: Drying of the compressed air supplied by the compressor. / Secado del aire comprimido procedente del compresor.																												
Installation / Instalación: Exhaust (3) must look down. / El escape de aire (3) debe estar orientado hacia abajo.																												
Modification n°		Modified Date		Reason General Tolerance		Assembly Part name ID. Reference Scale: - Review: 0																						
4 3 2 1		Date Date		Reason Reason		Assembly Part name ID. Reference Scale: - Review: 0																						
Comments		- Material		Air Dryer / Secador de aire 2310604																								
PG/18/02 rev.1 1		2		3		4																						

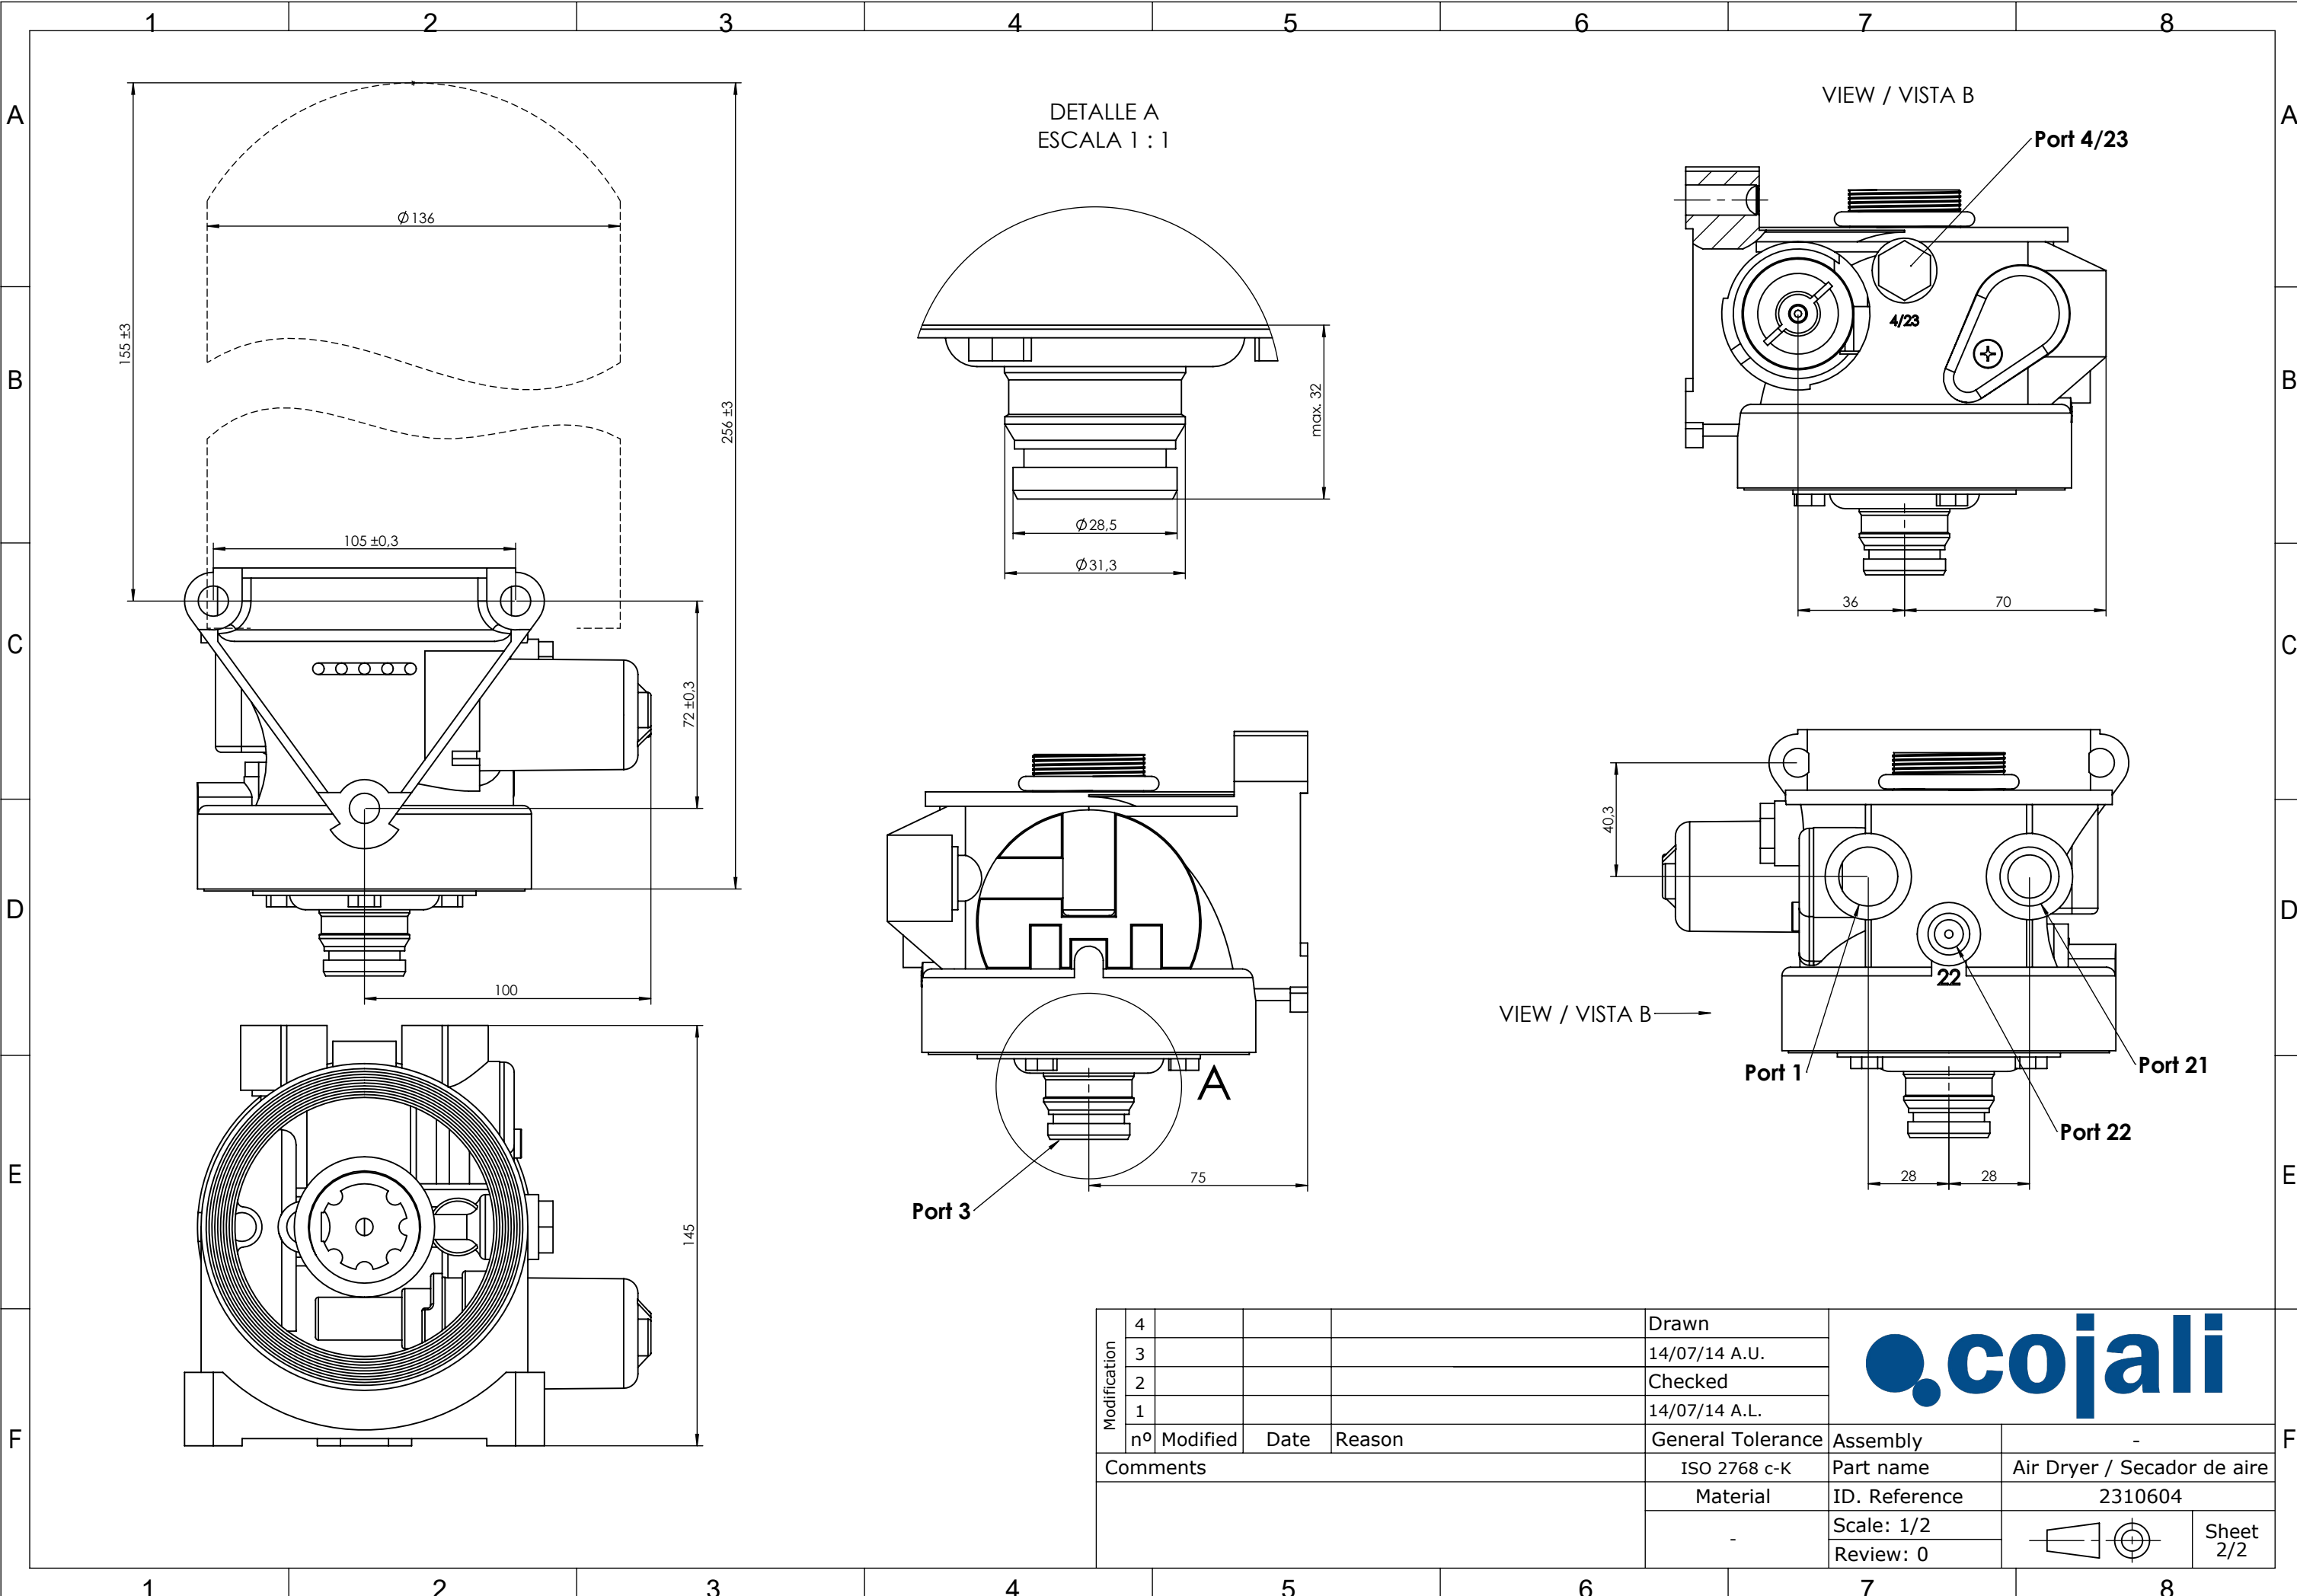

Modification	4				Drawn				
	3				14/07/14 A.U.				
	2				Checked				
	1				14/07/14 A.L.				
	nº	Modified	Date	Reason	General Tolerance	Assembly	-		
Comments					ISO 2768 c-K	Part name	Air Dryer / Secador de aire		
					Material	ID. Reference	2310604		
					-	Scale: 1/2			Sheet 2/2
						Review: 0			