

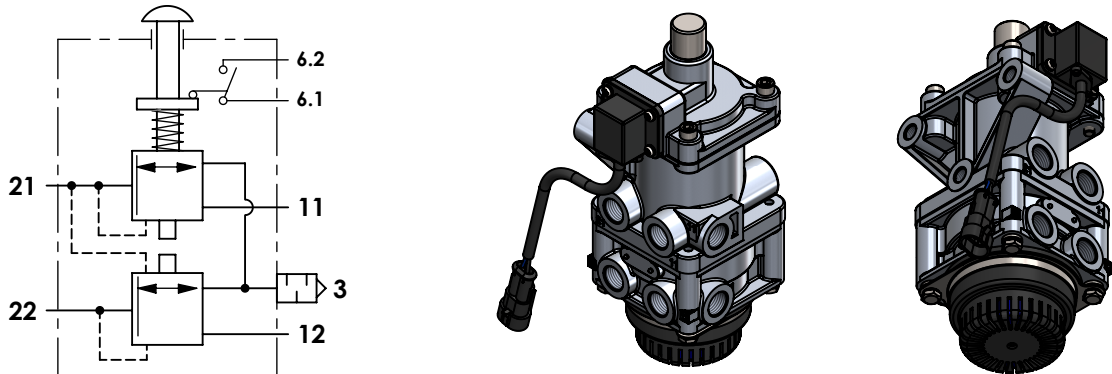





1		2		3		4																																																															
Technical sheet / Datos técnicos:																																																																					
A	Part number adaptable to / Referencia adaptable a					DX75BA																																																															
	Operating pressure / Presión de trabajo					max. 11 bar																																																															
	Predominance / Predominancia					< 0,3 bar																																																															
	Permissible medium / Medio de funcionamiento					Air / Aire																																																															
	Operating temperature range / Rango de temperatura					-40 °C to / a +80 °C																																																															
	Weight / Peso					1850 gr																																																															
B																																																																					
C	<table><tr><th>Port / Conexión</th><th>Function / Función</th><th>Thread / Rosca</th></tr><tr><td>11</td><td>Supply / Alimentación</td><td>2x M16x1,5</td></tr><tr><td>12</td><td>Supply / Alimentación</td><td>2x M16x1,5</td></tr><tr><td>21</td><td>Delivery / Salida</td><td>M16x1,5</td></tr><tr><td>22</td><td>Delivery / Salida</td><td>M16x1,5</td></tr><tr><td>3</td><td>Exhaust / Escape</td><td>Silencer / Silencioso</td></tr><tr><td>6</td><td>Electric connection / Conexión eléctrica</td><td>AMP Superseal 2 pin</td></tr></table>							Port / Conexión	Function / Función	Thread / Rosca	11	Supply / Alimentación	2x M16x1,5	12	Supply / Alimentación	2x M16x1,5	21	Delivery / Salida	M16x1,5	22	Delivery / Salida	M16x1,5	3	Exhaust / Escape	Silencer / Silencioso	6	Electric connection / Conexión eléctrica	AMP Superseal 2 pin																																									
	Port / Conexión	Function / Función	Thread / Rosca																																																																		
	11	Supply / Alimentación	2x M16x1,5																																																																		
	12	Supply / Alimentación	2x M16x1,5																																																																		
	21	Delivery / Salida	M16x1,5																																																																		
	22	Delivery / Salida	M16x1,5																																																																		
	3	Exhaust / Escape	Silencer / Silencioso																																																																		
6	Electric connection / Conexión eléctrica	AMP Superseal 2 pin																																																																			
D	Purpose / Propósito: Application of service brake system through the pedal actuation by the driver. / Aplicación del freno de servicio mediante la actuación del pedal por parte del conductor.																																																																				
	Installation requirements / Requisitos para la instalación: The design of the foot brake valve, acting on seat, must guarantee the maximum way of the push rod that is necessary to control the valve even in case of failure in the circuit I. Mounting is accomplished with three screws M10x1,5. / El diseño de la válvula de freno de pie, accionándolo desde el asiento, debe garantizar el máximo recorrido de la varilla de empuje que resulta necesario para el accionamiento de la válvula, incluso en caso de que falle el circuito I. El montaje se efectúa mediante tres tornillos M10x1,5.																																																																				
E	<table><tr><td rowspan="4">Modification</td><td>4</td><td></td><td></td><td></td><td></td><td>Drawn</td><td rowspan="4"></td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td>30/06/17 J.S.</td></tr><tr><td>2</td><td></td><td></td><td></td><td></td><td>Checked</td></tr><tr><td>1</td><td></td><td></td><td></td><td></td><td>30/06/17 O.V.</td></tr><tr><td rowspan="3">F</td><td>nº</td><td>Modified</td><td>Date</td><td>Reason</td><td>General Tolerance</td><td>Assembly</td><td>-</td></tr><tr><td colspan="4">Comments</td><td>-</td><td>Part name</td><td>Foot brake valve</td></tr><tr><td colspan="4"></td><td>Material</td><td>ID. Reference</td><td>2312302</td></tr><tr><td colspan="4"></td><td>-</td><td>Scale: -</td><td rowspan="2"></td><td rowspan="2">Sheet 1/2</td></tr><tr><td colspan="4"></td><td>-</td><td>Review: 0</td></tr></table>							Modification	4					Drawn		3					30/06/17 J.S.	2					Checked	1					30/06/17 O.V.	F	nº	Modified	Date	Reason	General Tolerance	Assembly	-	Comments				-	Part name	Foot brake valve					Material	ID. Reference	2312302					-	Scale: -		Sheet 1/2					-	Review: 0
	Modification	4					Drawn																																																														
		3					30/06/17 J.S.																																																														
		2					Checked																																																														
		1					30/06/17 O.V.																																																														
	F	nº	Modified	Date	Reason	General Tolerance	Assembly	-																																																													
		Comments				-	Part name	Foot brake valve																																																													
				Material	ID. Reference	2312302																																																															
				-	Scale: -		Sheet 1/2																																																														
				-	Review: 0																																																																
PG/18/02 rev.1 1		2		3		4																																																															

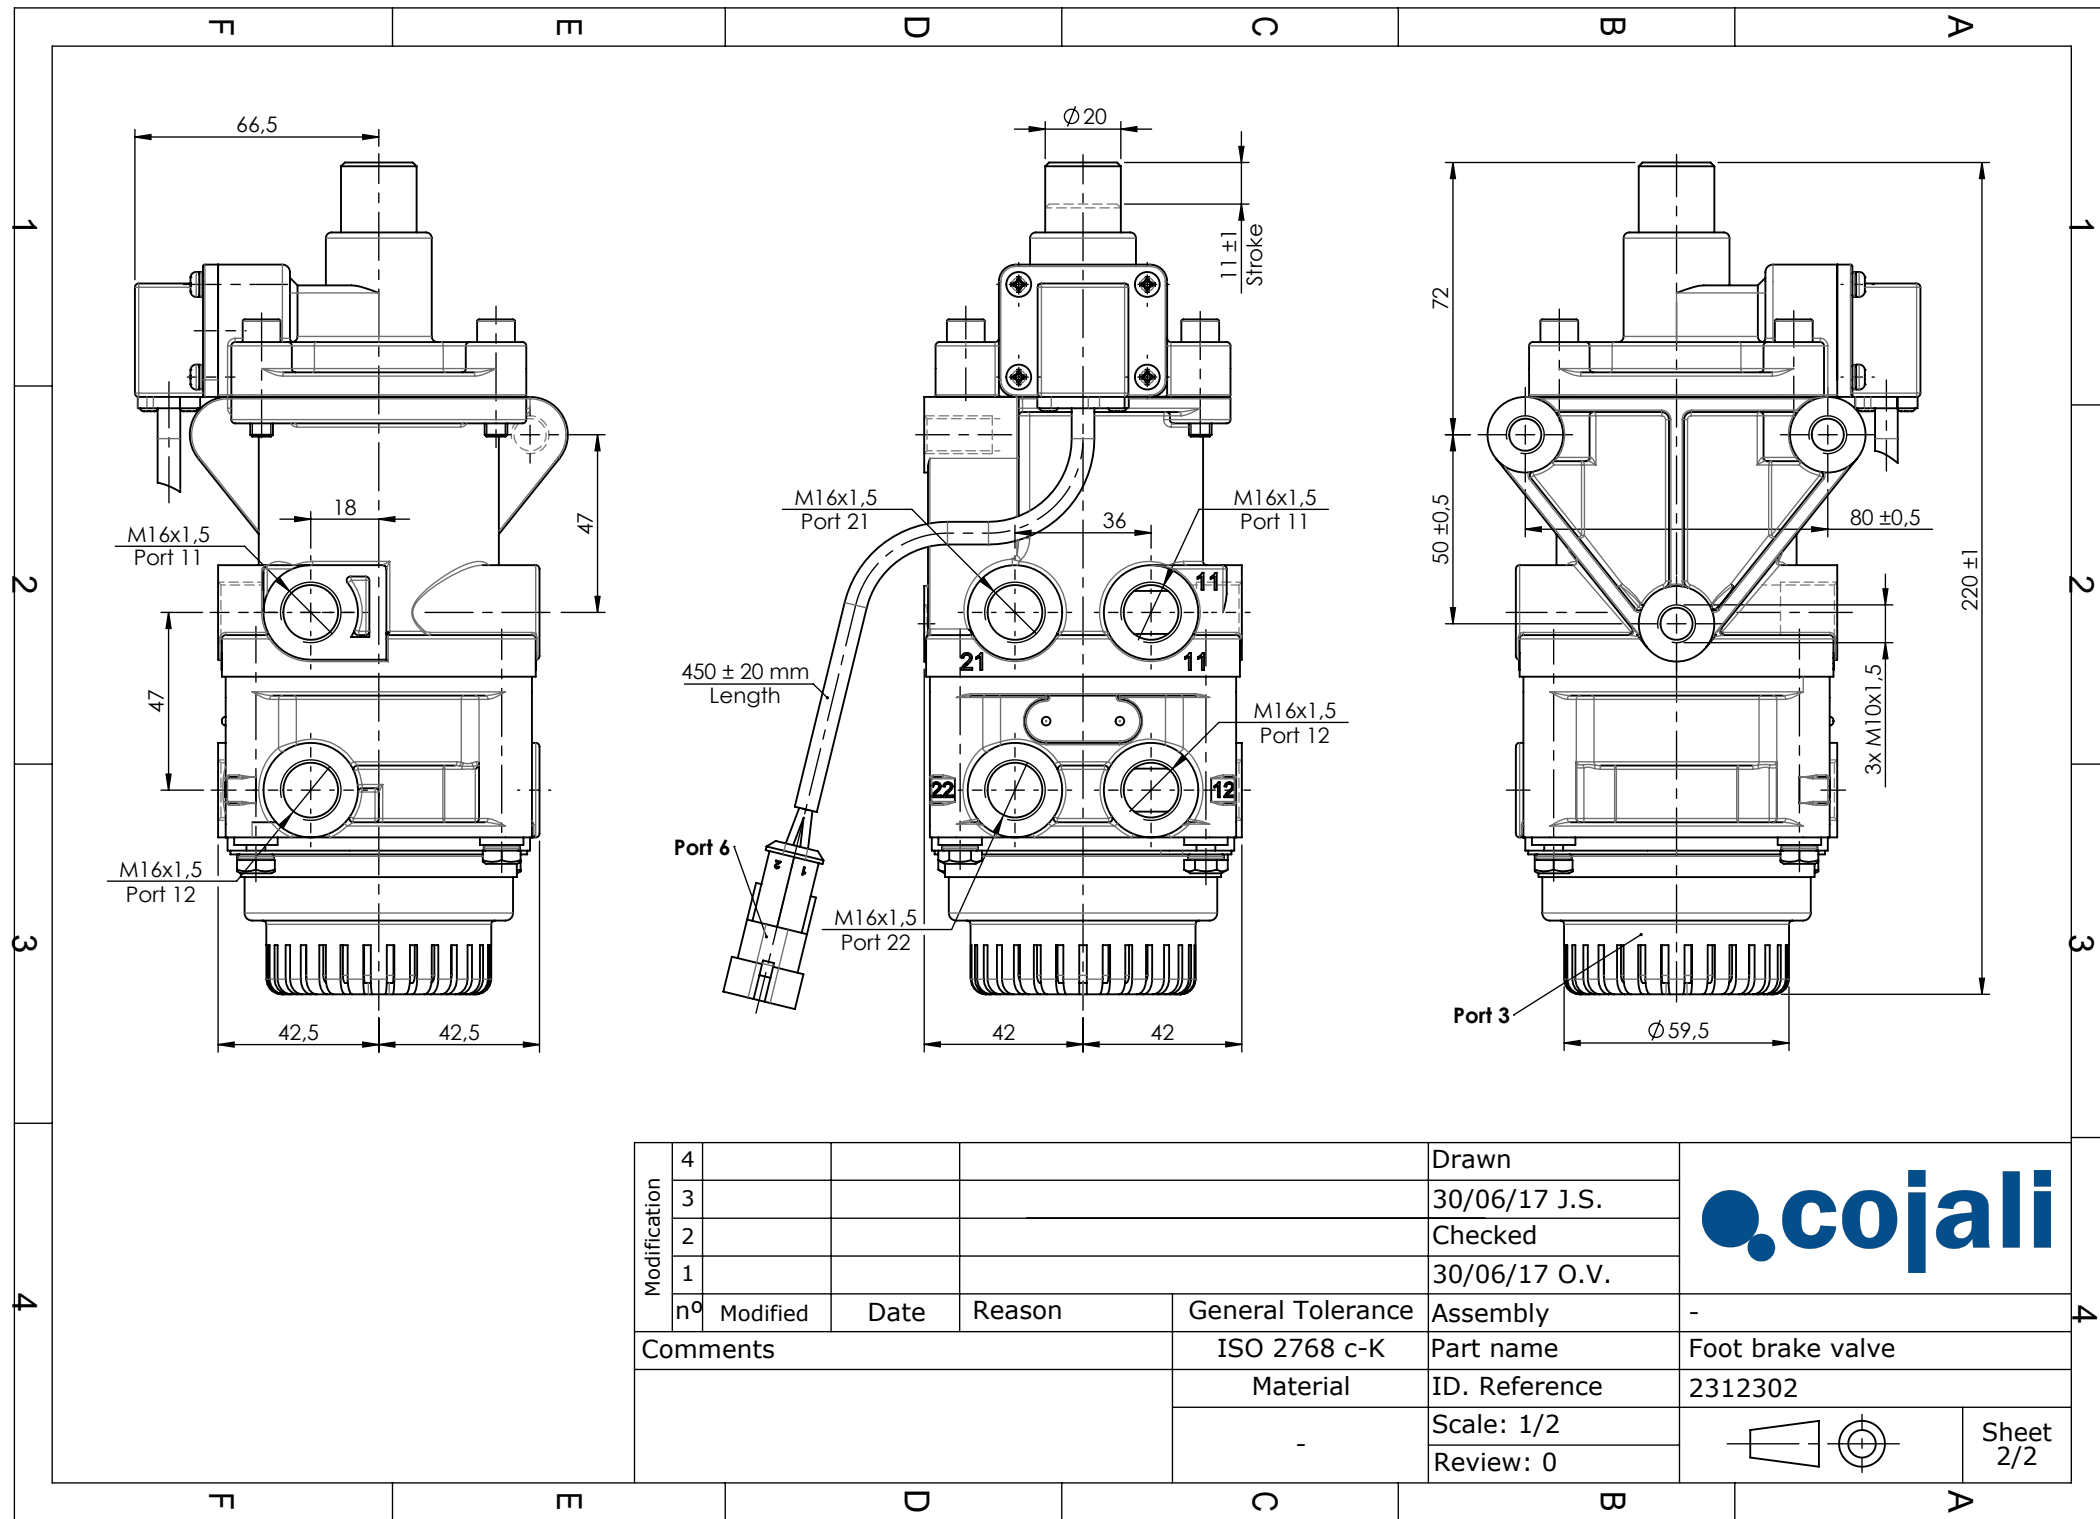

Modification	4				Drawn	
	3				30/06/17 J.S.	
	2				Checked	
	1				30/06/17 O.V.	
	nº	Modified	Date	Reason	General Tolerance	-
Comments					ISO 2768 c-K	Part name
					Material	ID. Reference
					-	Scale: 1/2
					Review: 0	Review: 0



Sheet
2/2