
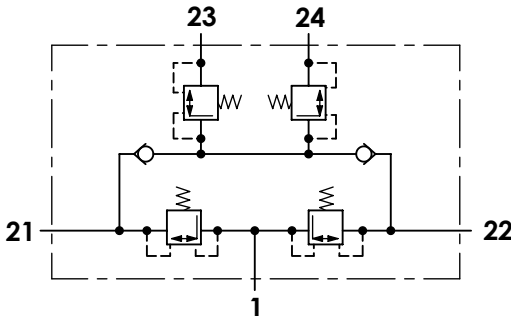


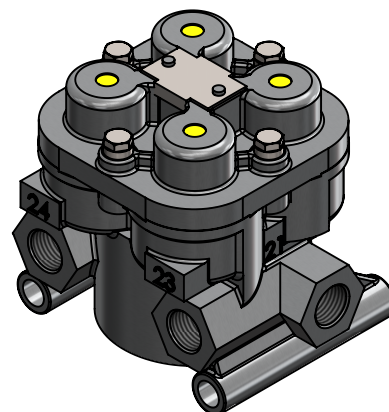
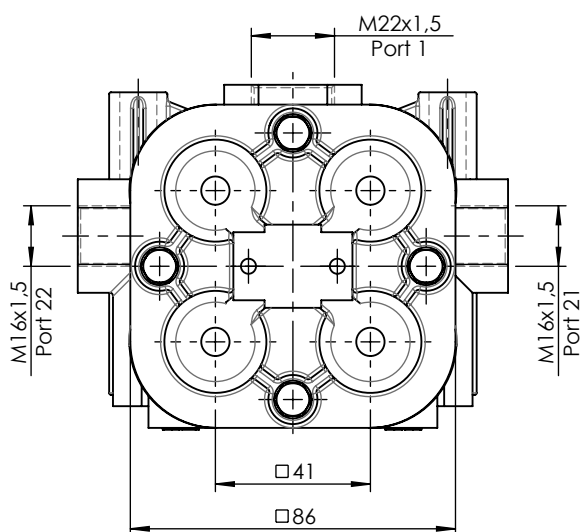
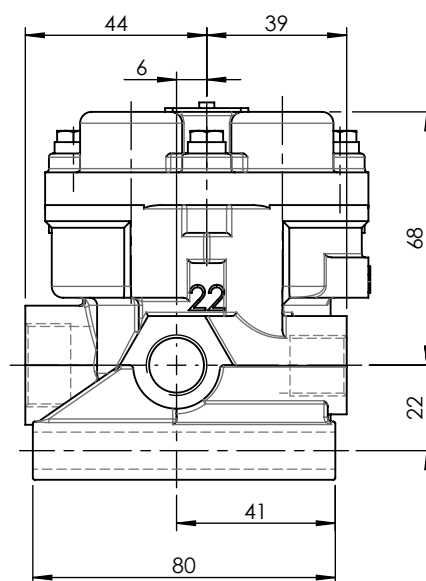
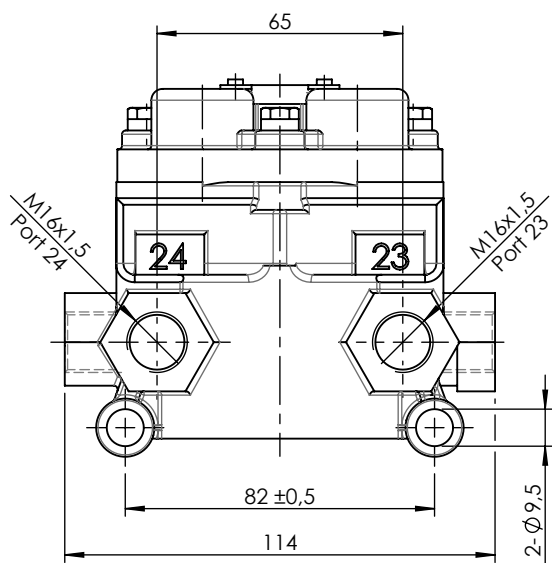


1		2		3		4																															
Technical sheet / Datos técnicos:																																					
A	Part number adaptable to / Referencia adaptable a					0481062309																															
	Operating pressure / Presión de trabajo					max. 20 bar																															
	Permissible medium / Medio de funcionamiento					Air / Aire																															
	Operating temperature range / Rango de temperatura					-40°C to / a +80°C																															
	Weight / Peso					1050 gr																															
B																																					
C	<table><tr><th>Port / Conexión</th><th colspan="2">Function / Función</th><th colspan="2">Thread / Rosca</th></tr><tr><td>1</td><td colspan="2">Supply / Alimentación</td><td colspan="2">M22x1,5</td></tr><tr><td>21</td><td colspan="2">Delivery / Salida</td><td colspan="2">M16x1,5</td></tr><tr><td>22</td><td colspan="2">Delivery / Salida</td><td colspan="2">M16x1,5</td></tr><tr><td>23</td><td colspan="2">Delivery / Salida</td><td colspan="2">M16x1,5</td></tr><tr><td>24</td><td colspan="2">Delivery / Salida</td><td colspan="2">M16x1,5</td></tr></table>							Port / Conexión	Function / Función		Thread / Rosca		1	Supply / Alimentación		M22x1,5		21	Delivery / Salida		M16x1,5		22	Delivery / Salida		M16x1,5		23	Delivery / Salida		M16x1,5		24	Delivery / Salida		M16x1,5	
	Port / Conexión	Function / Función		Thread / Rosca																																	
1	Supply / Alimentación		M22x1,5																																		
21	Delivery / Salida		M16x1,5																																		
22	Delivery / Salida		M16x1,5																																		
23	Delivery / Salida		M16x1,5																																		
24	Delivery / Salida		M16x1,5																																		
D	<table><tr><th>Circuit / Circuito</th><th>1</th><th>2</th><th>3</th><th>4</th></tr><tr><td>Port / Conexión</td><td>21</td><td>22</td><td>23</td><td>24</td></tr><tr><td>Opening pressure / Presión de apertura (bar)</td><td colspan="2">7,0⁰_{-0,3}</td><td colspan="2">6,5⁰_{-0,3}</td></tr><tr><td>Closing pressure dynamic / Presión de cierre dinámica (bar)</td><td colspan="2">≥ 4,5</td><td colspan="2">≥ 4,5</td></tr></table>							Circuit / Circuito	1	2	3	4	Port / Conexión	21	22	23	24	Opening pressure / Presión de apertura (bar)	7,0 ⁰ _{-0,3}		6,5 ⁰ _{-0,3}		Closing pressure dynamic / Presión de cierre dinámica (bar)	≥ 4,5		≥ 4,5											
	Circuit / Circuito	1	2	3	4																																
	Port / Conexión	21	22	23	24																																
	Opening pressure / Presión de apertura (bar)	7,0 ⁰ _{-0,3}		6,5 ⁰ _{-0,3}																																	
	Closing pressure dynamic / Presión de cierre dinámica (bar)	≥ 4,5		≥ 4,5																																	
E	Purpose / Propósito: To distribute clean and dry air from the air dryer to different pneumatic circuits. Ensure pressure in brake circuits in case of leaks or breakage in any circuit. / Distribuir el aire limpio y seco proveniente del secador a los diferentes circuitos neumáticos. Asegurar la presión en los circuitos de freno en caso de fuga o rotura en cualquier circuito.																																				
E	Installation requirements / Requisitos para la instalación: The protection valve may be installed into the piping in any position. Mounting is accomplished by using two screws M8. / La válvula de protección puede instalarse en las tuberías en cualquier posición. El montaje se realiza mediante dos tornillos M8.																																				
F	Modification	4				Drawn		F																													
		3				24/07/20 J.S.																															
		2				Checked																															
		1	J.S.	02/06/21	Change of sheet format	24/07/20 O.V.																															
		nº	Modified	Date	Reason	General Tolerance																															
	Comments					-	Part name		Protection circuit valve																												
						Material	ID. Reference		2322204																												
						-	Scale: -			Sheet 1/2																											
						-	Review: 1																														
						-	Review: 1																														
PG/18/02 rev.1 1		2		3		4																															



F	Modification	4				Drawn		
		3				24/07/20 J.S.		
		2				Checked		
		1	J.S.	02/06/21	Change of sheet format	24/07/20 O.V.		
		nº	Modified	Date	Reason	General Tolerance	Assembly	-
Comments					ISO 2768 c-K	Part name	Protection circuit valve	
					Material	ID. Reference	2322204	
					-	Scale: 1/2		
						Review: 1		
PG/18/02 rev.1 1			2		3		4	