

1

2

3

4

Technical sheet / Datos técnicos:

Part number adaptable to / Referencia adaptable a	0481062317
Operating pressure / Presión de trabajo	max. 20 bar
Permissible medium / Medio de funcionamiento	Air / Aire
Operating temperature range / Rango de temperatura	-40°C to / a +80°C
Weight / Peso	1050 gr

Port / Conexión	Function / Función	Thread / Rosca
1	Supply / Alimentación	M22x1,5
21	Delivery / Salida	M16x1,5
22	Delivery / Salida	M16x1,5
23	Delivery / Salida	M16x1,5
24	Delivery / Salida	M16x1,5

Circuit / Circuito	1	2	3	4
Port / Conexión	21	22	23	24
Opening pressure / Presión de apertura (bar)	8,0 ⁰ _{-0,3}		8,3 ⁰ _{-0,2}	8,0 ⁰ _{-0,3}
Closing pressure dynamic / Presión de cierre dinámica (bar)	≥ 5,5		≥ 5,5	

Purpose / Propósito:

To distribute clean and dry air from the air dryer to different pneumatic circuits. Ensure pressure in brake circuits in case of leaks or breakage in any circuit. / Distribuir el aire limpio y seco proveniente del secador a los diferentes circuitos neumáticos. Asegurar la presión en los circuitos de freno en caso de fuga o rotura en cualquier circuito.

Installation requirements / Requisitos para la instalación:

The protection valve may be installed into the piping in any position. Mounting is accomplished by using two screws M8. / La válvula de protección puede instalarse en las tuberías en cualquier posición. El montaje se realiza mediante dos tornillos M8.

Modification	4				Drawn	
	3				24/07/20 J.S.	
	2				Checked	
	1	J.S.	02/06/21	Change of sheet format	24/07/20 O.V.	
	nº	Modified	Date	Reason	Assembly	
Comments					Part name	Protection circuit valve
					Material	ID. Reference
					Scale: -	
					Review: 1	





PG/18/02 rev.1 1


2

3

4

Sheet 1/2

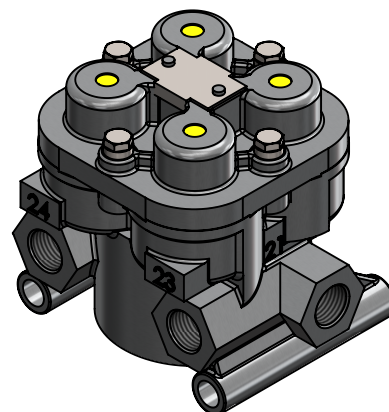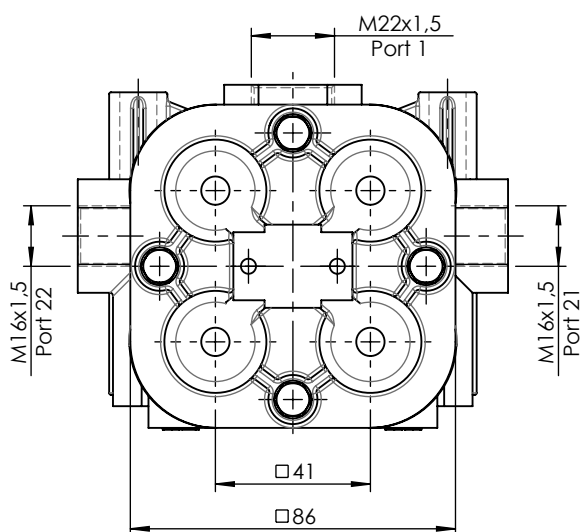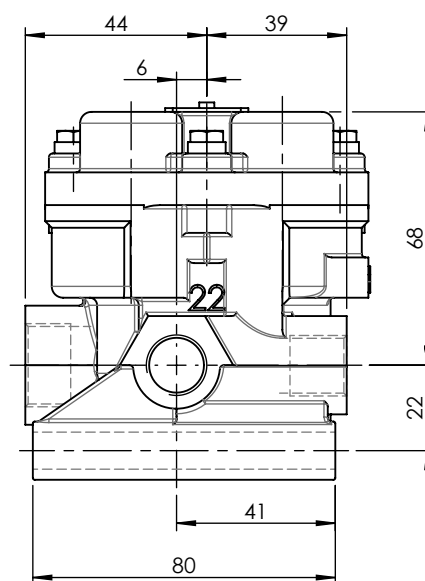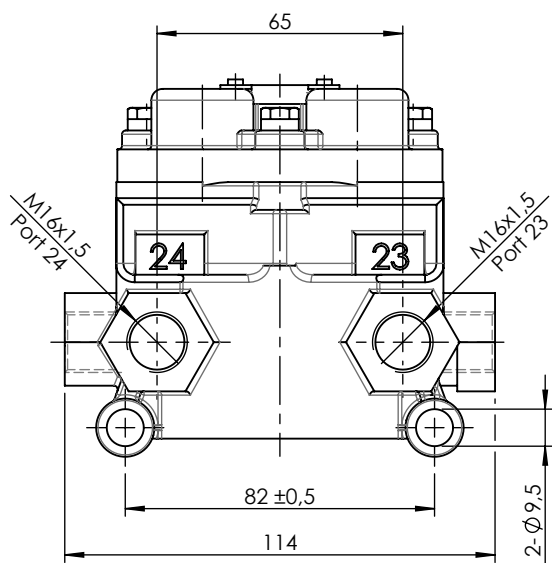

F	Modification	4				Drawn		F
		3				24/07/20 J.S.		
		2				Checked		
		1	J.S.	02/06/21	Change of sheet format	24/07/20 O.V.		
		n°	Modified	Date	Reason	General Tolerance		
Comments				ISO 2768 c-K	Part name	Protection circuit valve		
				Material	ID. Reference	2322205		
				-	Scale: 1/2			Sheet 2/2
					Review: 1			
PG/18/02 rev.1 1			2		3		4	