
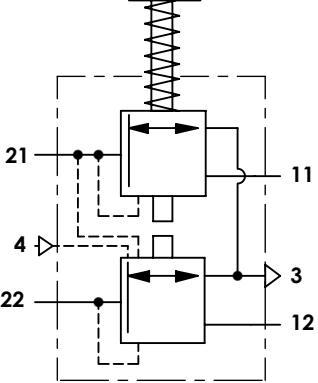
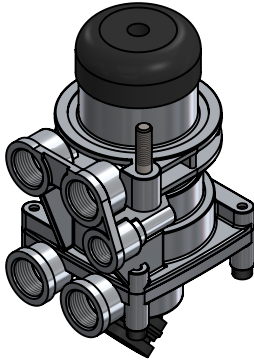

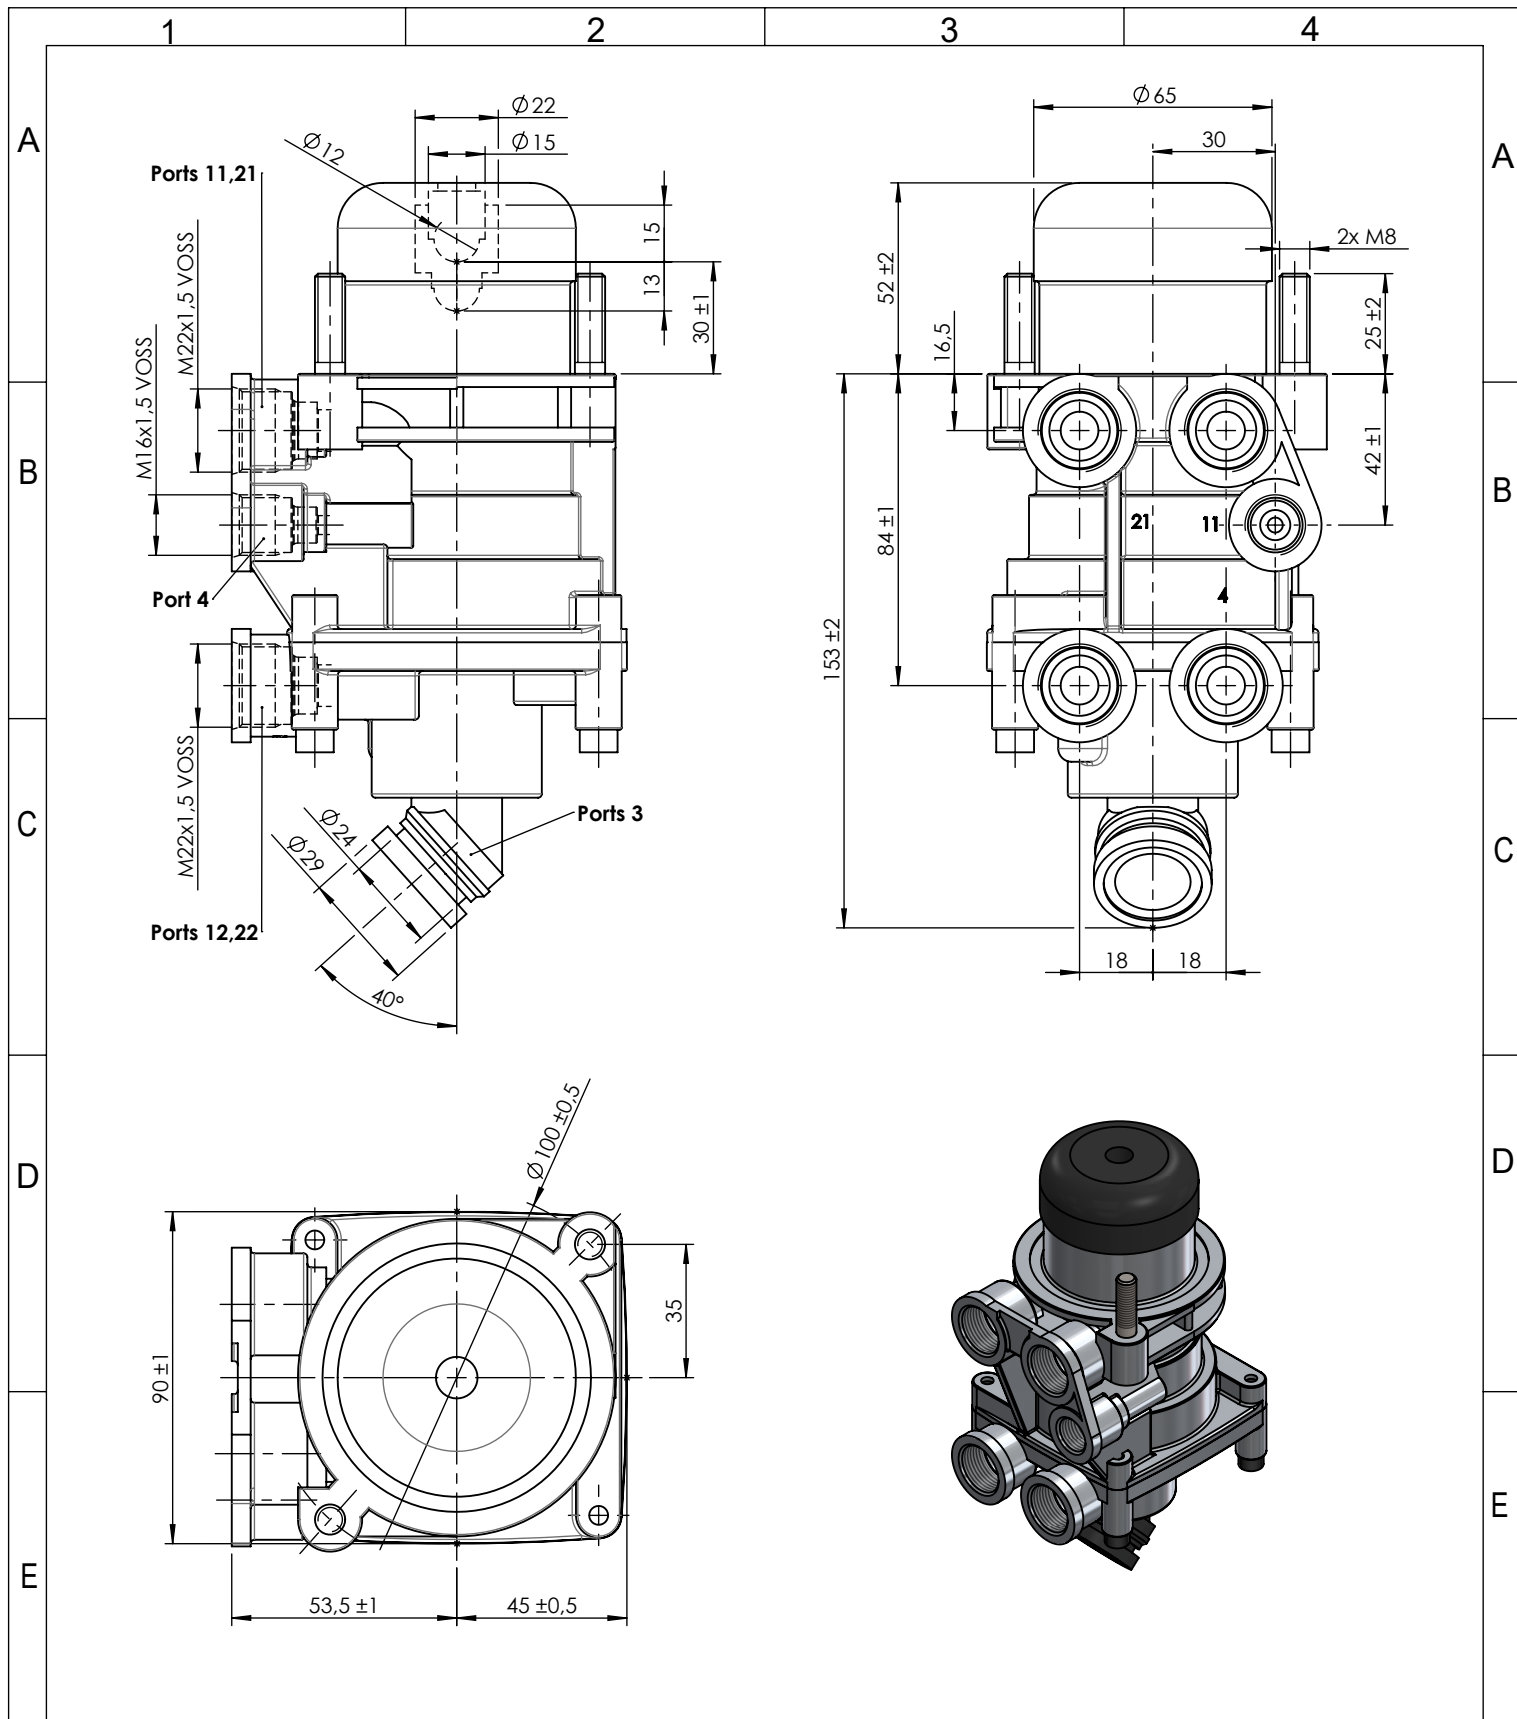


1		2		3		4																															
A	Technical sheet / Datos técnicos:							A																													
B	Part number adaptable to / Referencia adaptable a					320063122		B																													
	Operating pressure / Presión de trabajo					max. 10 bar																															
	Predominance / Predominancia					≤ 0,2 bar																															
	Permissible medium / Medio de funcionamiento					Air / Aire																															
	Operating temperature range / Rango de temperatura					-40°C to / a +80°C																															
C	Weight / Peso					1400 gr		C																													
 																																					
D	<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>11</td> <td>Supply / Alimentación</td> <td>M22x1,5 VOSS</td> </tr> <tr> <td>12</td> <td>Supply / Alimentación</td> <td>M22x1,5 VOSS</td> </tr> <tr> <td>4</td> <td>Control / Pilotaje</td> <td>M16x1,5 VOSS</td> </tr> <tr> <td>21</td> <td>Delivery / Salida</td> <td>M22x1,5 VOSS</td> </tr> <tr> <td>22</td> <td>Delivery / Salida</td> <td>M22x1,5 VOSS</td> </tr> <tr> <td>3</td> <td>Exhaust / Escape</td> <td>-</td> </tr> </tbody> </table>							Port / Conexión	Function / Función	Thread / Rosca	11	Supply / Alimentación	M22x1,5 VOSS	12	Supply / Alimentación	M22x1,5 VOSS	4	Control / Pilotaje	M16x1,5 VOSS	21	Delivery / Salida	M22x1,5 VOSS	22	Delivery / Salida	M22x1,5 VOSS	3	Exhaust / Escape	-	D								
	Port / Conexión	Function / Función	Thread / Rosca																																		
	11	Supply / Alimentación	M22x1,5 VOSS																																		
	12	Supply / Alimentación	M22x1,5 VOSS																																		
	4	Control / Pilotaje	M16x1,5 VOSS																																		
	21	Delivery / Salida	M22x1,5 VOSS																																		
	22	Delivery / Salida	M22x1,5 VOSS																																		
3	Exhaust / Escape	-																																			
Purpose / Propósito: Application of service brake system through the pedal actuation by the driver. / Aplicación del freno de servicio mediante la actuación del pedal por parte del conductor.																																					
E	Installation requirements / Requisitos para la instalación: The design of the foot brake valve, acting on seat, must guarantee the maximum way of the push rod that is necessary to control the valve even in case of failure in the circuit I. Mounting is accomplished with two M8 mounting bolts. / El diseño de la válvula de freno de pie, accionándolo desde el asiento, debe garantizar el máximo recorrido de la varilla de empuje que resulta necesario para el accionamiento de la válvula, incluso en caso de que falle el circuito I. El montaje se efectúa con dos pernos de montaje M8.							E																													
F	<table border="1"> <thead> <tr> <th>Modification nº</th> <th>Modified</th> <th>Date</th> <th>Reason</th> </tr> </thead> <tbody> <tr> <td>4</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> </tr> <tr> <td>1</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>				Modification nº	Modified	Date	Reason	4				3				2				1				<table border="1"> <tbody> <tr> <td>Drawn</td> <td></td> </tr> <tr> <td>14/01/14 L.S.</td> <td></td> </tr> <tr> <td>Checked</td> <td></td> </tr> <tr> <td>14/01/14 A.L.</td> <td></td> </tr> </tbody> </table>		Drawn		14/01/14 L.S.		Checked		14/01/14 A.L.				F
	Modification nº	Modified	Date	Reason																																	
	4																																				
	3																																				
	2																																				
	1																																				
	Drawn																																				
14/01/14 L.S.																																					
Checked																																					
14/01/14 A.L.																																					
<table border="1"> <thead> <tr> <th>General Tolerance</th> <th>Assembly</th> </tr> </thead> <tbody> <tr> <td>-</td> <td>-</td> </tr> </tbody> </table>				General Tolerance	Assembly	-	-																														
General Tolerance	Assembly																																				
-	-																																				
Comments				Part name		Foot brake valve																															
				Material		2412105																															
				Scale: -																																	
				Review: 0																																	
PG/18/02 rev.1 1 2 3 4																																					



F	Modification	4				Drawn			F
		3				14/01/14 L.S.			
		2				Checked			
		1				14/01/14 A.L.			
		nº	Modified	Date	Reason	General Tolerance			
	Comments					ISO 2768 c-K	Part name	Foot brake valve	
					Material	ID. Reference	2412105		
					-	Scale: 1/2			Sheet 2/2
						Review: 0			
PG/18/02 rev.1 1			2		3		4		