
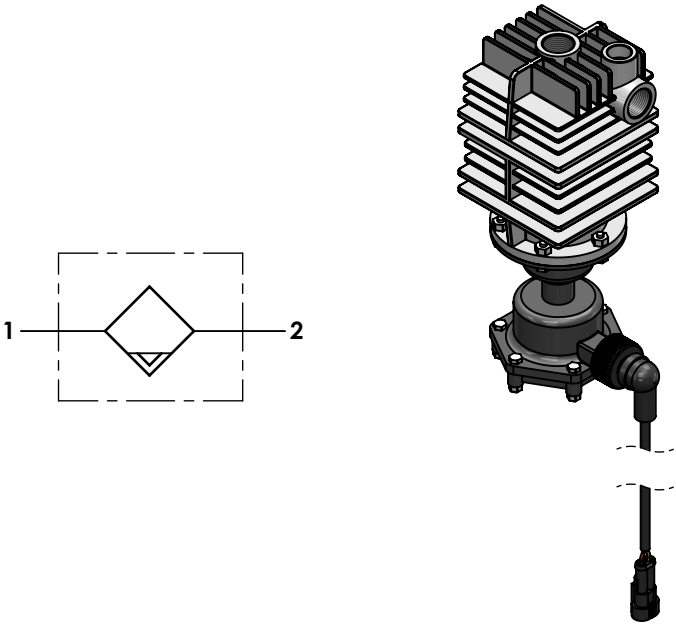

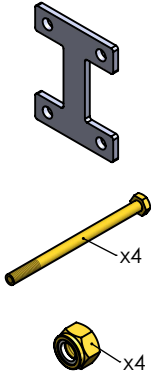



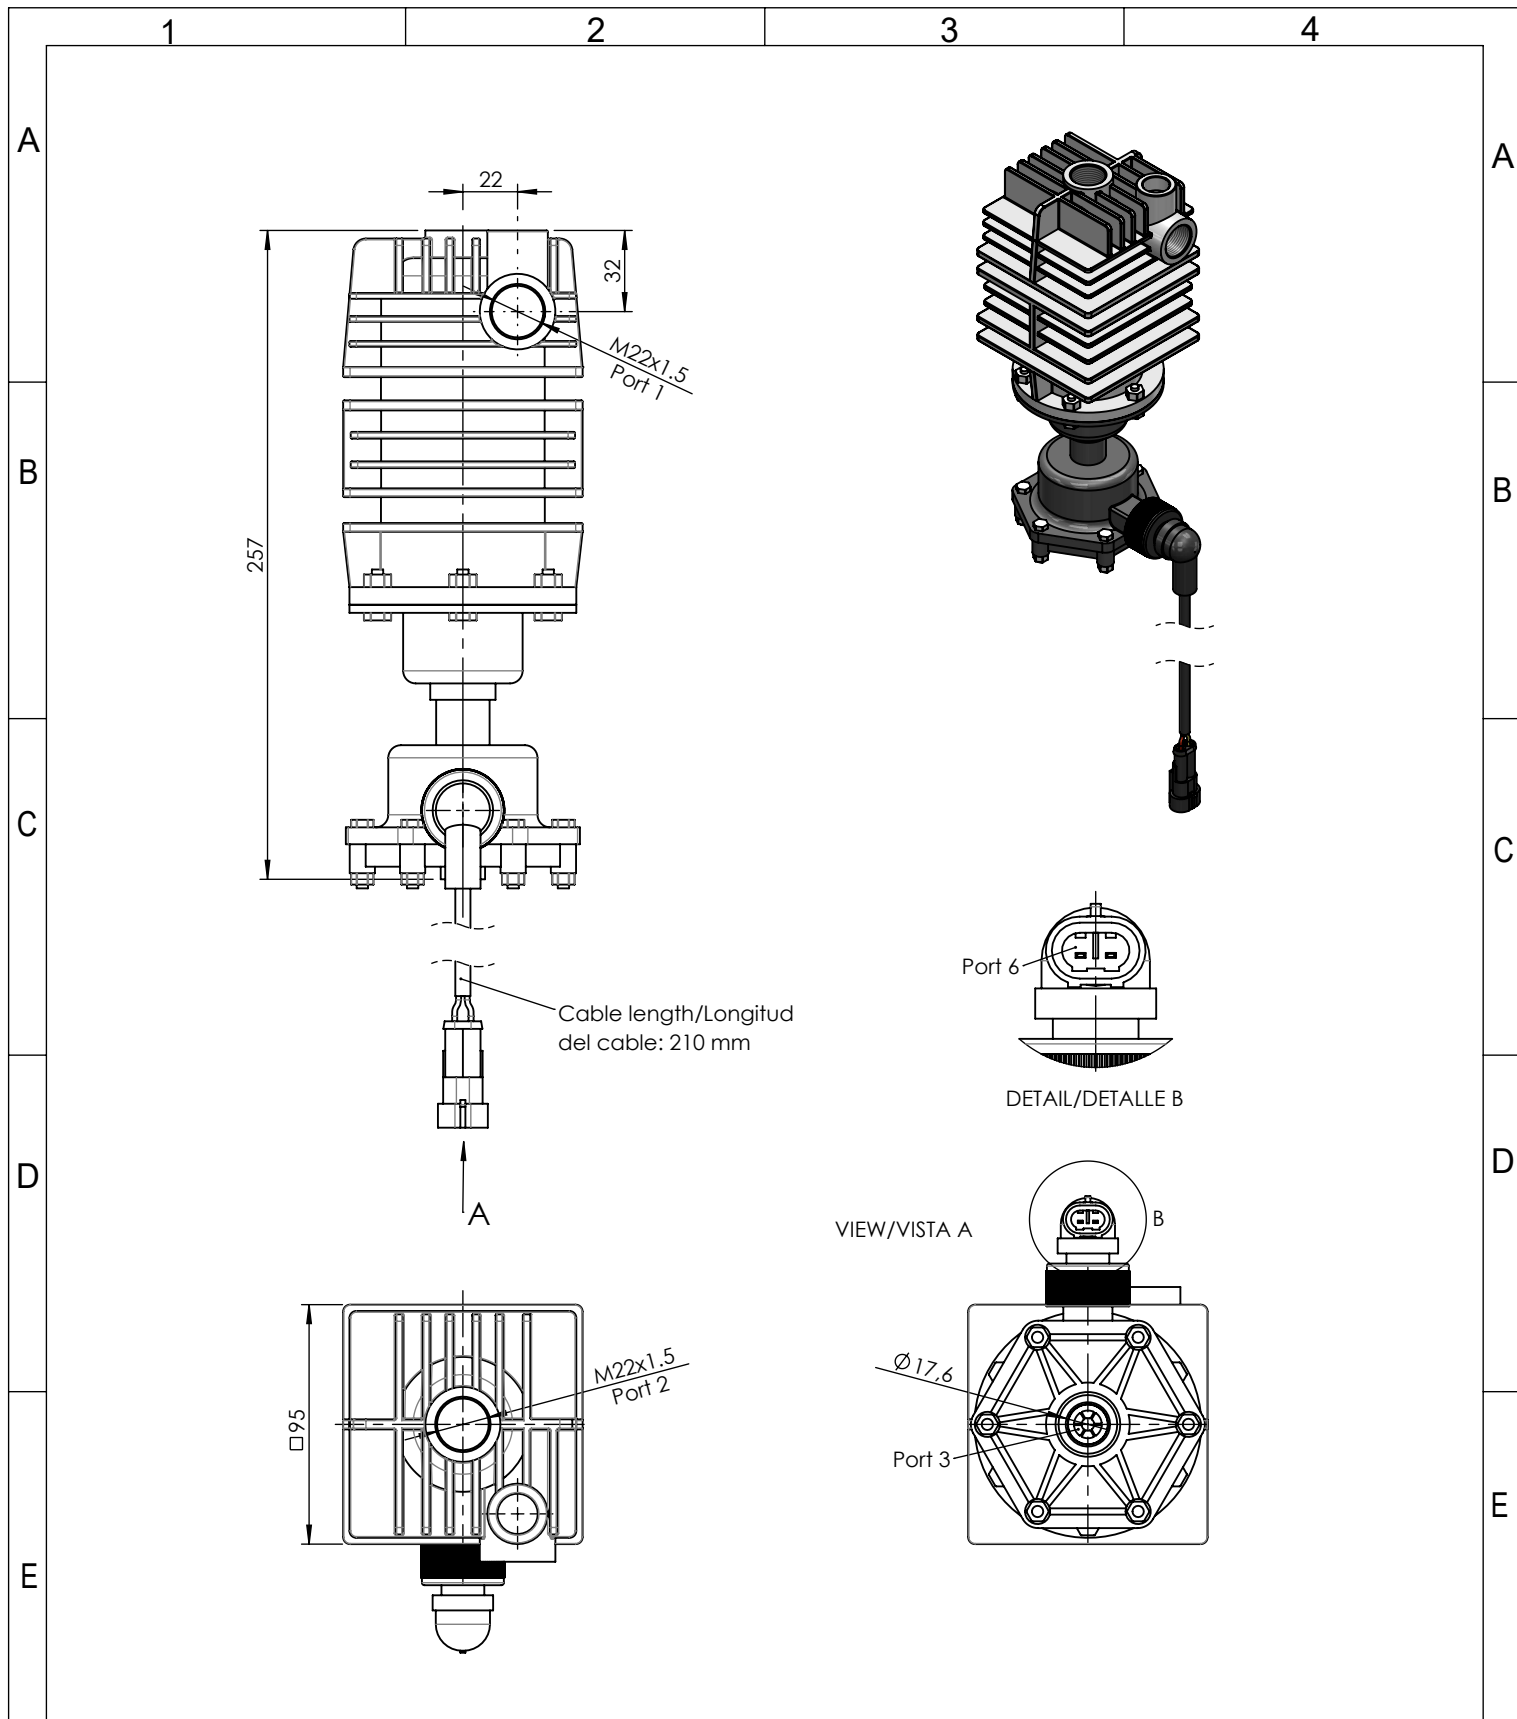


1		2		3		4																																																							
A	Technical sheet / Datos técnicos:						A																																																						
	Part number adaptable to / Referencia adaptable a					71360																																																							
	Voltage / Tensión					24V																																																							
	Current / Intensidad					0.5A																																																							
	Permissible medium / Medio de funcionamiento					Air / Aire																																																							
	Operating temperature range / Rango de temperatura					-40 °C to / a +80 °C																																																							
B	Weight / Peso					2200 gr	B																																																						
																																																													
C	 Parts included / Piezas incluidas 						C																																																						
D	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;">Port / Conexión</th> <th style="width: 55%;">Function / Función</th> <th style="width: 30%;">Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td>Supply / Alimentación</td> <td>M22x1.5</td> </tr> <tr> <td style="text-align: center;">2</td> <td>Delivery / Salida</td> <td>M22x1.5</td> </tr> <tr> <td style="text-align: center;">3</td> <td>Exhaust / Escape</td> <td style="text-align: center;">-</td> </tr> <tr> <td style="text-align: center;">6</td> <td>Connector / Conector</td> <td>2 pin connector / Conector de 2 pines</td> </tr> </tbody> </table>							Port / Conexión	Function / Función	Thread / Rosca	1	Supply / Alimentación	M22x1.5	2	Delivery / Salida	M22x1.5	3	Exhaust / Escape	-	6	Connector / Conector	2 pin connector / Conector de 2 pines	D																																						
	Port / Conexión	Function / Función	Thread / Rosca																																																										
	1	Supply / Alimentación	M22x1.5																																																										
	2	Delivery / Salida	M22x1.5																																																										
	3	Exhaust / Escape	-																																																										
	6	Connector / Conector	2 pin connector / Conector de 2 pines																																																										
E	Purpose / Propósito: Eliminating oil particles, liquids and other contaminants that can arrive through the compressor in order to avoid they reach the air system. / Eliminar partículas de aceite, líquidos y otros contaminantes que pueden llegar a través del compresor con el fin de evitar que estos alcancen el sistema de aire.							E																																																					
F	Installation requirements / Requisitos para la instalación: The air condenser is installed between compressor and air dryer. / El condensador de aire se instala entre el compresor y el secador de aire.							F																																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 5%;">Modification</th> <th style="width: 5%;">nº</th> <th style="width: 15%;">Modified</th> <th style="width: 15%;">Date</th> <th style="width: 15%;">Reason</th> <th style="width: 15%;">General Tolerance</th> <th style="width: 15%;">Assembly</th> <th style="width: 20%;">-</th> </tr> </thead> <tbody> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>Drawn</td> <td rowspan="4" style="text-align: center; vertical-align: middle;">  </td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>28/07/20 S.F.</td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>Checked</td> </tr> <tr> <td>1</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>28/07/20 O.V.</td> </tr> <tr> <td colspan="5" rowspan="4">Comments</td> <td style="text-align: center;">-</td> <td>Part name</td> <td>Air condenser</td> </tr> <tr> <td style="text-align: center;">Material</td> <td>ID. Reference</td> <td>2480001</td> </tr> <tr> <td style="text-align: center;">-</td> <td>Scale: -</td> <td rowspan="2" style="text-align: center;">  </td> <td rowspan="2" style="text-align: center;">Sheet 1/2</td> </tr> <tr> <td></td> <td>Review: 0</td> </tr> </tbody> </table>							Modification	nº	Modified	Date	Reason	General Tolerance	Assembly	-	4						Drawn		3						28/07/20 S.F.	2						Checked	1						28/07/20 O.V.	Comments					-	Part name	Air condenser	Material	ID. Reference	2480001	-	Scale: -		Sheet 1/2		Review: 0	F
Modification	nº	Modified	Date	Reason	General Tolerance	Assembly	-																																																						
4						Drawn																																																							
3						28/07/20 S.F.																																																							
2						Checked																																																							
1						28/07/20 O.V.																																																							
Comments					-	Part name	Air condenser																																																						
					Material	ID. Reference	2480001																																																						
					-	Scale: -		Sheet 1/2																																																					
						Review: 0																																																							
PG/18/02 rev.1 1		2		3		4																																																							



F	Modification	4				Drawn			F
		3				28/07/20 S.F.			
		2				Checked			
		1				28/07/20 O.V.			
		nº	Modified	Date	Reason	General Tolerance			
	Comments				ISO 2768 c-K	Part name	Air condenser		
				Material	ID. Reference	2480001			
				-	Scale: 1/3		Sheet 2/2		
					Review: 0				
PG/18/02 rev.1 1			2		3		4		