
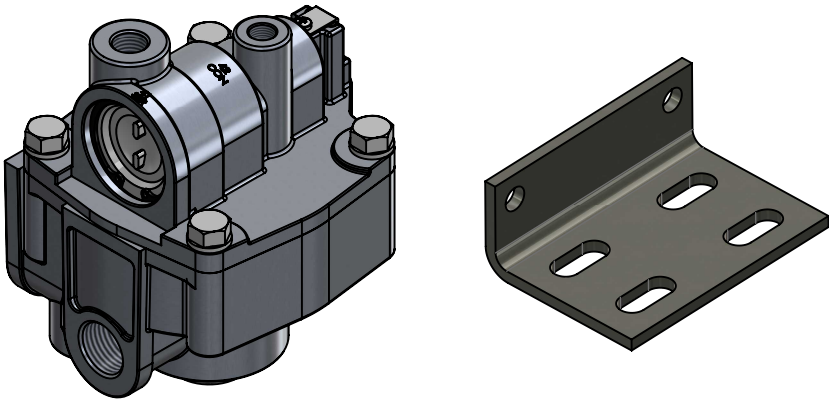





	1	2	3	4																																																																			
A	Technical sheet / Datos técnicos:																																																																						
B	Part number adaptable to / Referencia adaptable a		065145																																																																				
	Operating pressure / Presión de trabajo		max. 9 bar																																																																				
	Predominance / Predominancia		-																																																																				
	Permissible medium / Medio de funcionamiento		Air / Aire																																																																				
	Operating temperature range / Rango de temperatura		-40°C to / a +80°C																																																																				
	Weight / Peso		1500 gr																																																																				
C	<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>SUPPLY</td> <td>Supply / Alimentación</td> <td>2x 1/2"</td> </tr> <tr> <td>DELIVERY</td> <td>Delivery / Salida</td> <td>2x 1/2" & 2x 3/8"</td> </tr> <tr> <td>SERVICE</td> <td>Service / Servicio</td> <td>1/4"</td> </tr> <tr> <td>CONTROL</td> <td>Control / Pilotaje</td> <td>1/8"</td> </tr> <tr> <td>EXH</td> <td>Exhaust / Escape</td> <td>-</td> </tr> </tbody> </table>		Port / Conexión	Function / Función	Thread / Rosca	SUPPLY	Supply / Alimentación	2x 1/2"	DELIVERY	Delivery / Salida	2x 1/2" & 2x 3/8"	SERVICE	Service / Servicio	1/4"	CONTROL	Control / Pilotaje	1/8"	EXH	Exhaust / Escape	-																																																			
	Port / Conexión	Function / Función	Thread / Rosca																																																																				
	SUPPLY	Supply / Alimentación	2x 1/2"																																																																				
	DELIVERY	Delivery / Salida	2x 1/2" & 2x 3/8"																																																																				
	SERVICE	Service / Servicio	1/4"																																																																				
	CONTROL	Control / Pilotaje	1/8"																																																																				
EXH	Exhaust / Escape	-																																																																					
D																																																																							
E	Purpose / Propósito: To rapidly supply and evacuate compressed air from pneumatic equipment and to reduce response times in pneumatic braking systems. / Suministrar y evacuar rápidamente aire comprimido de equipos neumáticos y reducir el tiempo de respuesta de estos equipos.																																																																						
	Installation requirements / Requisitos para la instalación: The valve must be installed with exhaust pointing downwards. / La válvula debe montarse con el escape apuntando hacia abajo.																																																																						
F	<table border="1"> <tr> <td rowspan="5">Modification nº</td> <td>4</td> <td></td> <td></td> <td></td> <td>Drawn</td> <td rowspan="5">  </td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td>23/11/20 J.S.</td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td>Checked</td> </tr> <tr> <td>1</td> <td></td> <td></td> <td></td> <td>23/11/20 O.V.</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>nº</td> <td>Modified</td> <td>Date</td> <td>Reason</td> <td>General Tolerance</td> <td>Assembly</td> <td>-</td> </tr> <tr> <td colspan="5">Comments</td> <td>-</td> <td>Part name</td> <td>Relay valve</td> </tr> <tr> <td colspan="5"></td> <td>Material</td> <td>ID. Reference</td> <td>2991085</td> </tr> <tr> <td colspan="5"></td> <td>-</td> <td>Scale: -</td> <td rowspan="2">  </td> </tr> <tr> <td colspan="5"></td> <td>-</td> <td>Review: 0</td> <td>Sheet 1/2</td> </tr> </table>				Modification nº	4				Drawn		3				23/11/20 J.S.	2				Checked	1				23/11/20 O.V.							nº	Modified	Date	Reason	General Tolerance	Assembly	-	Comments					-	Part name	Relay valve						Material	ID. Reference	2991085						-	Scale: -							-	Review: 0	Sheet 1/2
Modification nº	4					Drawn																																																																	
	3					23/11/20 J.S.																																																																	
	2					Checked																																																																	
	1					23/11/20 O.V.																																																																	
	nº	Modified	Date	Reason	General Tolerance	Assembly	-																																																																
Comments					-	Part name	Relay valve																																																																
					Material	ID. Reference	2991085																																																																
					-	Scale: -																																																																	
					-	Review: 0		Sheet 1/2																																																															
	PG/18/02 rev.1 1	2	3	4																																																																			

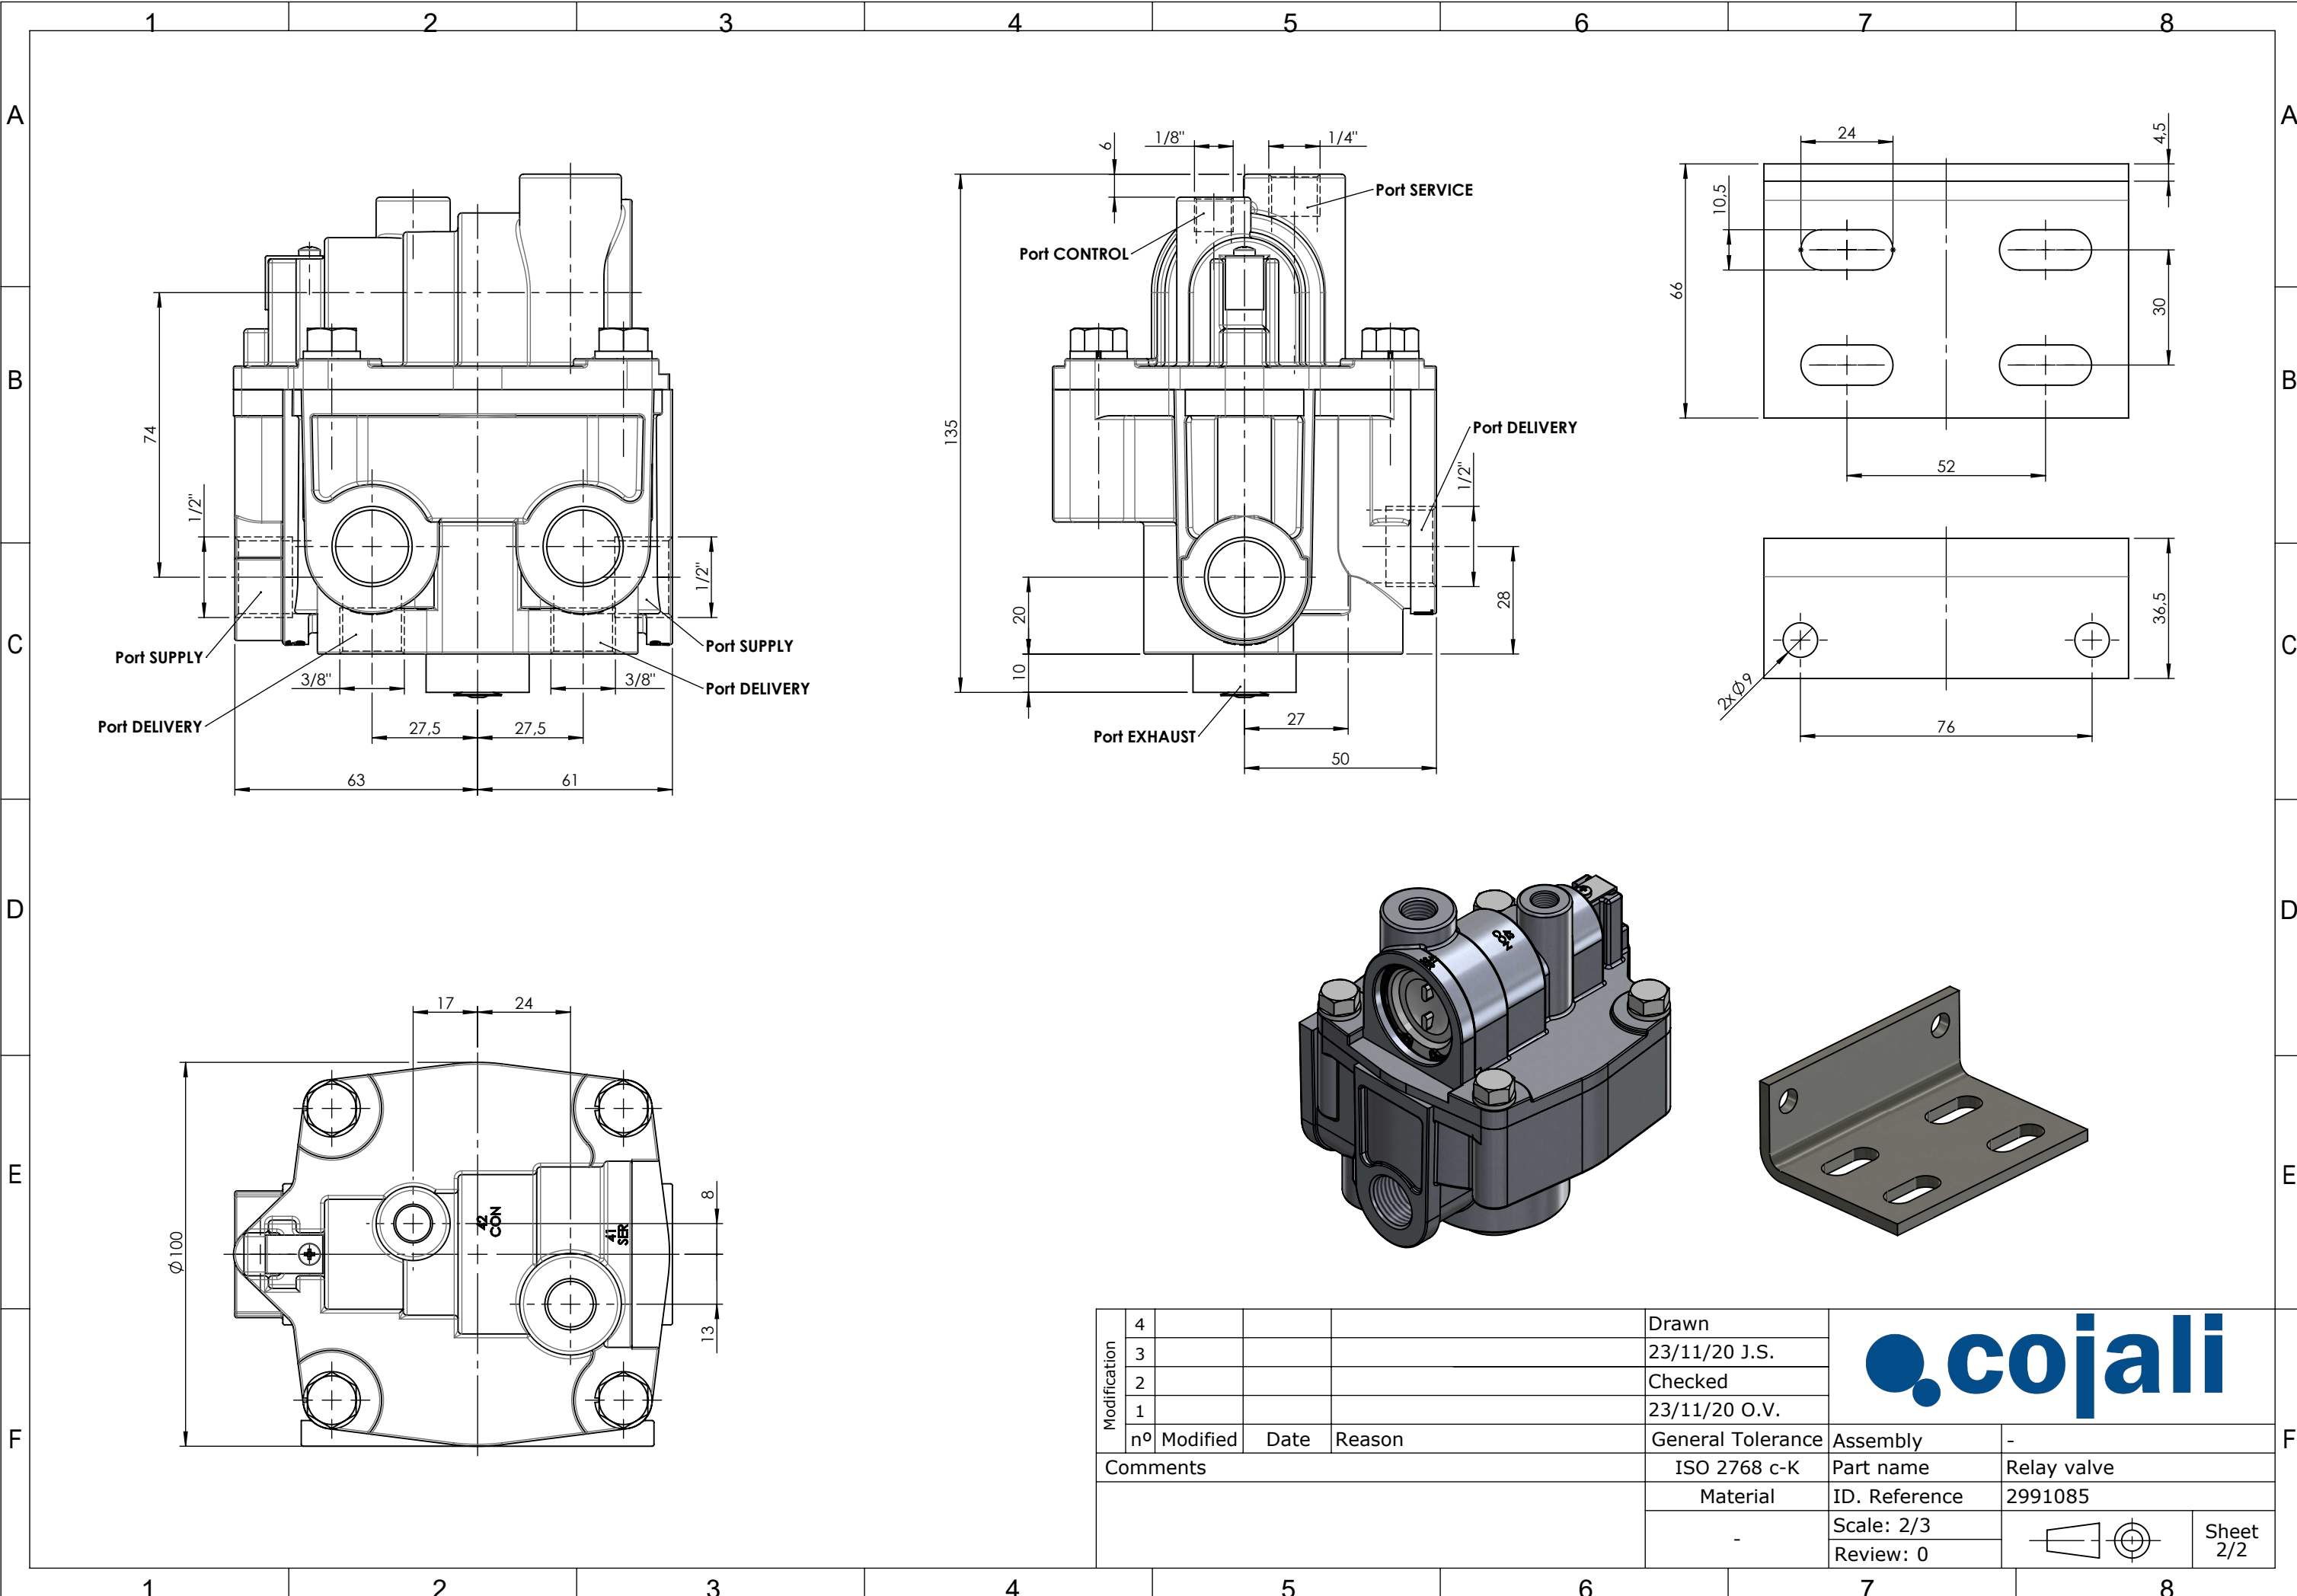

Modification	4				Drawn				
	3				23/11/20 J.S.				
	2				Checked				
	1				23/11/20 O.V.				
	nº	Modified	Date	Reason	General Tolerance				
Comments					ISO 2768 c-K	Part name	Relay valve		
					Material	ID. Reference	2991085		
					-	Scale: 2/3			Sheet 2/2
						Review: 0			