
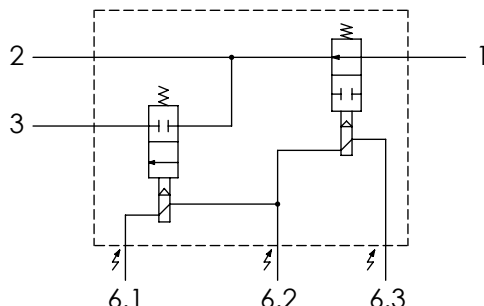
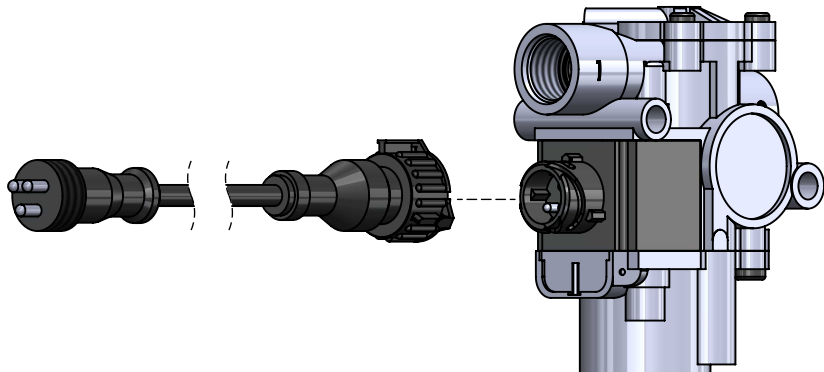



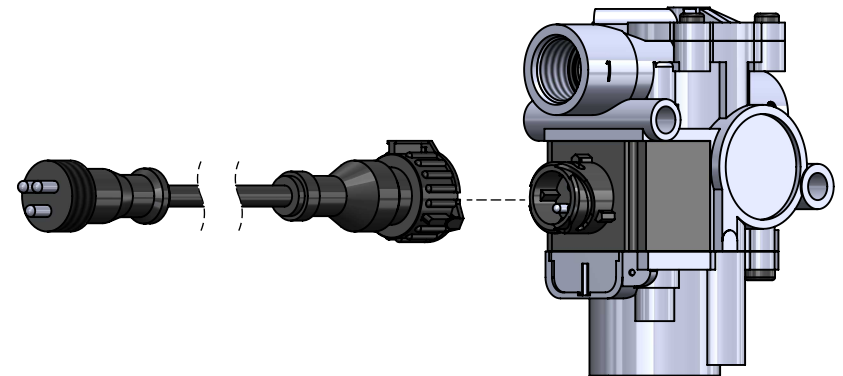
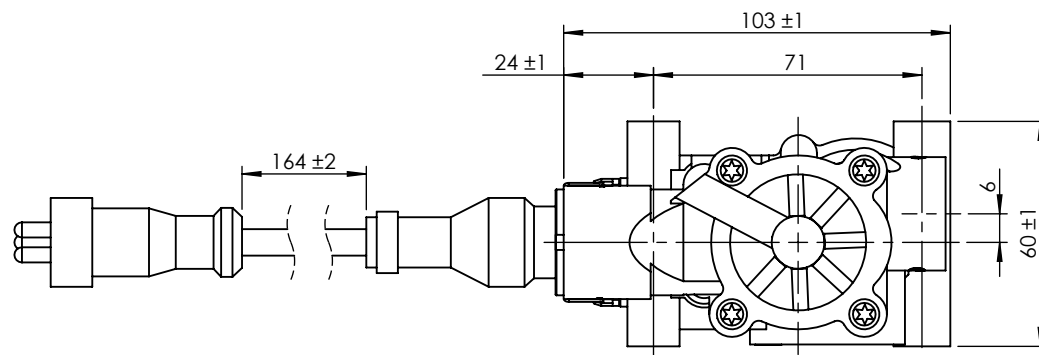
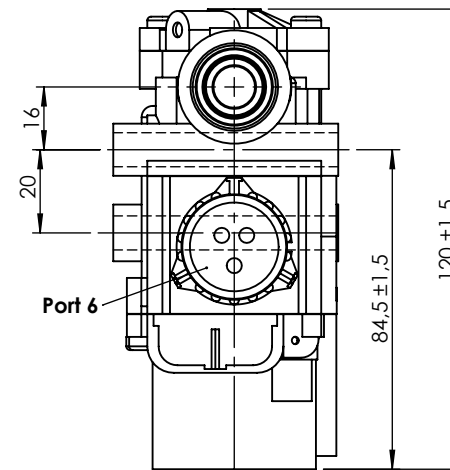
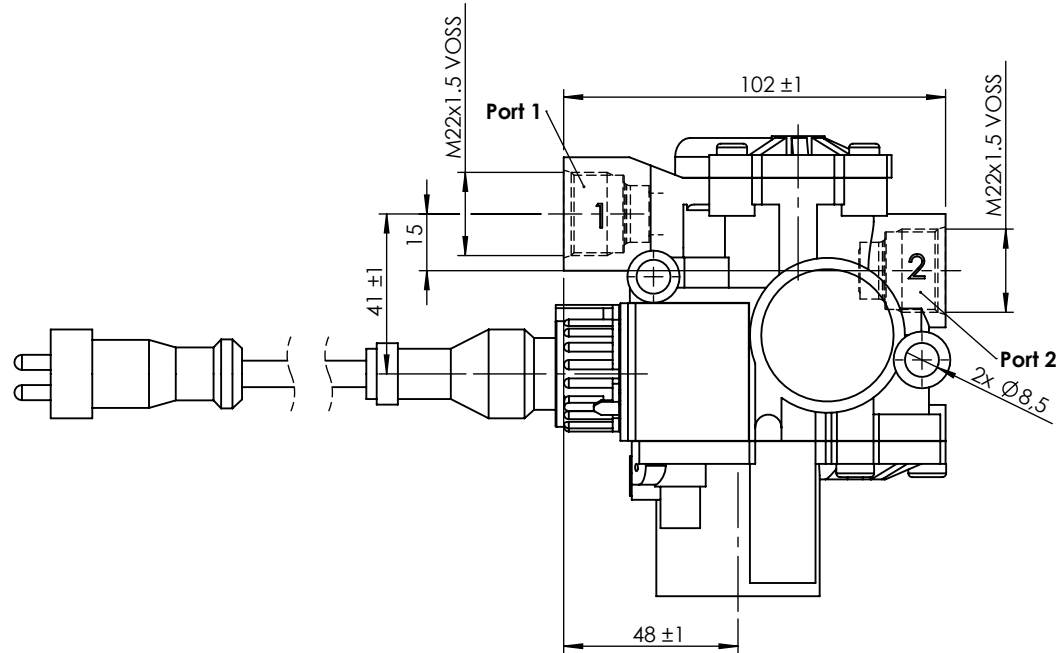


1		2		3		4																																																			
A Technical sheet / Datos técnicos:																																																									
<table><tr><td>Part number adaptable to / Referencia adaptable a</td><td>4721959212</td></tr><tr><td>Working pressure / Presión de trabajo</td><td>max 13 bar</td></tr><tr><td>Type of current / Tipo de corriente</td><td>Direct current/ Corriente continua</td></tr><tr><td>Voltage / Voltaje</td><td>24 V</td></tr><tr><td>Nominal current / Corriente nominal</td><td>1.65 A</td></tr><tr><td>Permissible medium / Medio de funcionamiento</td><td>Air / Aire</td></tr><tr><td>Operating temperature range / Rango de temperatura</td><td>-40°C to / a +80°C</td></tr><tr><td>Weight / Peso</td><td>665 gr</td></tr></table>								Part number adaptable to / Referencia adaptable a	4721959212	Working pressure / Presión de trabajo	max 13 bar	Type of current / Tipo de corriente	Direct current/ Corriente continua	Voltage / Voltaje	24 V	Nominal current / Corriente nominal	1.65 A	Permissible medium / Medio de funcionamiento	Air / Aire	Operating temperature range / Rango de temperatura	-40°C to / a +80°C	Weight / Peso	665 gr																																		
Part number adaptable to / Referencia adaptable a	4721959212																																																								
Working pressure / Presión de trabajo	max 13 bar																																																								
Type of current / Tipo de corriente	Direct current/ Corriente continua																																																								
Voltage / Voltaje	24 V																																																								
Nominal current / Corriente nominal	1.65 A																																																								
Permissible medium / Medio de funcionamiento	Air / Aire																																																								
Operating temperature range / Rango de temperatura	-40°C to / a +80°C																																																								
Weight / Peso	665 gr																																																								
B																																																									
C  																																																									
D <table><tr><th>Port / Conexión</th><th>Function / Función</th><th>Thread / Rosca</th></tr><tr><td>1</td><td>Supply / Alimentación</td><td>M22x1.5 VOSS</td></tr><tr><td>2</td><td>Delivery / Salida</td><td>M22x1.5 VOSS</td></tr><tr><td>3</td><td>Exhaust / Escape</td><td>-</td></tr><tr><td>6</td><td>Connector / Conector</td><td>M24x1</td></tr></table>								Port / Conexión	Function / Función	Thread / Rosca	1	Supply / Alimentación	M22x1.5 VOSS	2	Delivery / Salida	M22x1.5 VOSS	3	Exhaust / Escape	-	6	Connector / Conector	M24x1																																			
Port / Conexión	Function / Función	Thread / Rosca																																																							
1	Supply / Alimentación	M22x1.5 VOSS																																																							
2	Delivery / Salida	M22x1.5 VOSS																																																							
3	Exhaust / Escape	-																																																							
6	Connector / Conector	M24x1																																																							
E Purpose / Propósito: Increase, reduce or maintain the pressure in the brake cylinders during a braking process according to the regulation of the ABS electronic control unit. / Aumentar, reducir o mantener la presión en los cilindros de freno durante un proceso de frenado según la regulación de la unidad de control electrónico ABS. Installation requirements / Requisitos para la instalación: To install the modulator with the exhaust port facing downwards. The modulator must be installed using two screws M8. / Instalar el modulator con el escape orientado hacia abajo. El modulator debe ser instalado utilizando dos tornillos M8.																																																									
F <table><tr><td rowspan="5">Modification</td><td>4</td><td></td><td></td><td></td><td>Drawn</td><td rowspan="5"></td></tr><tr><td>3</td><td></td><td></td><td></td><td>26/08/13 A.U.</td></tr><tr><td>2</td><td></td><td></td><td></td><td>Checked</td></tr><tr><td>1</td><td></td><td></td><td></td><td>26/08/13 A.L.</td></tr><tr><td>nº</td><td>Modified</td><td>Date</td><td>Reason</td><td>General Tolerance</td><td>Assembly</td></tr><tr><td colspan="5">Comments</td><td>-</td><td>Part name</td><td>ABS modulator</td></tr><tr><td colspan="5" rowspan="3"></td><td>Material</td><td>ID. Reference</td><td>2209217</td></tr><tr><td>-</td><td>Scale: -</td><td rowspan="2"></td><td rowspan="2">Sheet 1/2</td></tr><tr><td>-</td><td>Review: 0</td></tr></table>								Modification	4				Drawn		3				26/08/13 A.U.	2				Checked	1				26/08/13 A.L.	nº	Modified	Date	Reason	General Tolerance	Assembly	Comments					-	Part name	ABS modulator						Material	ID. Reference	2209217	-	Scale: -		Sheet 1/2	-	Review: 0
Modification	4				Drawn																																																				
	3				26/08/13 A.U.																																																				
	2				Checked																																																				
	1				26/08/13 A.L.																																																				
	nº	Modified	Date	Reason	General Tolerance		Assembly																																																		
Comments					-	Part name	ABS modulator																																																		
					Material	ID. Reference	2209217																																																		
					-	Scale: -		Sheet 1/2																																																	
					-	Review: 0																																																			
PG/18/02 rev.1 1		2		3		4																																																			



Modification	4				Drawn	
	3				26/08/13 A.U.	
	2				Checked	
	1				26/08/13 A.L.	
	n°	Modified	Date	Reason	General Tolerance	-
Comments					Assembly	-
					Part name	ABS modulator
					ID. Reference	2209216
					Scale: 1/2	
					Review: 0	

Sheet
2/2