


Technical data / Datos técnicos:









Part number adaptable to / Referencia adaptable a	4728900510
Operating pressure / Presión de trabajo	max. 13 bar
Permissible medium / Medio de funcionamiento	Air / Aire
Operating temperature range / Rango de temperatura	-40°C to / a +80°C
Weight / Peso	1500 gr

Solenoid valve specifications / Especificaciones de la electroválvula	
Nominal voltage / Voltaje nominal	24 V
Nominal current / Corriente nominal	max. 0,32 A


Pneumatic scheme / Esquema neumático:

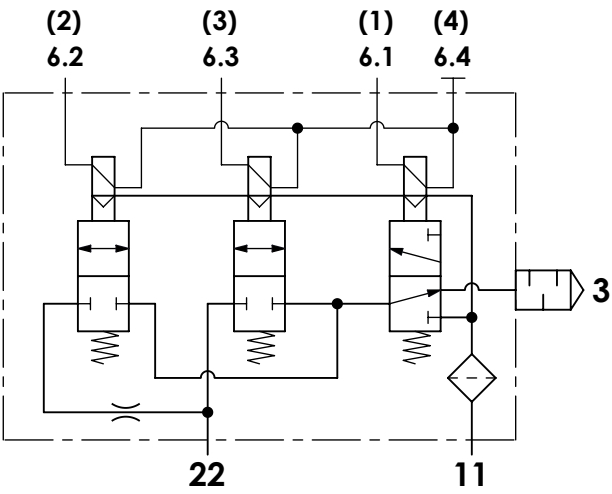

Installation position / Posición de montaje:

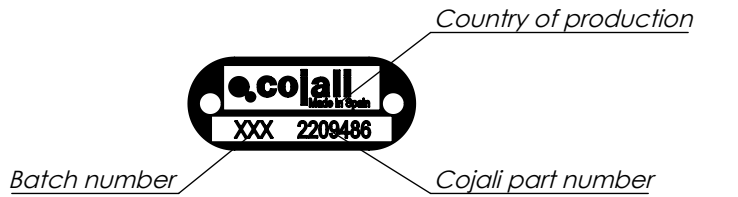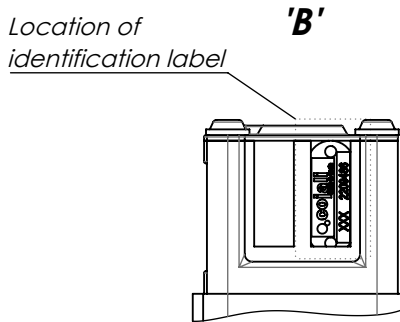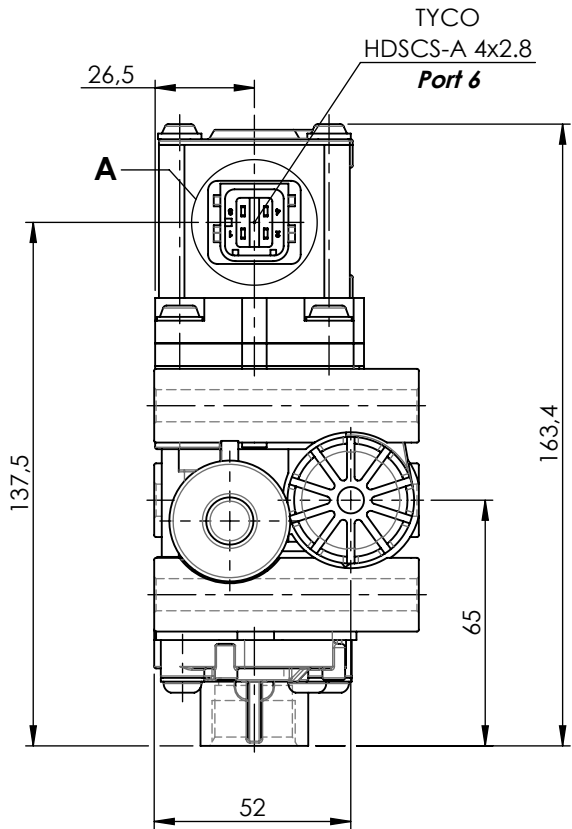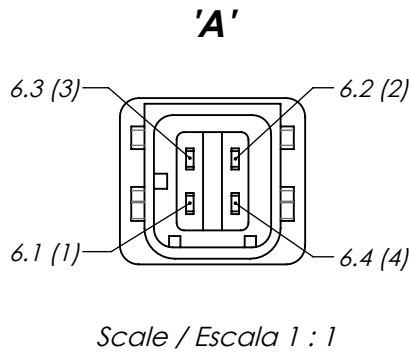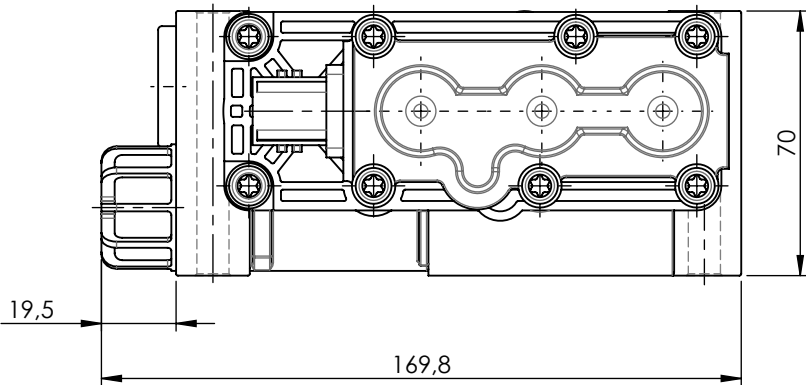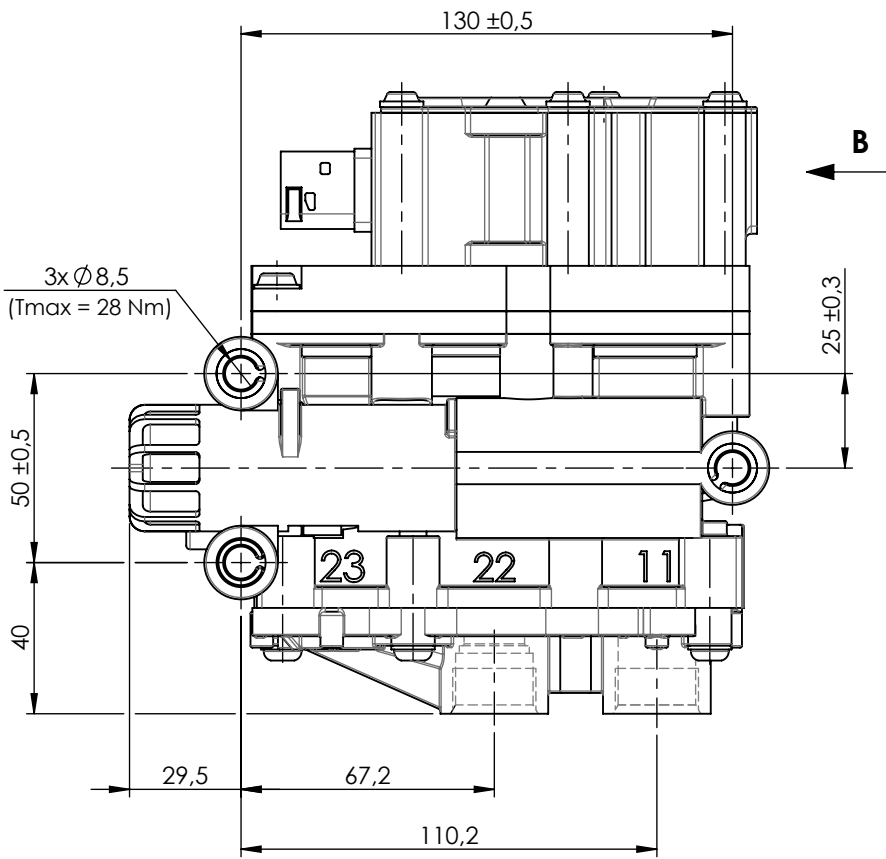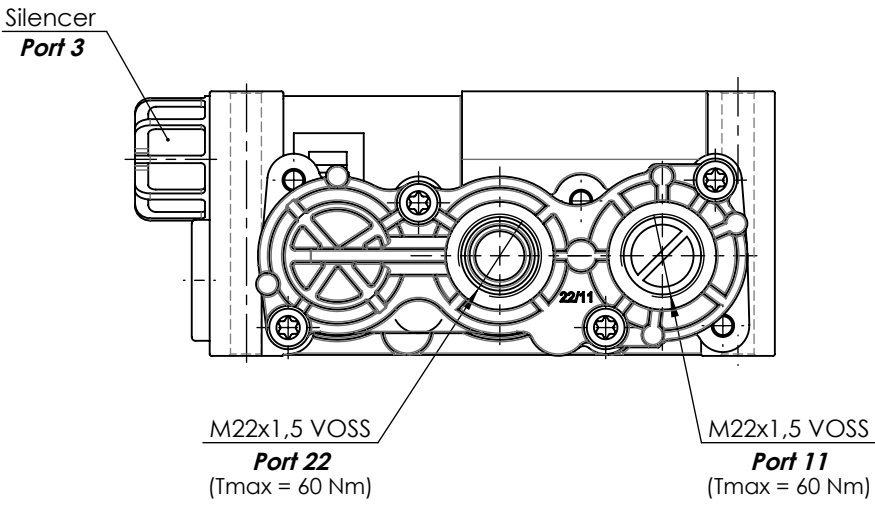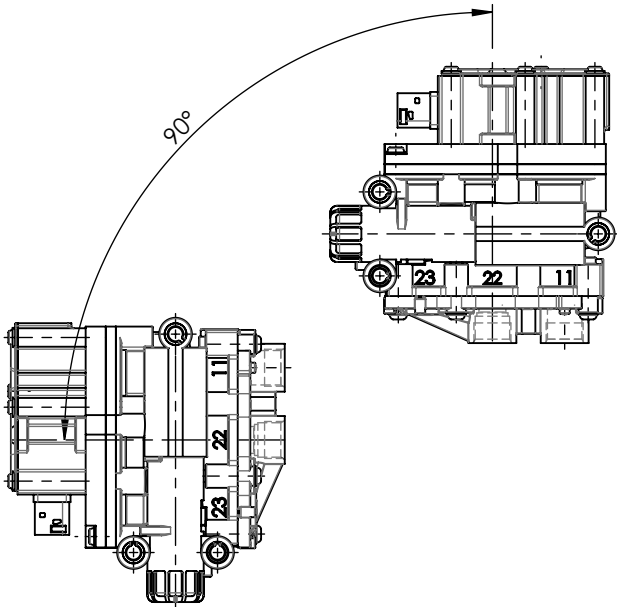

Scale / Escala 1 : 1

Modification	4				Drawn			
	3				06/11/20 J.S.			
	2				Checked			
	1	J.S.	22/08/23	Modify sheet format	06/11/20 O.V.			
	nº Modified	Date	Reason	General Tolerance		Assembly	-	
Comments					ISO 2768 v-K	Part name	ECAS Solenoid Valve	
					Material	ID. Reference	2209486	
					-	Scale: 1/2		Sheet 1/1
						Review: 1		