
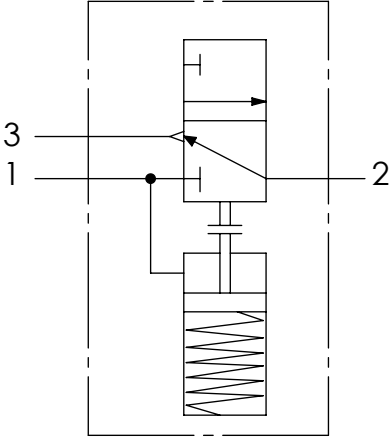
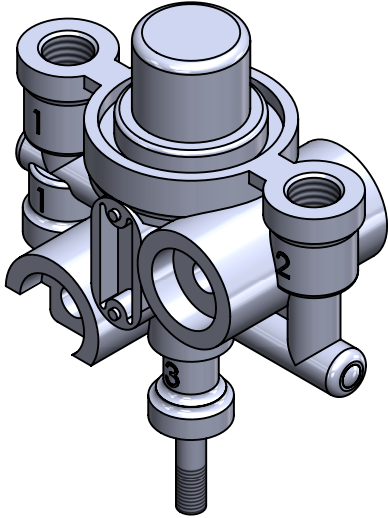



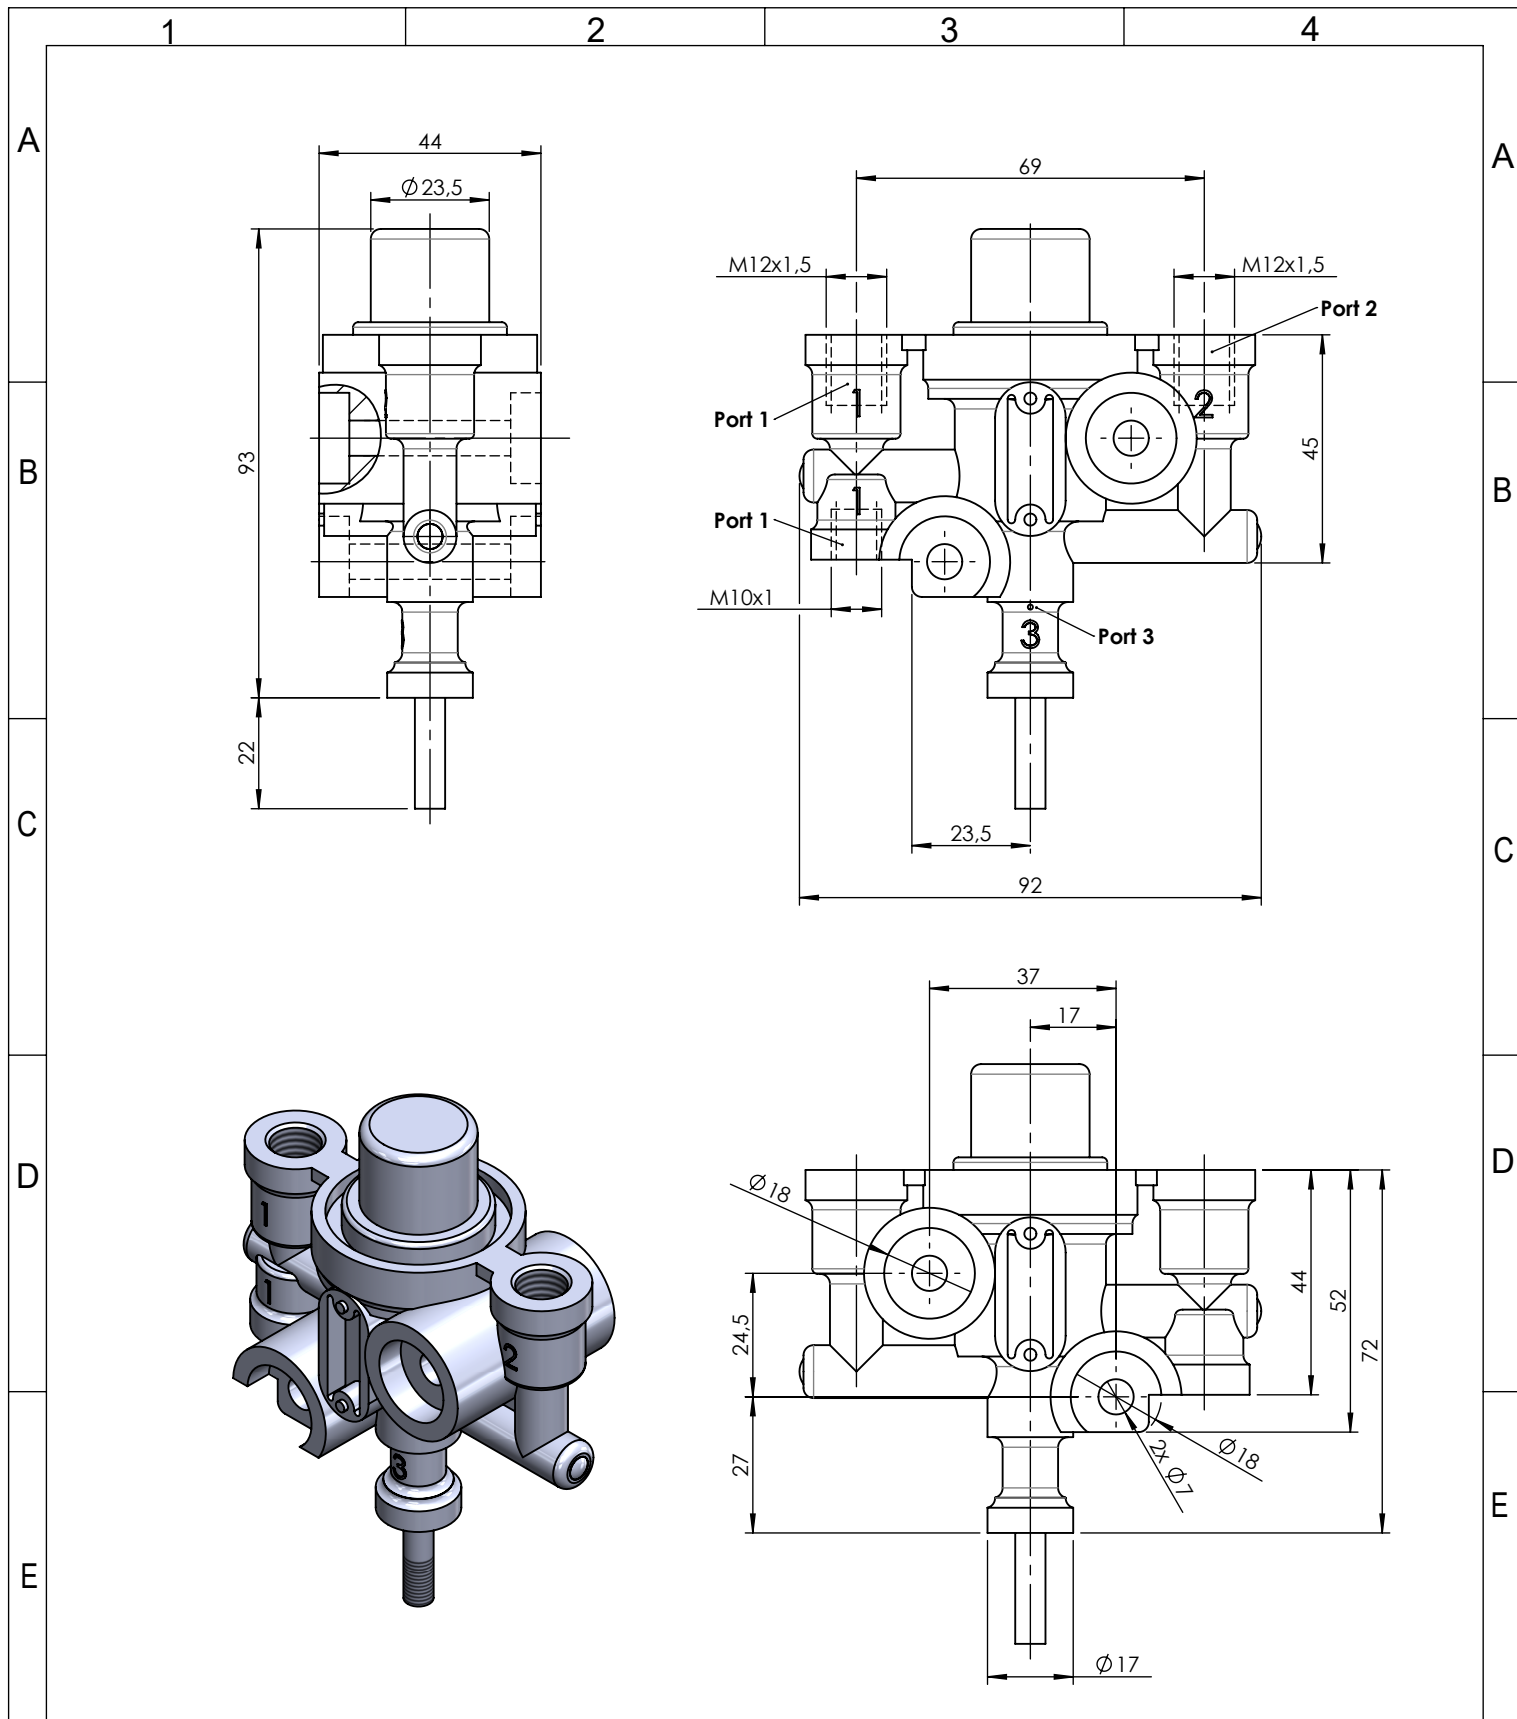


	1	2	3	4																																																																	
A	Technical sheet / Datos técnicos:																																																																				
B	Part number adaptable to / Referencia adaptable a		4342050320																																																																		
	Working pressure / Presión de trabajo		max 10 bar																																																																		
	Stroke / Carrera		5 mm																																																																		
	Permissible medium / Medio de funcionamiento		Air / Aire																																																																		
	Operating temperature range / Rango de temperatura		-40 °C to / a +80 °C																																																																		
B	Weight / Peso		500 gr																																																																		
C	 																																																																				
D	<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Supply / Alimentación</td> <td>M12x1.5</td> </tr> <tr> <td>1</td> <td>Supply / Alimentación</td> <td>M10x1</td> </tr> <tr> <td>2</td> <td>Delivery / Salida</td> <td>M12x1.5</td> </tr> <tr> <td>3</td> <td>Exhaust / Escape</td> <td>-</td> </tr> </tbody> </table>				Port / Conexión	Function / Función	Thread / Rosca	1	Supply / Alimentación	M12x1.5	1	Supply / Alimentación	M10x1	2	Delivery / Salida	M12x1.5	3	Exhaust / Escape	-																																																		
Port / Conexión	Function / Función	Thread / Rosca																																																																			
1	Supply / Alimentación	M12x1.5																																																																			
1	Supply / Alimentación	M10x1																																																																			
2	Delivery / Salida	M12x1.5																																																																			
3	Exhaust / Escape	-																																																																			
E	Purpose / Propósito: To ventilate and to purge operating cylinders. / Ventilar y purgar los cilindros operativos. Installation requirements / Requisitos para la instalación: The valve must be installed using two screws M7. / La válvula debe ser instalada usando dos tornillos M7.																																																																				
F	<table border="1"> <thead> <tr> <th rowspan="2">Modification nº</th> <th rowspan="2">Modified</th> <th rowspan="2">Date</th> <th rowspan="2">Reason</th> <th rowspan="2">General Tolerance</th> <th colspan="2"></th> </tr> <tr> <th>Assembly</th> <th>-</th> </tr> </thead> <tbody> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td>Drawn</td> <td rowspan="4">  </td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td>07/06/19 R.A.</td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td></td> <td>Checked</td> </tr> <tr> <td>1</td> <td></td> <td></td> <td></td> <td></td> <td>07/06/19 O.V.</td> </tr> <tr> <td colspan="5">Comments</td> <td>-</td> <td>Part name</td> <td>3/2 ways valve</td> </tr> <tr> <td colspan="5"></td> <td>Material</td> <td>ID. Reference</td> <td>2215207</td> </tr> <tr> <td colspan="5"></td> <td>-</td> <td>Scale: -</td> <td rowspan="2">  </td> </tr> <tr> <td colspan="5"></td> <td>-</td> <td>Review: 0</td> </tr> </tbody> </table>				Modification nº	Modified	Date	Reason	General Tolerance			Assembly	-	4					Drawn		3					07/06/19 R.A.	2					Checked	1					07/06/19 O.V.	Comments					-	Part name	3/2 ways valve						Material	ID. Reference	2215207						-	Scale: -							-	Review: 0
Modification nº	Modified	Date	Reason	General Tolerance																																																																	
					Assembly	-																																																															
4					Drawn																																																																
3					07/06/19 R.A.																																																																
2					Checked																																																																
1					07/06/19 O.V.																																																																
Comments					-	Part name	3/2 ways valve																																																														
					Material	ID. Reference	2215207																																																														
					-	Scale: -																																																															
					-	Review: 0																																																															
PG/18/02 rev.1 1		2	3	4																																																																	



F	Modification	4				Drawn			F
		3				07/06/19 R.A.			
		2				Checked			
		1				07/06/19 O.V.			
		nº	Modified	Date	Reason	General Tolerance			
	Comments				ISO 2768 c-K	Part name	3/2 ways valve		
					Material	ID. Reference	2215207		
-					Scale: 2/3		Sheet 2/2		
					Review: 0				
PG/18/02 rev.1 1			2		3		4		