
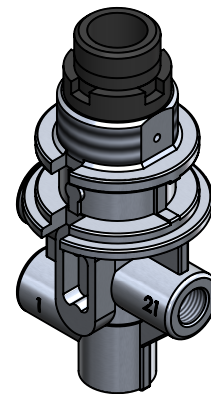
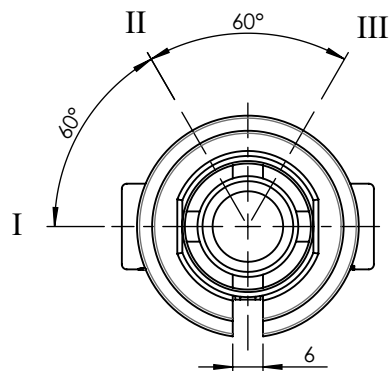
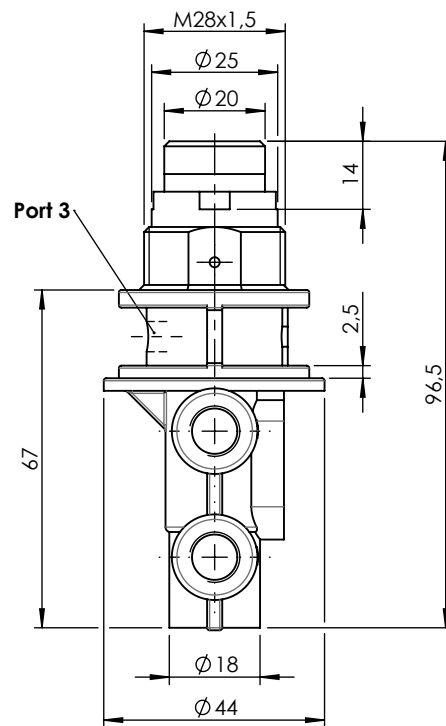
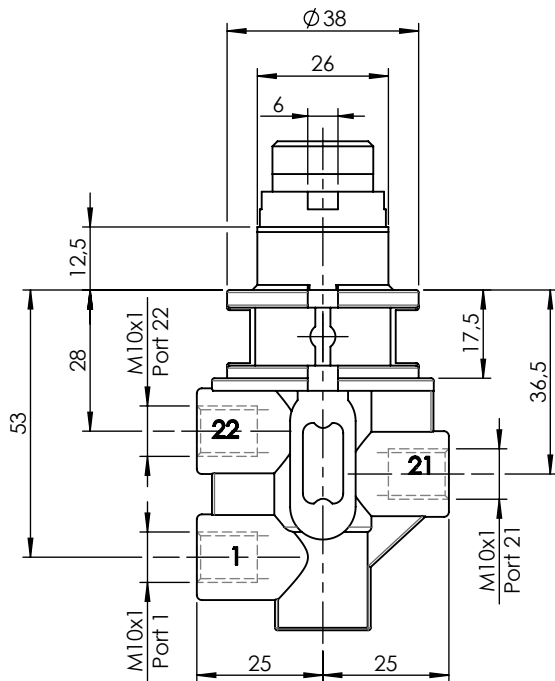


1		2		3		4																																																				
A	Technical sheet / Datos técnicos:																																																									
	Part number adaptable to / Referencia adaptable a					4630370000																																																				
	Operating pressure / Presión de trabajo					max. 10 bar																																																				
	Permissible medium / Medio de funcionamiento					Air / Aire																																																				
	Operating temperature range / Rango de temperatura					-25°C to / a +80°C																																																				
B	Weight / Peso					250 gr																																																				
C																																																										
D	<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Supply / Alimentación</td> <td>M10x1,0</td> </tr> <tr> <td>21</td> <td>Delivery / Salida</td> <td>M10x1,0</td> </tr> <tr> <td>22</td> <td>Delivery / Salida</td> <td>M10x1,0</td> </tr> <tr> <td>3</td> <td>Exhaust / Escape</td> <td>-</td> </tr> </tbody> </table>							Port / Conexión	Function / Función	Thread / Rosca	1	Supply / Alimentación	M10x1,0	21	Delivery / Salida	M10x1,0	22	Delivery / Salida	M10x1,0	3	Exhaust / Escape	-																																				
Port / Conexión	Function / Función	Thread / Rosca																																																								
1	Supply / Alimentación	M10x1,0																																																								
21	Delivery / Salida	M10x1,0																																																								
22	Delivery / Salida	M10x1,0																																																								
3	Exhaust / Escape	-																																																								
E	Purpose / Propósito: To ventilate and to purge operating cylinders. / Ventilar y purgar los cilindros operativos. Installation requirements / Requisitos para la instalación: Mounting is accomplished with one nut M28. / El montaje se realiza mediante una tuerca M28.																																																									
F	<table border="1"> <thead> <tr> <th rowspan="2">Modification nº</th> <th rowspan="2">Modified</th> <th rowspan="2">Date</th> <th rowspan="2">Reason</th> <th rowspan="2">General Tolerance</th> <th colspan="2">Assembly</th> </tr> <tr> <th>Part name</th> <th>ID. Reference</th> </tr> </thead> <tbody> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td>Drawn</td> <td rowspan="4"> </td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td>22/01/18 J.S.</td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td></td> <td>Checked</td> </tr> <tr> <td>1</td> <td></td> <td></td> <td></td> <td></td> <td>22/01/18 O.V.</td> </tr> <tr> <td colspan="5" rowspan="3">Comments</td> <td>-</td> <td>Part name</td> <td>4/3 ways valve</td> </tr> <tr> <td>Material</td> <td>ID. Reference</td> <td>2215217</td> </tr> <tr> <td>-</td> <td>Scale: -</td> <td rowspan="2"> </td> <td rowspan="2">Sheet 1/2</td> </tr> <tr> <td></td> <td>Review: 0</td> </tr> </tbody> </table>							Modification nº	Modified	Date	Reason	General Tolerance	Assembly		Part name	ID. Reference	4					Drawn		3					22/01/18 J.S.	2					Checked	1					22/01/18 O.V.	Comments					-	Part name	4/3 ways valve	Material	ID. Reference	2215217	-	Scale: -		Sheet 1/2		Review: 0
Modification nº	Modified	Date	Reason	General Tolerance	Assembly																																																					
					Part name	ID. Reference																																																				
4					Drawn																																																					
3					22/01/18 J.S.																																																					
2					Checked																																																					
1					22/01/18 O.V.																																																					
Comments					-	Part name	4/3 ways valve																																																			
					Material	ID. Reference	2215217																																																			
					-	Scale: -		Sheet 1/2																																																		
	Review: 0																																																									
PG/18/02 rev.1 1		2		3		4																																																				



F	Modification	4				Drawn		
		3				22/01/18 J.S.		
		2				Checked		
		1				22/01/18 O.V.		
		nº	Modified	Date	Reason	General Tolerance	Assembly	-
Comments					ISO 2768 c-K	Part name	4/3 ways valve	
					Material	ID. Reference	2215217	
					-	Scale: 2/3		Sheet 2/2
						Review: 0		
PG/18/02 rev.1 1			2		3		4	