
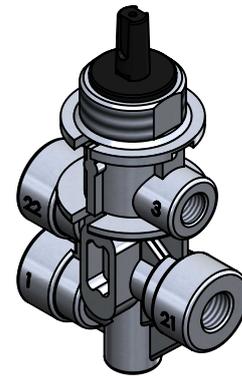


Technical sheet / Datos técnicos:

Part number adaptable to / Referencia adaptable a	4630372020
Operating pressure / Presión de trabajo	max. 11 bar
Permissible medium / Medio de funcionamiento	Air / Aire
Operating temperature range / Rango de temperatura	-40 °C to / a +80 °C
Weight / Peso	300 gr

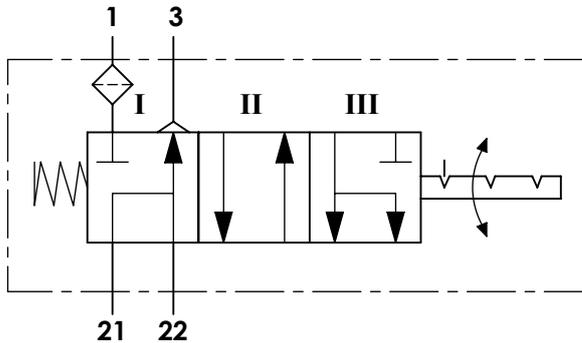

Port / Conexión	Function / Función	Thread / Rosca
1	Supply / Alimentación	M12x1,5
21	Delivery / Salida	M12x1,5
22	Delivery / Salida	M12x1,5
3	Exhaust / Escape	M10x1,0





Purpose / Propósito:

To ventilate and to purge operating cylinders. / Ventilar y purgar los cilindros operativos.

Installation requirements / Requisitos para la instalación:

Mounting is accomplished with one nut M28. / El montaje se realiza mediante una tuerca M28.

Modification	4				Drawn		
	3				22/01/18 J.S.		
	2				Checked		
	1				22/01/18 O.V.		
F	nº	Modified	Date	Reason	General Tolerance	Assembly	-
	Comments				-	Part name	4/3 ways valve
					Material	ID. Reference	2215224
					-	Scale: -	
				-	Review: 0	Sheet 1/2	

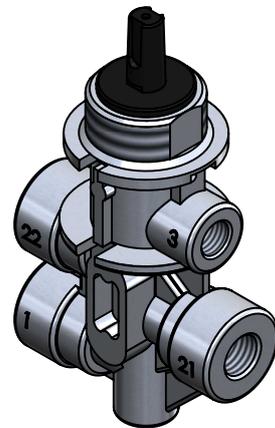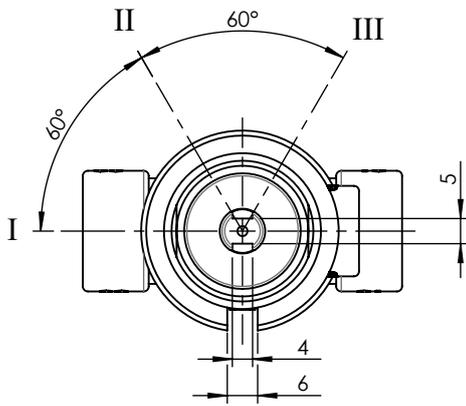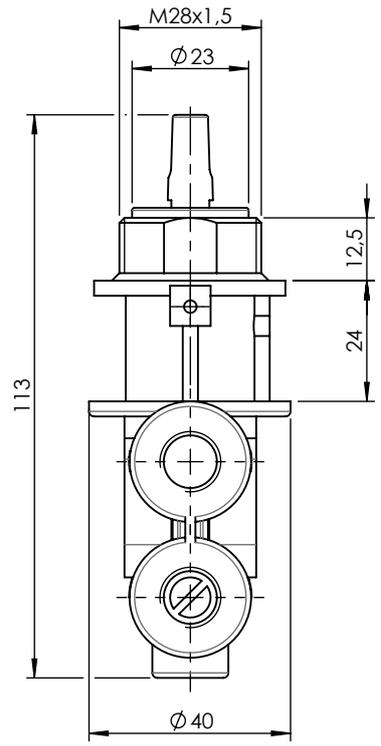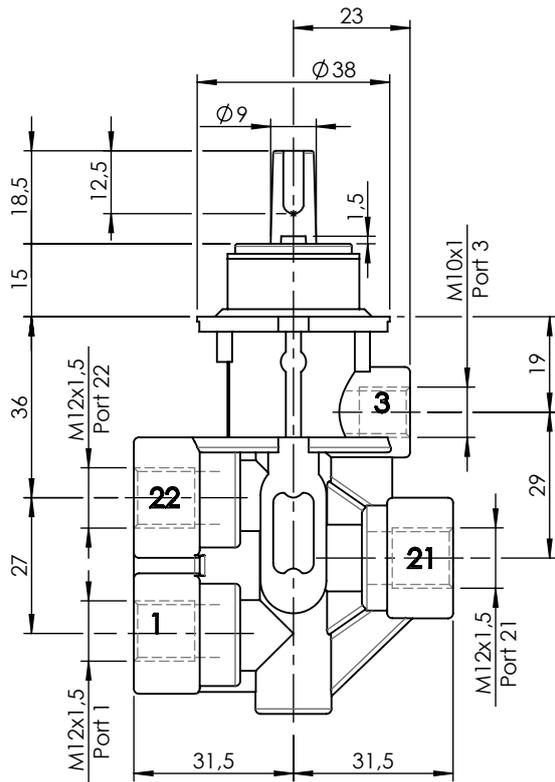

F	Modification	4				Drawn		
		3				22/01/18 J.S.		
		2				Checked		
		1				22/01/18 O.V.		
	nº	Modified	Date	Reason	General Tolerance	Assembly	-	
Comments					ISO 2768 c-K	Part name	4/3 ways valve	
					Material	ID. Reference	2215224	
					-	Scale: 2/3		Sheet 2/2
					-	Review: 0		