
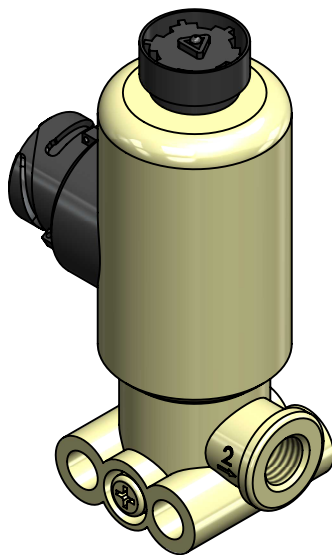


1		2		3		4																																																																				
A	Technical sheet / Datos técnicos:																																																																									
	<table border="1"> <tr> <td>Part number adaptable to / Referencia adaptable a</td> <td colspan="6">4721706860</td> </tr> <tr> <td>Working pressure / Presión de trabajo</td> <td colspan="6">max. 11 bar</td> </tr> <tr> <td>Type of current / Tipo de corriente:</td> <td colspan="6">Direct current / Corriente continua</td> </tr> <tr> <td>Voltage / Voltaje:</td> <td colspan="6">24 V</td> </tr> <tr> <td>Nominal current / Corriente nominal:</td> <td colspan="6">0.69 A</td> </tr> <tr> <td>Permissible medium / Medio de funcionamiento</td> <td colspan="6">Air / Aire</td> </tr> <tr> <td>Operating temperature range / Rango de temperatura</td> <td colspan="6">-40 °C to / a +80 °C</td> </tr> <tr> <td>Weight / Peso</td> <td colspan="6">480 gr</td> </tr> </table>							Part number adaptable to / Referencia adaptable a	4721706860						Working pressure / Presión de trabajo	max. 11 bar						Type of current / Tipo de corriente:	Direct current / Corriente continua						Voltage / Voltaje:	24 V						Nominal current / Corriente nominal:	0.69 A						Permissible medium / Medio de funcionamiento	Air / Aire						Operating temperature range / Rango de temperatura	-40 °C to / a +80 °C						Weight / Peso	480 gr																
Part number adaptable to / Referencia adaptable a	4721706860																																																																									
Working pressure / Presión de trabajo	max. 11 bar																																																																									
Type of current / Tipo de corriente:	Direct current / Corriente continua																																																																									
Voltage / Voltaje:	24 V																																																																									
Nominal current / Corriente nominal:	0.69 A																																																																									
Permissible medium / Medio de funcionamiento	Air / Aire																																																																									
Operating temperature range / Rango de temperatura	-40 °C to / a +80 °C																																																																									
Weight / Peso	480 gr																																																																									
B																																																																										
C																																																																										
D	<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Supply / Alimentación</td> <td>M12x1.5</td> </tr> <tr> <td>2</td> <td>Delivery / Salida</td> <td>M12x1.5</td> </tr> <tr> <td>3</td> <td>Exhaust / Escape</td> <td>-</td> </tr> <tr> <td>6</td> <td>Conector / Conector</td> <td>DIN 72585-A1-2.1-Sn/K2</td> </tr> </tbody> </table>							Port / Conexión	Function / Función	Thread / Rosca	1	Supply / Alimentación	M12x1.5	2	Delivery / Salida	M12x1.5	3	Exhaust / Escape	-	6	Conector / Conector	DIN 72585-A1-2.1-Sn/K2																																																				
Port / Conexión	Function / Función	Thread / Rosca																																																																								
1	Supply / Alimentación	M12x1.5																																																																								
2	Delivery / Salida	M12x1.5																																																																								
3	Exhaust / Escape	-																																																																								
6	Conector / Conector	DIN 72585-A1-2.1-Sn/K2																																																																								
E	Purpose / Propósito: Allow air flows to delivery port when the solenoid is activated / Permitir el paso de aire hacia la conexión de salida cuando se activa el solenoide. Installation requirements / Requisitos para la instalación: The valve must be installed using 2 screws M8. / La válvula debe ser instalada usando dos tornillos M8.																																																																									
F	<table border="1"> <tr> <td rowspan="5">Modification nº</td> <td>4</td> <td></td> <td></td> <td></td> <td>Drawn</td> <td rowspan="5"> </td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td>25/10/18 D.M.</td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td>Checked</td> </tr> <tr> <td>1</td> <td></td> <td></td> <td></td> <td>25/10/18 O.V.</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>nº</td> <td>Modified</td> <td>Date</td> <td>Reason</td> <td>General Tolerance</td> <td>Assembly</td> <td>-</td> </tr> <tr> <td colspan="5">Comments</td> <td>-</td> <td>Part name</td> <td>Solenoid</td> </tr> <tr> <td colspan="5"></td> <td>Material</td> <td>ID. Reference</td> <td>2218224</td> </tr> <tr> <td colspan="5"></td> <td>-</td> <td>Scale: -</td> <td rowspan="2"> </td> </tr> <tr> <td colspan="5"></td> <td>-</td> <td>Review: 0</td> <td>Sheet 1/2</td> </tr> </table>							Modification nº	4				Drawn		3				25/10/18 D.M.	2				Checked	1				25/10/18 O.V.							nº	Modified	Date	Reason	General Tolerance	Assembly	-	Comments					-	Part name	Solenoid						Material	ID. Reference	2218224						-	Scale: -							-	Review: 0	Sheet 1/2
Modification nº	4				Drawn																																																																					
	3				25/10/18 D.M.																																																																					
	2				Checked																																																																					
	1				25/10/18 O.V.																																																																					
	nº	Modified	Date	Reason	General Tolerance	Assembly	-																																																																			
Comments					-	Part name	Solenoid																																																																			
					Material	ID. Reference	2218224																																																																			
					-	Scale: -																																																																				
					-	Review: 0		Sheet 1/2																																																																		
PG/18/02 rev.1 1		2		3		4																																																																				

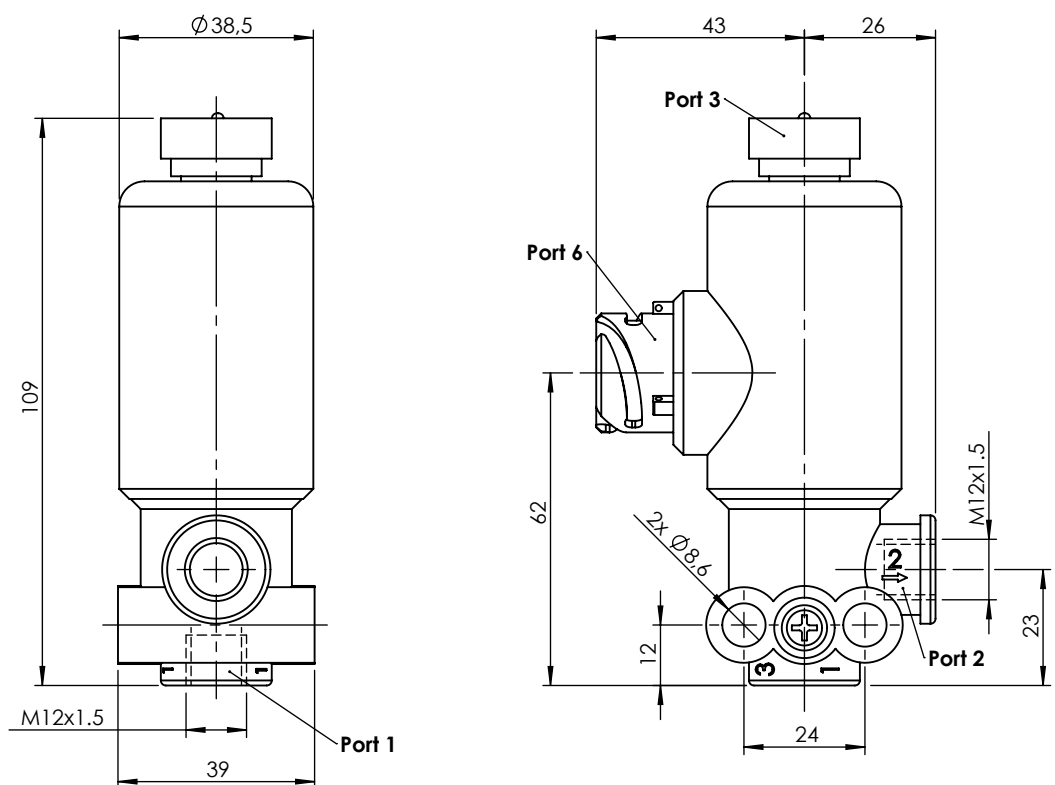

Modification	4					Drawn
	3					25/10/18 D.M.
	2					Checked
	1					25/10/18 O.V.
	nº	Modified	Date	Reason	General Tolerance	Assembly
Comments					ISO 2768 c-K	Part name
					Material	ID. Reference
					-	Scale: 2/3
						Review: 0