
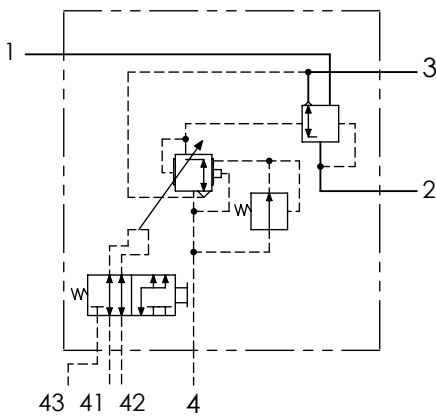




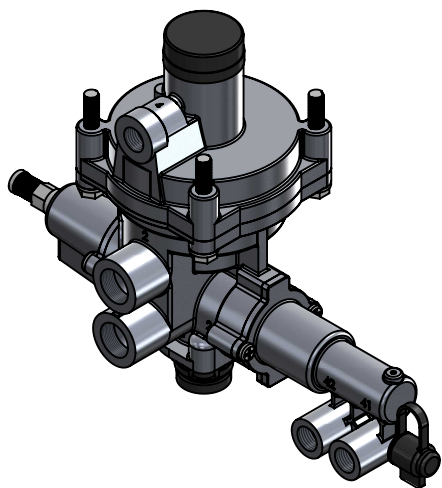
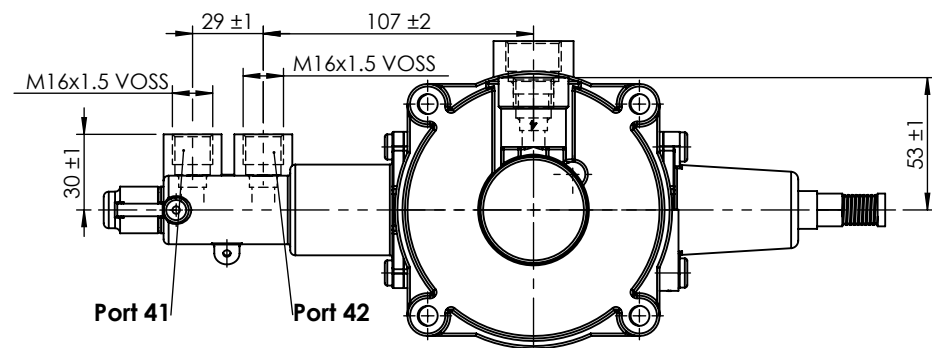
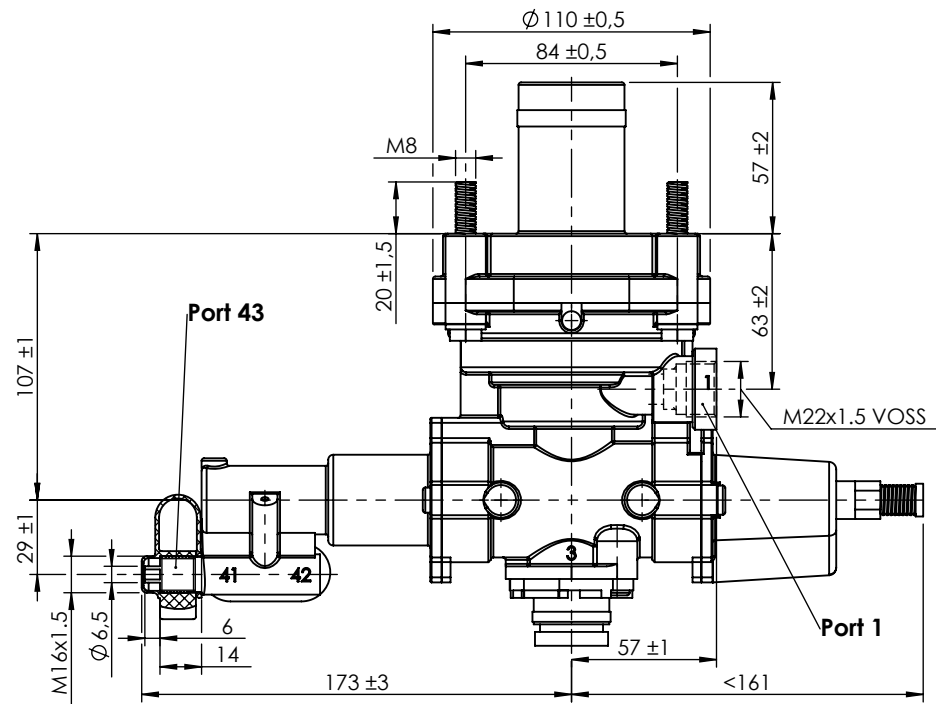
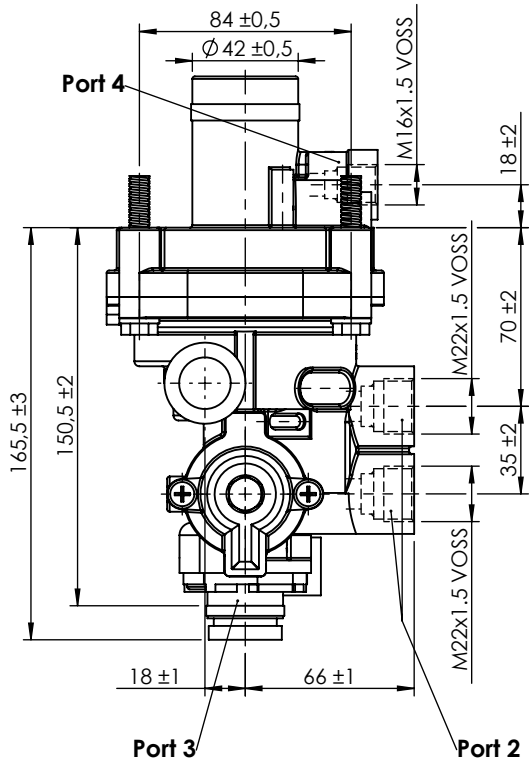


1				2				3				4																																									
A																																																					
Technical sheet / Datos técnicos:																																																					
Part number adaptable to / Referencia adaptable a												4757110500																																									
Operating pressure / Presión de trabajo												max. 13 bar																																									
Regulation index / Índice de regulación												1 : 8																																									
Permissible medium / Medio de funcionamiento												Air / Aire																																									
Operating temperature range / Rango de temperatura												-40 °C to / a +80 °C																																									
Weight / Peso												2100 gr																																									
B																																																					
												<table><tr><th colspan="4">Pressure regulation / Regulación de presión</th></tr><tr><th>Position / Posición</th><th>P1</th><th>P4</th><th>P2</th></tr><tr><td>P41/42 = 0.9 bar</td><td>6.5 bar</td><td>6.5 bar</td><td>1.4 bar</td></tr><tr><td>P41/42 = 6.5 bar</td><td>6.5 bar</td><td>6.5 bar</td><td>6.5 bar</td></tr></table>				Pressure regulation / Regulación de presión				Position / Posición	P1	P4	P2	P41/42 = 0.9 bar	6.5 bar	6.5 bar	1.4 bar	P41/42 = 6.5 bar	6.5 bar	6.5 bar	6.5 bar																						
Pressure regulation / Regulación de presión																																																					
Position / Posición	P1	P4	P2																																																		
P41/42 = 0.9 bar	6.5 bar	6.5 bar	1.4 bar																																																		
P41/42 = 6.5 bar	6.5 bar	6.5 bar	6.5 bar																																																		
C																																																					
												<table><tr><th>Port / Conexión</th><th>Function / Función</th><th>Thread / Rosca</th></tr><tr><td>1</td><td>Supply / Alimentación</td><td>M22x1.5 VOSS</td></tr><tr><td>2</td><td>Delivery / Salida</td><td>2x M22x1.5 VOSS</td></tr><tr><td>3</td><td>Exhaust / Escape</td><td>-</td></tr><tr><td>4</td><td>Control / Pilotaje</td><td>M16x1.5 VOSS</td></tr><tr><td>41</td><td>Suspension control / Pilotaje suspensión</td><td>M16x1.5 VOSS</td></tr><tr><td>42</td><td>Suspension control / Pilotaje suspensión</td><td>M16x1.5 VOSS</td></tr><tr><td>43</td><td>Test / Test</td><td>M16x1.5</td></tr></table>				Port / Conexión	Function / Función	Thread / Rosca	1	Supply / Alimentación	M22x1.5 VOSS	2	Delivery / Salida	2x M22x1.5 VOSS	3	Exhaust / Escape	-	4	Control / Pilotaje	M16x1.5 VOSS	41	Suspension control / Pilotaje suspensión	M16x1.5 VOSS	42	Suspension control / Pilotaje suspensión	M16x1.5 VOSS	43	Test / Test	M16x1.5														
Port / Conexión	Function / Función	Thread / Rosca																																																			
1	Supply / Alimentación	M22x1.5 VOSS																																																			
2	Delivery / Salida	2x M22x1.5 VOSS																																																			
3	Exhaust / Escape	-																																																			
4	Control / Pilotaje	M16x1.5 VOSS																																																			
41	Suspension control / Pilotaje suspensión	M16x1.5 VOSS																																																			
42	Suspension control / Pilotaje suspensión	M16x1.5 VOSS																																																			
43	Test / Test	M16x1.5																																																			
D																																																					
Purpose / Propósito: The automatically control braking force on the air brake chambers of vehicles with air suspended axles. Automatic control is dependent upon the air bag pressure which corresponds to the vehicle load. / El control automático de la fuerza de frenado en las cámaras de freno de aire comprimido de los vehículos con ejes dotados de suspensión neumática. El control automático depende de la presión del colchón neumático que corresponde a la carga del vehículo.																																																					
E																																																					
Installation requirements / Requisitos para la instalación: The valve must be installed vertically with the exhaust port (3) pointing downwards. Mounting is accomplished with at least 2 screws M8. / La válvula debe fijarse verticalmente con el escape (3) orientado hacia abajo. El montaje se realiza con, al menos, 2 tornillos M8.																																																					
F																																																					
<table><tr><td rowspan="4">Modification</td><td>4</td><td></td><td></td><td></td><td>Drawn</td><td rowspan="4"></td></tr><tr><td>3</td><td></td><td></td><td></td><td>17/02/11 A.U.</td></tr><tr><td>2</td><td></td><td></td><td></td><td>Checked</td></tr><tr><td>1</td><td></td><td></td><td></td><td>17/02/11 A.L.</td></tr></table>				Modification	4				Drawn		3				17/02/11 A.U.	2				Checked	1				17/02/11 A.L.	<table><tr><td>nº</td><td>Modified</td><td>Date</td><td>Reason</td><td>General Tolerance</td><td>Assembly</td><td>-</td></tr></table>		nº	Modified	Date	Reason	General Tolerance	Assembly	-	<table><tr><td>Comments</td><td>-</td><td>Part name</td><td>ALB</td></tr><tr><td></td><td>Material</td><td>ID. Reference</td><td>2220433</td></tr><tr><td></td><td>-</td><td>Scale: -</td><td rowspan="2"></td></tr><tr><td></td><td></td><td>Review: 0</td></tr></table>		Comments	-	Part name	ALB		Material	ID. Reference	2220433		-	Scale: -				Review: 0	Sheet 1/2	
Modification	4					Drawn																																															
	3					17/02/11 A.U.																																															
	2					Checked																																															
	1				17/02/11 A.L.																																																
nº	Modified	Date	Reason	General Tolerance	Assembly	-																																															
Comments	-	Part name	ALB																																																		
	Material	ID. Reference	2220433																																																		
	-	Scale: -																																																			
		Review: 0																																																			
PG/18/02 rev.1 1				2				3				4																																									



Modification	4					Drawn		
	3					17/02/11 A.U.		
	2					Checked		
	1					17/02/11 A.L.		
	nº	Modified	Date	Reason	General Tolerance	Assembly	-	
Comments					ISO 2768 c-K	Part name	ALB	
					Material	ID. Reference	2220433	
					-	Scale: 1/3		
						Review: 0		
							Sheet 2/2	