
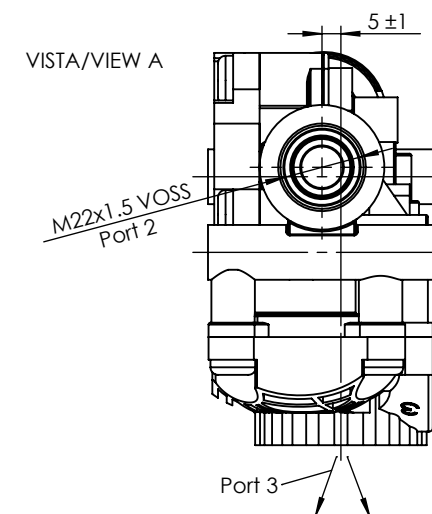
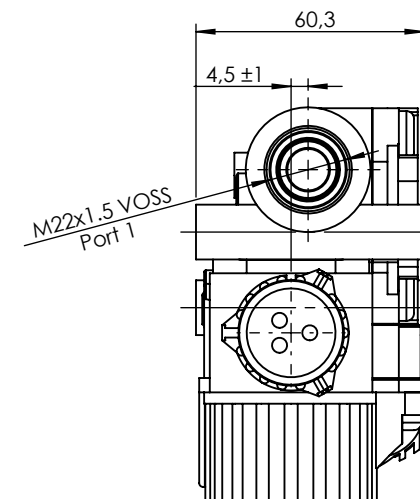
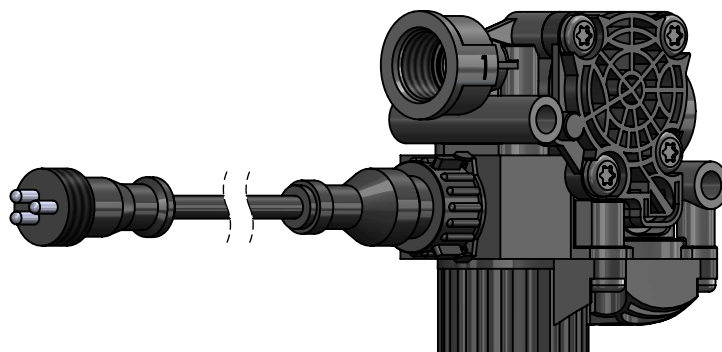
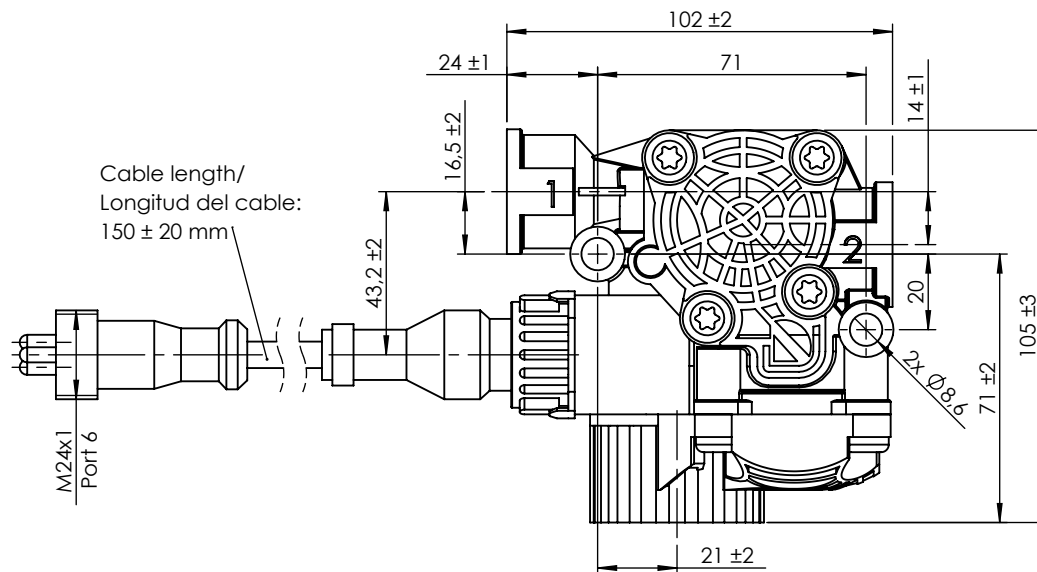


	1	2	3	4																																																									
A	Technical sheet / Datos técnicos:																																																												
	<table border="1"> <tr> <td>Part number adaptable to / Referencia adaptable a</td> <td>K0384381N50</td> </tr> <tr> <td>Working pressure / Presión de trabajo</td> <td>max. 10.2 bar</td> </tr> <tr> <td>Type of current / Tipo de corriente:</td> <td>Direct current / Corriente continua</td> </tr> <tr> <td>Voltage / Voltaje:</td> <td>24 V</td> </tr> <tr> <td>Nominal current / Corriente nominal:</td> <td>1.65 A</td> </tr> <tr> <td>Permissible medium / Medio de funcionamiento</td> <td>Air / Aire</td> </tr> <tr> <td>Operating temperature range / Rango de temperatura</td> <td>-40 °C to / a +80 °C</td> </tr> <tr> <td>Weight / Peso</td> <td>600 gr</td> </tr> </table>				Part number adaptable to / Referencia adaptable a	K0384381N50	Working pressure / Presión de trabajo	max. 10.2 bar	Type of current / Tipo de corriente:	Direct current / Corriente continua	Voltage / Voltaje:	24 V	Nominal current / Corriente nominal:	1.65 A	Permissible medium / Medio de funcionamiento	Air / Aire	Operating temperature range / Rango de temperatura	-40 °C to / a +80 °C	Weight / Peso	600 gr																																									
Part number adaptable to / Referencia adaptable a	K0384381N50																																																												
Working pressure / Presión de trabajo	max. 10.2 bar																																																												
Type of current / Tipo de corriente:	Direct current / Corriente continua																																																												
Voltage / Voltaje:	24 V																																																												
Nominal current / Corriente nominal:	1.65 A																																																												
Permissible medium / Medio de funcionamiento	Air / Aire																																																												
Operating temperature range / Rango de temperatura	-40 °C to / a +80 °C																																																												
Weight / Peso	600 gr																																																												
B																																																													
C																																																													
D	<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Supply / Alimentación</td> <td>M22x1.5 VOSS</td> </tr> <tr> <td>2</td> <td>Delivery / Salida</td> <td>M22x1.5 VOSS</td> </tr> <tr> <td>3</td> <td>Exhaust / Escape</td> <td>-</td> </tr> <tr> <td>6</td> <td>Conector / Conector</td> <td>M24x1</td> </tr> </tbody> </table>				Port / Conexión	Function / Función	Thread / Rosca	1	Supply / Alimentación	M22x1.5 VOSS	2	Delivery / Salida	M22x1.5 VOSS	3	Exhaust / Escape	-	6	Conector / Conector	M24x1																																										
Port / Conexión	Function / Función	Thread / Rosca																																																											
1	Supply / Alimentación	M22x1.5 VOSS																																																											
2	Delivery / Salida	M22x1.5 VOSS																																																											
3	Exhaust / Escape	-																																																											
6	Conector / Conector	M24x1																																																											
E	Purpose / Propósito: Increase, reduce or maintain the pressure in the brake cylinders during a braking process according to the regulation of the ABS electronic control unit. / Aumentar, reducir o mantener la presión en los cilindros de freno durante un proceso de frenado según la regulación de la unidad de control electrónico ABS.																																																												
	Installation requirements / Requisitos para la instalación: To install the modulator with the exhaust port facing downwards. The modulator must be installed using two screws M8. / Instalar el modulator con el escape orientado hacia abajo. El modulator debe ser instalado utilizando dos tornillos M8.																																																												
F	<table border="1"> <tr> <td rowspan="4">Modification</td> <td>4</td> <td></td> <td></td> <td></td> <td>Drawn</td> <td rowspan="4"> </td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td>26/10/20 S.F.</td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td>Checked</td> </tr> <tr> <td>1</td> <td></td> <td></td> <td></td> <td>26/10/20 O.V.</td> </tr> <tr> <td rowspan="4">nº</td> <td>Modified</td> <td>Date</td> <td>Reason</td> <td>General Tolerance</td> <td>Assembly</td> <td>-</td> </tr> <tr> <td colspan="4">Comments</td> <td>-</td> <td>Part name</td> <td>ABS Modulator</td> </tr> <tr> <td colspan="4"></td> <td>Material</td> <td>ID. Reference</td> <td>2309215</td> </tr> <tr> <td colspan="4"></td> <td>-</td> <td>Scale: -</td> <td rowspan="2"> </td> </tr> <tr> <td colspan="4"></td> <td></td> <td>Review: 0</td> <td>Sheet 1/2</td> </tr> </table>				Modification	4				Drawn		3				26/10/20 S.F.	2				Checked	1				26/10/20 O.V.	nº	Modified	Date	Reason	General Tolerance	Assembly	-	Comments				-	Part name	ABS Modulator					Material	ID. Reference	2309215					-	Scale: -							Review: 0	Sheet 1/2
	Modification	4					Drawn																																																						
3						26/10/20 S.F.																																																							
2						Checked																																																							
1					26/10/20 O.V.																																																								
nº	Modified	Date	Reason	General Tolerance	Assembly	-																																																							
	Comments				-	Part name	ABS Modulator																																																						
					Material	ID. Reference	2309215																																																						
					-	Scale: -																																																							
					Review: 0	Sheet 1/2																																																							
PG/18/02 rev.1 1				2	3	4																																																							



Modification	4				Drawn		
	3				26/10/20 S.F.		
	2				Checked		
	1				26/10/20 O.V.		
	nº	Modified	Date	Reason	General Tolerance	Assembly	-
Comments				ISO 2768 c-K	Part name	ABS modulator	
				Material	ID. Reference	2309215	
				-	Scale: 1/2		
					Review: 0		
						Sheet 2/2	