
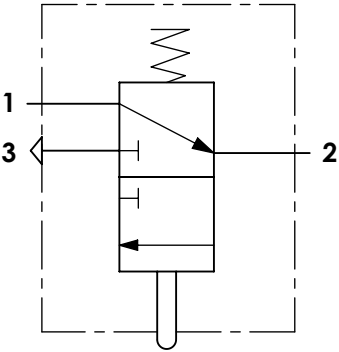
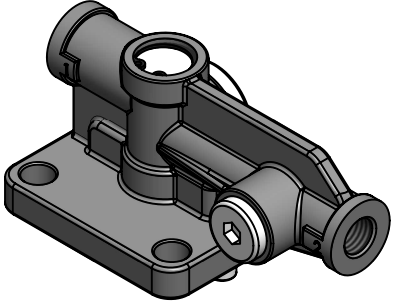
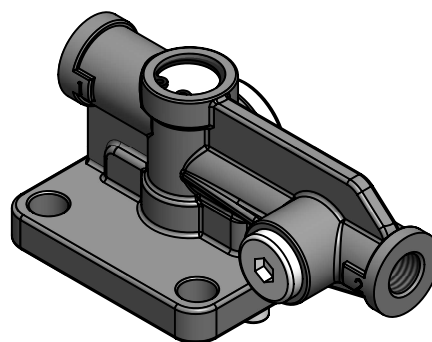
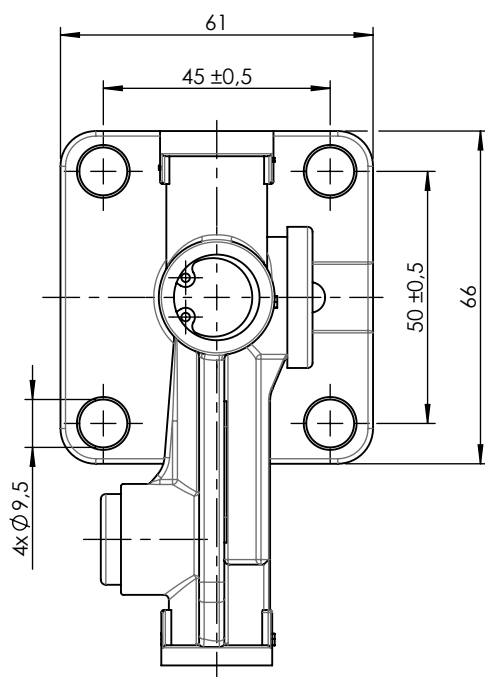
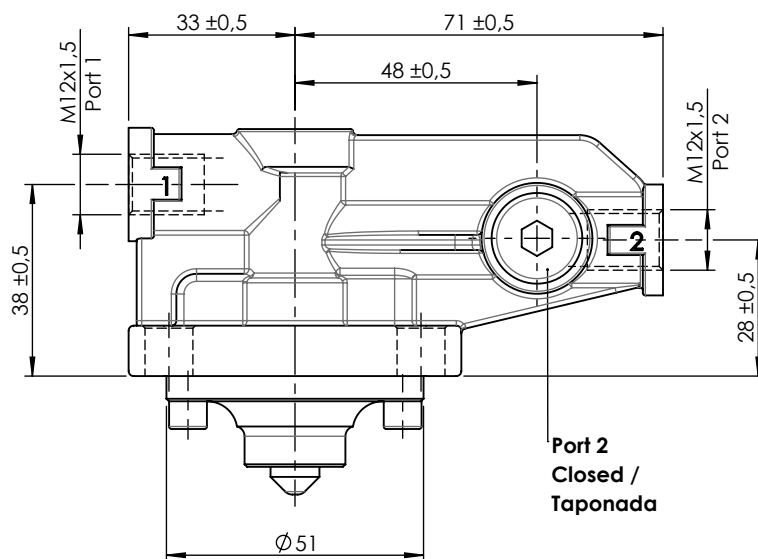
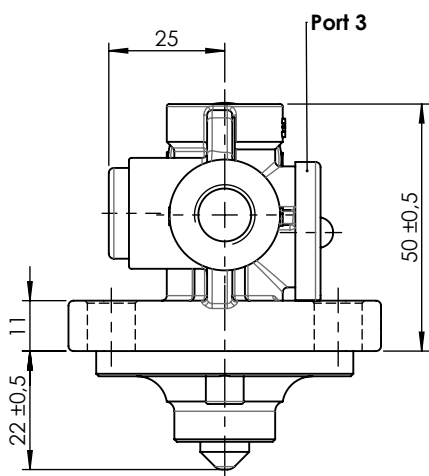


	1	2	3	4																																																			
A	Technical sheet / Datos técnicos:																																																						
B	Part number adaptable to / Referencia adaptable a		SV3302																																																				
	Operating pressure / Presión de trabajo		max. 10 bar																																																				
	Permissible medium / Medio de funcionamiento		Air / Aire																																																				
	Operating temperature range / Rango de temperatura		-25°C to / a +150°C																																																				
	Weight / Peso		350 gr																																																				
C																																																							
D	<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Supply / Alimentación</td> <td>M12x1,5</td> </tr> <tr> <td>2</td> <td>Delivery / Salida</td> <td>M12x1,5</td> </tr> <tr> <td>3</td> <td>Exhaust / Escape</td> <td>-</td> </tr> </tbody> </table>				Port / Conexión	Function / Función	Thread / Rosca	1	Supply / Alimentación	M12x1,5	2	Delivery / Salida	M12x1,5	3	Exhaust / Escape	-																																							
Port / Conexión	Function / Función	Thread / Rosca																																																					
1	Supply / Alimentación	M12x1,5																																																					
2	Delivery / Salida	M12x1,5																																																					
3	Exhaust / Escape	-																																																					
E	Installation requirements / Requisitos para la instalación: Mounting is accomplished with four screws M8. / El montaje se realiza mediante cuatro tornillos M8.																																																						
F	<table border="1"> <tr> <td rowspan="5">Modification</td> <td>4</td> <td></td> <td></td> <td></td> <td>Drawn</td> <td rowspan="5">  </td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td>26/08/15 A.U.</td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td>Checked</td> </tr> <tr> <td>1</td> <td></td> <td></td> <td></td> <td>26/08/15 A.L.</td> </tr> <tr> <td>nº</td> <td>Modified</td> <td>Date</td> <td>Reason</td> <td>General Tolerance</td> <td>Assembly</td> <td>-</td> </tr> <tr> <td colspan="5">Comments</td> <td>-</td> <td>Part name</td> <td>Gearbox valve</td> </tr> <tr> <td colspan="5" rowspan="3"></td> <td>Material</td> <td>ID. Reference</td> <td>2316200</td> </tr> <tr> <td>-</td> <td>Scale: -</td> <td rowspan="2">  </td> <td rowspan="2">Sheet 1/2</td> </tr> <tr> <td>-</td> <td>Review: 0</td> </tr> </table>				Modification	4				Drawn		3				26/08/15 A.U.	2				Checked	1				26/08/15 A.L.	nº	Modified	Date	Reason	General Tolerance	Assembly	-	Comments					-	Part name	Gearbox valve						Material	ID. Reference	2316200	-	Scale: -		Sheet 1/2	-	Review: 0
Modification	4					Drawn																																																	
	3					26/08/15 A.U.																																																	
	2					Checked																																																	
	1					26/08/15 A.L.																																																	
	nº	Modified	Date	Reason	General Tolerance	Assembly		-																																															
Comments					-	Part name	Gearbox valve																																																
					Material	ID. Reference	2316200																																																
					-	Scale: -		Sheet 1/2																																															
					-	Review: 0																																																	
	PG/18/02 rev.1 1	2	3	4																																																			



F	Modification	4				Drawn		
		3				26/08/15 A.U.		
		2				Checked		
		1				26/08/15 A.L.		
		nº	Modified	Date	Reason	General Tolerance		
	Comments				ISO 2768 c-K	Part name	Gearbox valve	
					Material	ID. Reference	2316200	
-					Scale: 2/3		Sheet 2/2	
					Review: 0			
PG/18/02 rev.1 1					2	3	4	