
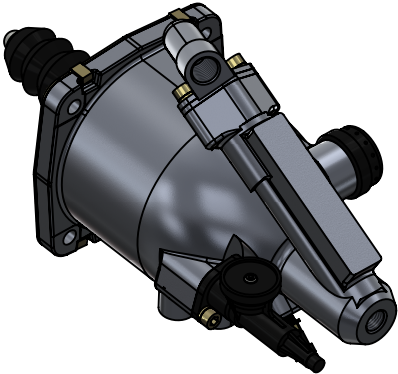

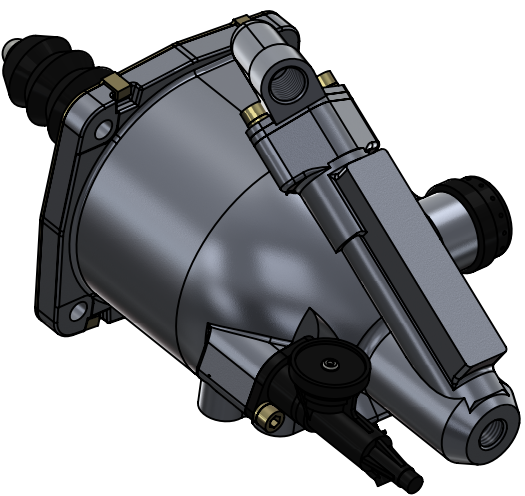


1		2		3		4																							
A	Technical sheet / Datos técnicos:							A																					
B	Part number adaptable to / Referencia adaptable a					5010613951		B																					
	Supply pressure / Presión de alimentación					max. 10 bar																							
	Hydraulic fluid / Fluido hidráulico					Brake fluid SAE J 1703																							
	Stroke / Carrera					35 mm																							
	Permissible medium / Medio de funcionamiento					Air / Aire																							
	Operating temperature range / Rango de temperatura					-40°C to / a +100°C																							
	Weight / Peso					2.3 kg																							
C								C																					
D	<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>11</td> <td>Air inlet / Entrada de aire</td> <td>M16x1.5</td> </tr> <tr> <td>1-4</td> <td>Hydraulic inlet / Entrada hidráulica</td> <td>M14x1.5</td> </tr> <tr> <td>31</td> <td>Air exhaust / Escape</td> <td>-</td> </tr> <tr> <td>32</td> <td>Bleed screw / Tornillo de purga</td> <td>-</td> </tr> <tr> <td>12</td> <td>Air inlet auxiliary / Entrada auxiliar de aire</td> <td>M12x1.5</td> </tr> <tr> <td>22</td> <td>Air delivery auxiliary / Salida auxiliar de aire</td> <td>M12x1.5</td> </tr> </tbody> </table>							Port / Conexión	Function / Función	Thread / Rosca	11	Air inlet / Entrada de aire	M16x1.5	1-4	Hydraulic inlet / Entrada hidráulica	M14x1.5	31	Air exhaust / Escape	-	32	Bleed screw / Tornillo de purga	-	12	Air inlet auxiliary / Entrada auxiliar de aire	M12x1.5	22	Air delivery auxiliary / Salida auxiliar de aire	M12x1.5	D
	Port / Conexión	Function / Función	Thread / Rosca																										
11	Air inlet / Entrada de aire	M16x1.5																											
1-4	Hydraulic inlet / Entrada hidráulica	M14x1.5																											
31	Air exhaust / Escape	-																											
32	Bleed screw / Tornillo de purga	-																											
12	Air inlet auxiliary / Entrada auxiliar de aire	M12x1.5																											
22	Air delivery auxiliary / Salida auxiliar de aire	M12x1.5																											
E	Purpose / Propósito: To reduce the clutch pedal effort and provide a mooth and precise clutch operation. / Reducir la fuerza del pedal del embrague y conseguir un funcionamiento suave y preciso del mismo.							E																					
F	Modification	4				Drawn		F																					
		3				07/10/20 J.S.																							
		2				Checked																							
		1				07/10/20 O.V.																							
		nº	Modified	Date	Reason	General Tolerance			Assembly	-																			
	Comments					-	Part name	Clutch servo / Servoembrague																					
						Material	ID. Reference	2550714																					
					-	Scale: -		Sheet 1/2																					
					-	Review: 0																							
PG/18/02 rev.1 1		2		3		4																							

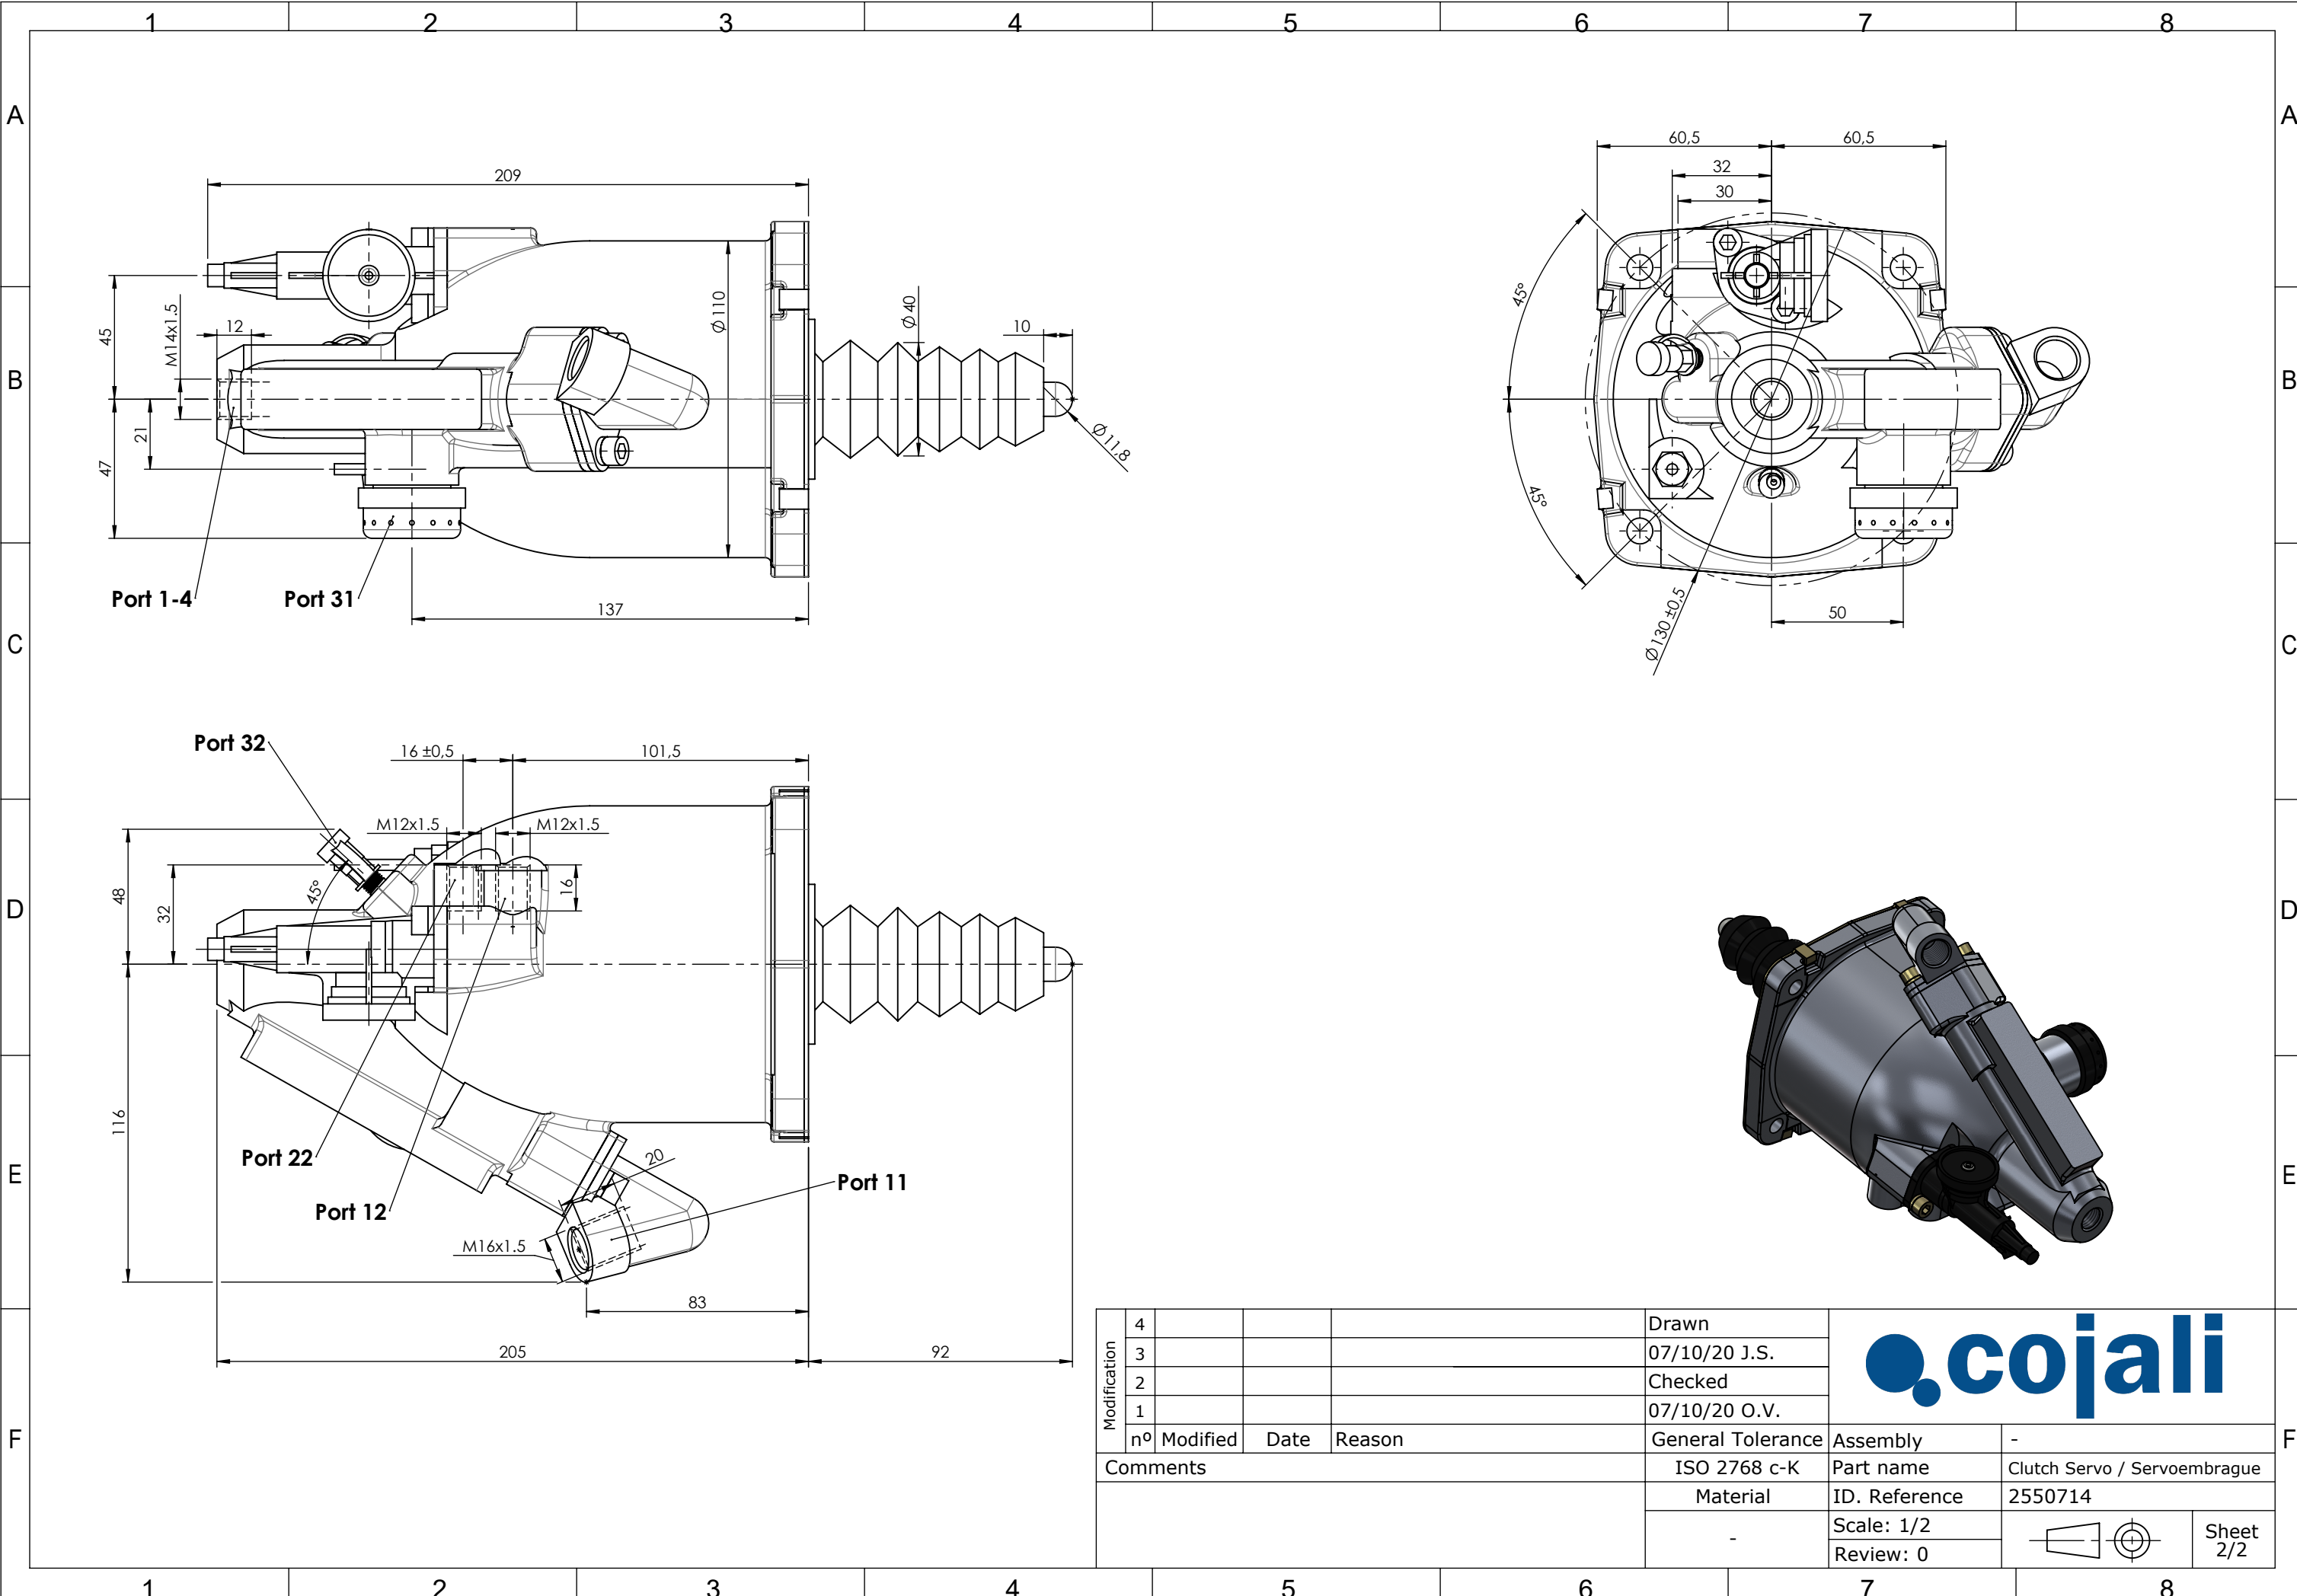

Modification	4				Drawn				
	3				07/10/20 J.S.				
	2				Checked				
	1				07/10/20 O.V.				
	nº	Modified	Date	Reason	General Tolerance	Assembly	-		
Comments					ISO 2768 c-K	Part name	Clutch Servo / Servoembrague		
					Material	ID. Reference	2550714		
					-	Scale: 1/2			Sheet 2/2
						Review: 0			