
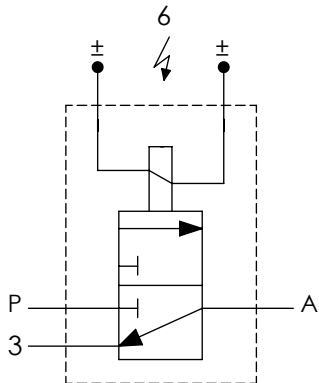
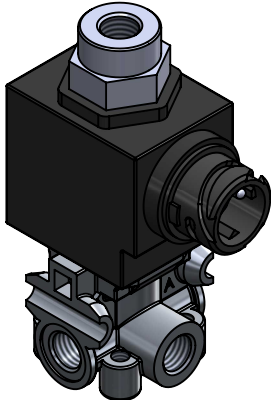



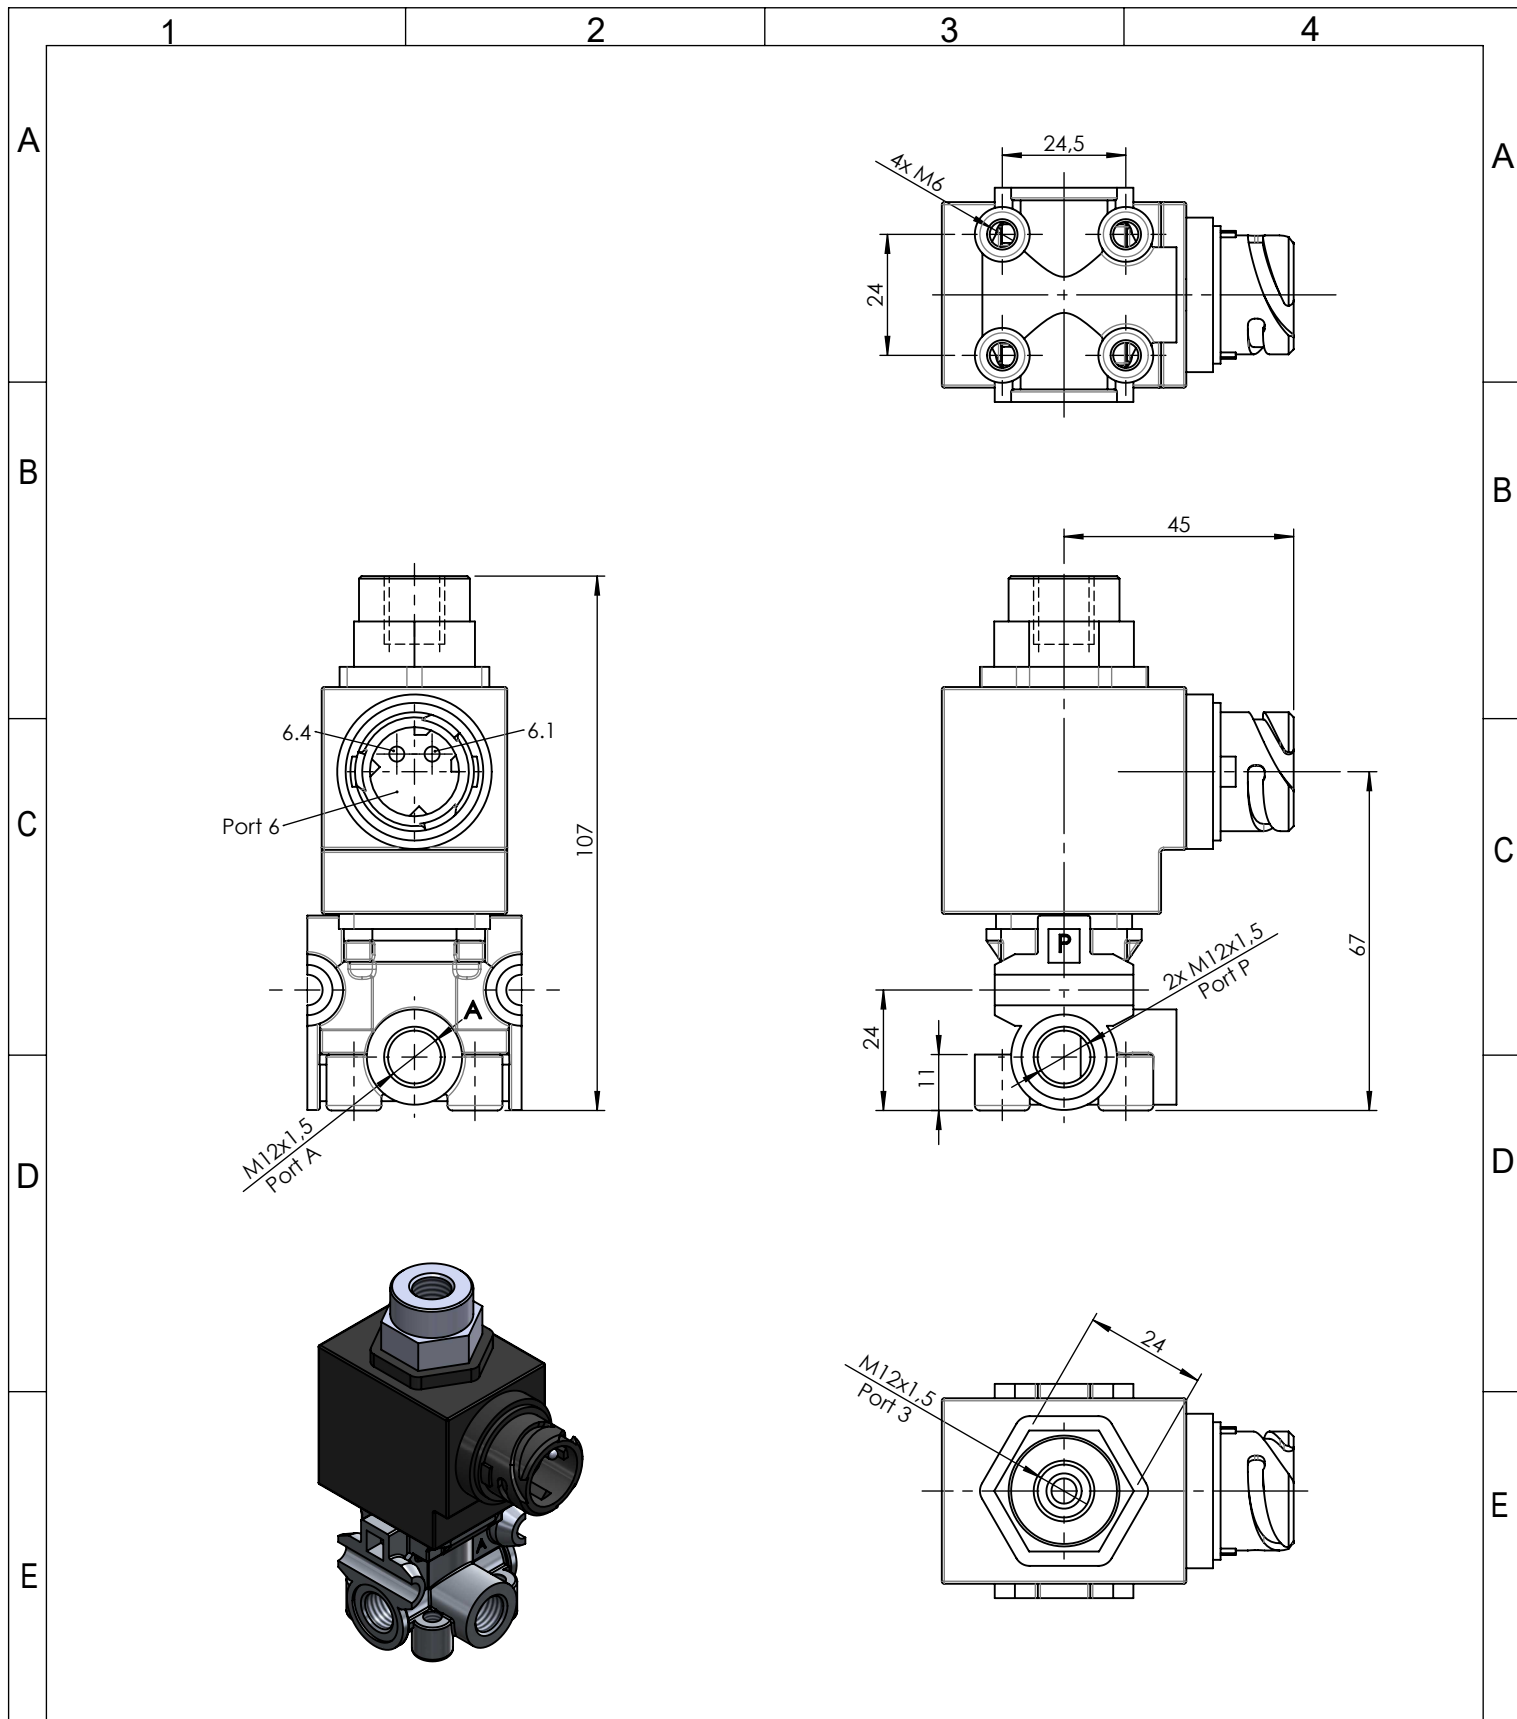


	1	2	3	4																																																													
A	Technical sheet / Datos técnicos:																																																																
	<table border="1"> <tr> <td>Part number adaptable to / Referencia adaptable a</td> <td>1078320</td> </tr> <tr> <td>Type of current / Tipo de corriente:</td> <td>Direct current / Corriente continua</td> </tr> <tr> <td>Voltage / Voltaje:</td> <td>24 V</td> </tr> <tr> <td>Permissible medium / Medio de funcionamiento</td> <td>Air / Aire</td> </tr> <tr> <td>Operating temperature range / Rango de temperatura</td> <td>-40 °C to / a +80 °C</td> </tr> <tr> <td>Weight / Peso</td> <td>400 gr</td> </tr> </table>				Part number adaptable to / Referencia adaptable a	1078320	Type of current / Tipo de corriente:	Direct current / Corriente continua	Voltage / Voltaje:	24 V	Permissible medium / Medio de funcionamiento	Air / Aire	Operating temperature range / Rango de temperatura	-40 °C to / a +80 °C	Weight / Peso	400 gr																																																	
Part number adaptable to / Referencia adaptable a	1078320																																																																
Type of current / Tipo de corriente:	Direct current / Corriente continua																																																																
Voltage / Voltaje:	24 V																																																																
Permissible medium / Medio de funcionamiento	Air / Aire																																																																
Operating temperature range / Rango de temperatura	-40 °C to / a +80 °C																																																																
Weight / Peso	400 gr																																																																
B																																																																	
C	 																																																																
D																																																																	
E	<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>P</td> <td>Supply / Alimentación</td> <td>2x M12x1,5</td> </tr> <tr> <td>A</td> <td>Delivery / Salida</td> <td>M12x1,5</td> </tr> <tr> <td>3</td> <td>Exhaust / Escape</td> <td>M12x1,5</td> </tr> <tr> <td>6</td> <td>Conector / Conector</td> <td>DIN 72585 A1-2</td> </tr> </tbody> </table> Purpose / Propósito: Allow air flow to delivery port when the solenoid is activated. / Permitir el paso de aire hacia la conexión de salida cuando se activa el solenoide. Installation requirements / Requisitos para la instalación: The valve must be installed using 4 screw M6. / La válvula debe ser instalada usando 4 tornillos M6.				Port / Conexión	Function / Función	Thread / Rosca	P	Supply / Alimentación	2x M12x1,5	A	Delivery / Salida	M12x1,5	3	Exhaust / Escape	M12x1,5	6	Conector / Conector	DIN 72585 A1-2																																														
Port / Conexión	Function / Función	Thread / Rosca																																																															
P	Supply / Alimentación	2x M12x1,5																																																															
A	Delivery / Salida	M12x1,5																																																															
3	Exhaust / Escape	M12x1,5																																																															
6	Conector / Conector	DIN 72585 A1-2																																																															
F	<table border="1"> <tr> <td rowspan="5">Modification</td> <td>4</td> <td></td> <td></td> <td></td> <td>Drawn</td> <td rowspan="5">  </td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td>18/06/20 S.F.</td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td>Checked</td> </tr> <tr> <td>1</td> <td></td> <td></td> <td></td> <td>18/06/20 O.V.</td> </tr> <tr> <td>nº</td> <td>Modified</td> <td>Date</td> <td>Reason</td> <td>General Tolerance</td> <td>Assembly</td> <td>-</td> </tr> <tr> <td colspan="5">Comments</td> <td>-</td> <td>Part name</td> <td>Solenoid</td> </tr> <tr> <td colspan="5"></td> <td>Material</td> <td>ID. Reference</td> <td>2880205</td> </tr> <tr> <td colspan="5"></td> <td>-</td> <td>Scale: -</td> <td rowspan="2">  </td> </tr> <tr> <td colspan="5"></td> <td>-</td> <td>Review: 0</td> <td>Sheet 1/2</td> </tr> </table>				Modification	4				Drawn		3				18/06/20 S.F.	2				Checked	1				18/06/20 O.V.	nº	Modified	Date	Reason	General Tolerance	Assembly	-	Comments					-	Part name	Solenoid						Material	ID. Reference	2880205						-	Scale: -							-	Review: 0	Sheet 1/2
Modification	4					Drawn																																																											
	3					18/06/20 S.F.																																																											
	2					Checked																																																											
	1					18/06/20 O.V.																																																											
	nº	Modified	Date	Reason	General Tolerance	Assembly		-																																																									
Comments					-	Part name	Solenoid																																																										
					Material	ID. Reference	2880205																																																										
					-	Scale: -																																																											
					-	Review: 0		Sheet 1/2																																																									
	PG/18/02 rev.1 1	2	3	4																																																													



F	Modification	4					Drawn			F
		3					18/06/20 S.F.			
		2					Checked			
		1					18/06/20 O.V.			
		nº	Modified	Date	Reason	General Tolerance	Assembly			
	Comments				ISO 2768 c-K	Part name	Solenoid			
					Material	ID. Reference	2880205			
-					Scale: 2/3		Sheet 2/2			
					Review: 0					
PG/18/02 rev.1 1				2	3	4				