
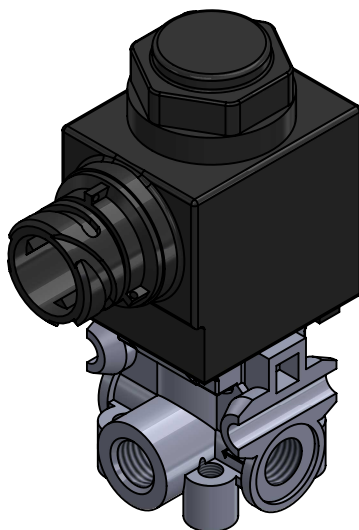
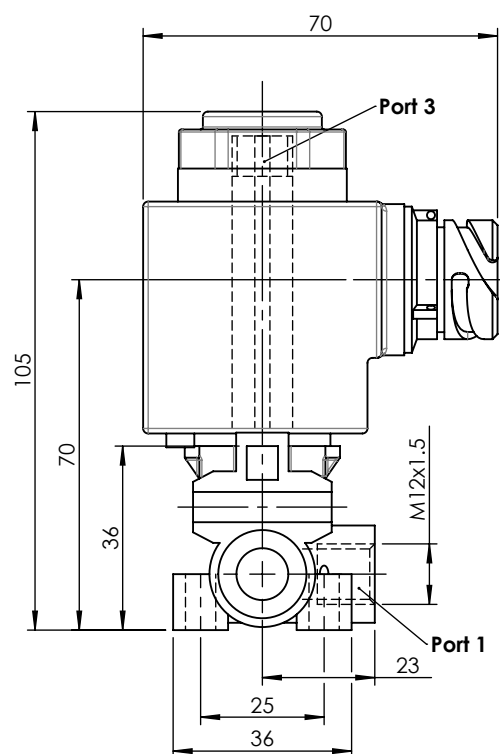


1		2		3		4																																																																						
A	Technical sheet / Datos técnicos:							A																																																																				
	<table border="1"> <tr> <td>Part number adaptable to / Referencia adaptable a</td> <td colspan="6">1078318</td> </tr> <tr> <td>Working pressure / Presión de trabajo</td> <td colspan="6">max. 8 bar</td> </tr> <tr> <td>Type of current / Tipo de corriente:</td> <td colspan="6">Direct current / Corriente continua</td> </tr> <tr> <td>Voltage / Voltaje:</td> <td colspan="6">24 V</td> </tr> <tr> <td>Nominal current / Corriente nominal:</td> <td colspan="6">0.6 A</td> </tr> <tr> <td>Permissible medium / Medio de funcionamiento</td> <td colspan="6">Air / Aire</td> </tr> <tr> <td>Operating temperature range / Rango de temperatura</td> <td colspan="6">-40°C to / a +80°C</td> </tr> <tr> <td>Weight / Peso</td> <td colspan="6">400 gr</td> </tr> </table>								Part number adaptable to / Referencia adaptable a	1078318						Working pressure / Presión de trabajo	max. 8 bar						Type of current / Tipo de corriente:	Direct current / Corriente continua						Voltage / Voltaje:	24 V						Nominal current / Corriente nominal:	0.6 A						Permissible medium / Medio de funcionamiento	Air / Aire						Operating temperature range / Rango de temperatura	-40°C to / a +80°C						Weight / Peso	400 gr																	
Part number adaptable to / Referencia adaptable a	1078318																																																																											
Working pressure / Presión de trabajo	max. 8 bar																																																																											
Type of current / Tipo de corriente:	Direct current / Corriente continua																																																																											
Voltage / Voltaje:	24 V																																																																											
Nominal current / Corriente nominal:	0.6 A																																																																											
Permissible medium / Medio de funcionamiento	Air / Aire																																																																											
Operating temperature range / Rango de temperatura	-40°C to / a +80°C																																																																											
Weight / Peso	400 gr																																																																											
B								B																																																																				
C								C																																																																				
D								D																																																																				
E	<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Supply / Alimentación</td> <td>M12x1.5</td> </tr> <tr> <td>2</td> <td>Delivery / Salida</td> <td>2x M12x1.5</td> </tr> <tr> <td>3</td> <td>Exhaust / Escape</td> <td>-</td> </tr> </tbody> </table>							Port / Conexión	Function / Función	Thread / Rosca	1	Supply / Alimentación	M12x1.5	2	Delivery / Salida	2x M12x1.5	3	Exhaust / Escape	-	E																																																								
	Port / Conexión	Function / Función	Thread / Rosca																																																																									
1	Supply / Alimentación	M12x1.5																																																																										
2	Delivery / Salida	2x M12x1.5																																																																										
3	Exhaust / Escape	-																																																																										
Purpose / Propósito: Allow air flows to delivery port when the solenoid is activated / Permitir el paso de aire hacia la conexión de salida cuando se activa el solenoide. Installation requirements / Requisitos para la instalación: The valve must be installed using 4 screws M6. MAKE sure the hand actuation is accesible/ La válvula debe ser instalada usando cuatro tornillos M6. Asegurarse de que la actuación manual se encuentra disponible.																																																																												
F	<table border="1"> <thead> <tr> <th rowspan="2">Modification nº</th> <th rowspan="2">Modified</th> <th rowspan="2">Date</th> <th rowspan="2">Reason</th> <th rowspan="2">General Tolerance</th> <th colspan="2">Assembly</th> </tr> <tr> <th>Part name</th> <th>ID. Reference</th> </tr> </thead> <tbody> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td>Drawn</td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td>09/09/20 J.S.</td> <td></td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td></td> <td>Checked</td> <td></td> </tr> <tr> <td>1</td> <td></td> <td></td> <td></td> <td></td> <td>09/09/20 O.V.</td> <td></td> </tr> <tr> <td colspan="5">Comments</td> <td>-</td> <td>Part name</td> <td>Solenoid</td> </tr> <tr> <td colspan="5"></td> <td>Material</td> <td>ID. Reference</td> <td>2880207</td> </tr> <tr> <td colspan="5"></td> <td>-</td> <td>Scale: -</td> <td rowspan="2"> </td> </tr> <tr> <td colspan="5"></td> <td>Review: 0</td> <td></td> </tr> </tbody> </table>							Modification nº	Modified	Date	Reason	General Tolerance	Assembly		Part name	ID. Reference	4					Drawn		3					09/09/20 J.S.		2					Checked		1					09/09/20 O.V.		Comments					-	Part name	Solenoid						Material	ID. Reference	2880207						-	Scale: -							Review: 0		F
Modification nº	Modified	Date	Reason	General Tolerance	Assembly																																																																							
					Part name	ID. Reference																																																																						
4					Drawn																																																																							
3					09/09/20 J.S.																																																																							
2					Checked																																																																							
1					09/09/20 O.V.																																																																							
Comments					-	Part name	Solenoid																																																																					
					Material	ID. Reference	2880207																																																																					
					-	Scale: -																																																																						
					Review: 0																																																																							
PG/18/02 rev.1 1		2		3		4																																																																						

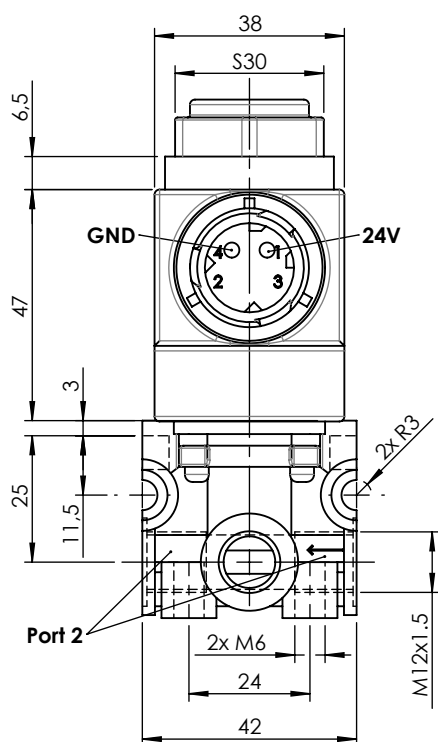

Modification	4					Drawn
	3					09/09/20 J.S.
	2					Checked
	1					09/09/20 O.V.
	nº	Modified	Date	Reason	General Tolerance	Assembly
Comments					ISO 2768 c-K	Part name
					Material	ID. Reference
					-	Scale: 2/3
						Review: 0

cojali