
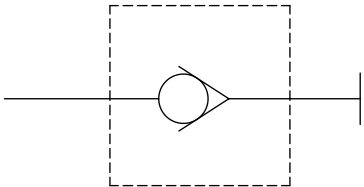
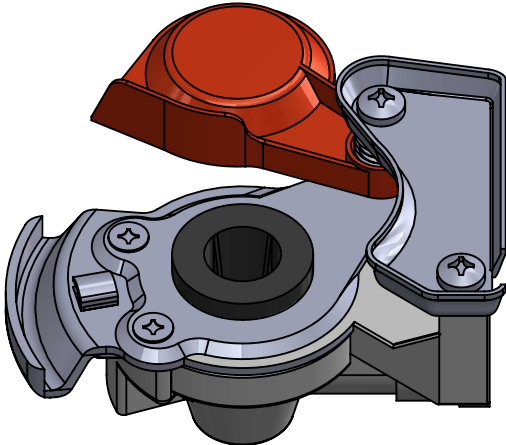



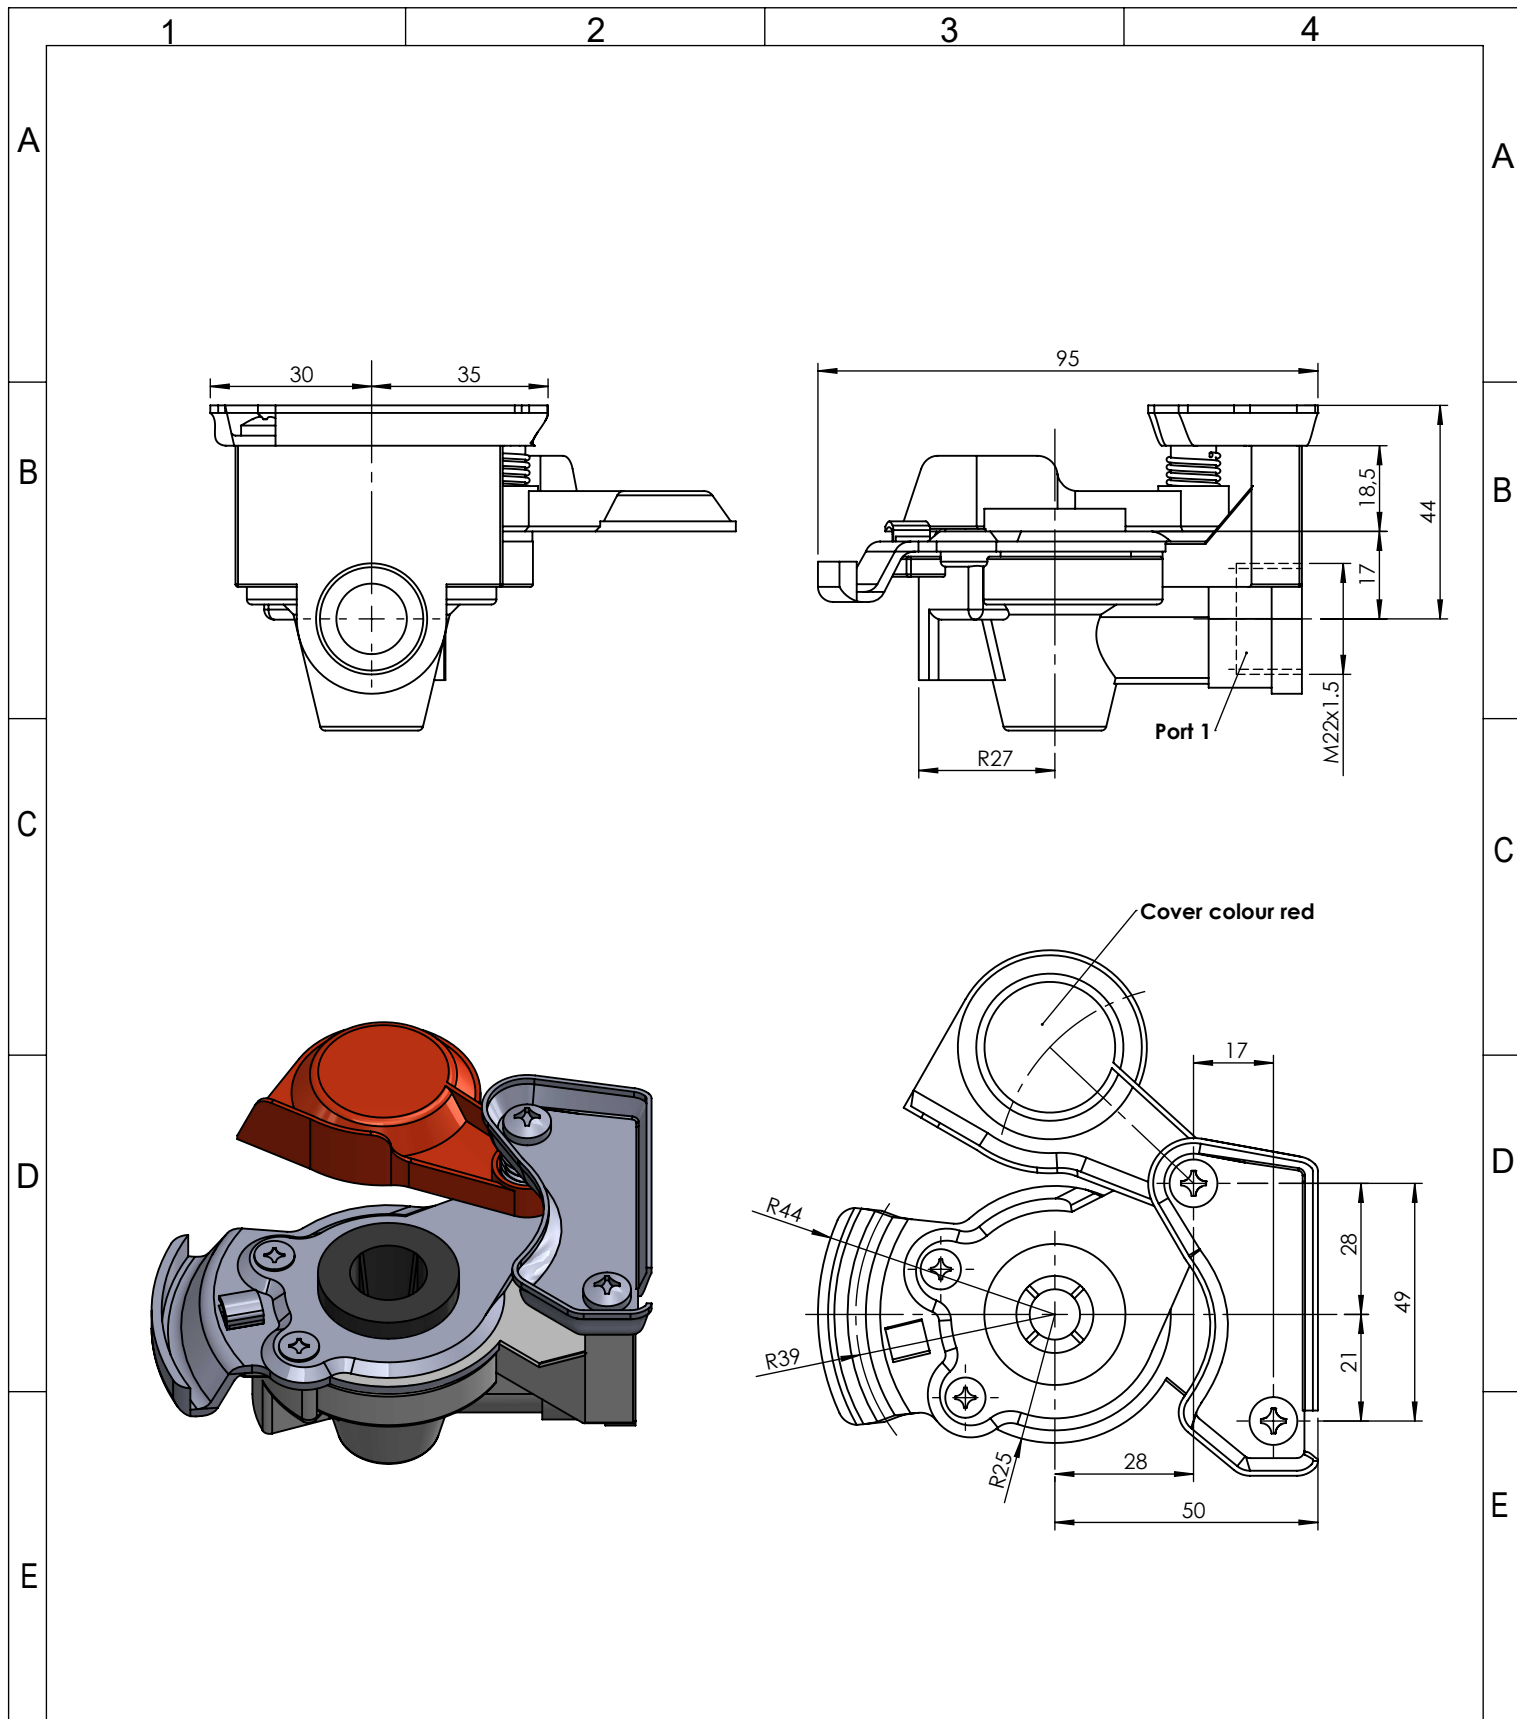


1	2	3	4																																																				
A	Technical sheet / Datos técnicos:			A																																																			
B	Part number adaptable to / Referencia adaptable a		4522002110	B																																																			
	Supply pressure / Presión de alimetación		max 10 bar																																																				
	Test coupling / Conexión de test		No																																																				
	Vehicle / Vehículo		Towing vehicle / Cabeza tractora																																																				
	Usage / Aplicación		Supply / Alimentación																																																				
	Integrated filter / Filtro integrado		No																																																				
	Complement / Complemento		6001401																																																				
	Permissible medium / Medio de funcionamiento		Air / Aire																																																				
	Operating temperature range / Rango de temperatura		-40 °C to / a +80 °C																																																				
Weight / Peso		260 gr																																																					
C				C																																																			
D	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:50%;">Port / Conexión</th> <th style="width:50%;">Thread / Rosca</th> </tr> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">M22x1.5</td> </tr> </table>		Port / Conexión	Thread / Rosca	1	M22x1.5			D																																														
Port / Conexión	Thread / Rosca																																																						
1	M22x1.5																																																						
E	Purpose / Propósito: To connect the pneumatic brake system of the truck or semi-trailer tractor with the trailer's brake system. / Conectar el sistema de frenado neumático del camión o del tractor de semirremolque con el sistema de frenado del remolque. Installation requirements / Requisitos para la instalación: To fit in accordance with the ISO 1728 standard. / Instalar según la norma ISO 1728.			E																																																			
F	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td rowspan="5" style="width:5%; text-align: center; vertical-align: middle;">Modification</td> <td style="width:5%; text-align: center;">4</td> <td style="width:15%;"></td> <td style="width:15%;"></td> <td style="width:15%;"></td> <td style="width:20%;">Drawn</td> <td rowspan="5" style="width:20%; text-align: center; vertical-align: middle;">  </td> </tr> <tr> <td style="text-align: center;">3</td> <td></td> <td></td> <td></td> <td>04/12/14 A.L-S.</td> </tr> <tr> <td style="text-align: center;">2</td> <td></td> <td></td> <td></td> <td>Checked</td> </tr> <tr> <td style="text-align: center;">1</td> <td></td> <td></td> <td></td> <td>04/12/14 A.L.</td> </tr> <tr> <td style="text-align: center;">nº</td> <td>Modified</td> <td>Date</td> <td>Reason</td> <td>General Tolerance</td> <td>Assembly</td> <td style="text-align: center;">-</td> </tr> <tr> <td colspan="5">Comments</td> <td style="text-align: center;">-</td> <td>Part name</td> <td>Coupling head</td> </tr> <tr> <td colspan="5" rowspan="3"></td> <td style="text-align: center;">Material</td> <td>ID. Reference</td> <td>6001405</td> </tr> <tr> <td style="text-align: center;">-</td> <td>Scale: -</td> <td rowspan="2" style="text-align: center;">  </td> <td rowspan="2" style="text-align: center;">Sheet 1/2</td> </tr> <tr> <td style="text-align: center;">-</td> <td>Review: 0</td> </tr> </table>			Modification	4				Drawn		3				04/12/14 A.L-S.	2				Checked	1				04/12/14 A.L.	nº	Modified	Date	Reason	General Tolerance	Assembly	-	Comments					-	Part name	Coupling head						Material	ID. Reference	6001405	-	Scale: -		Sheet 1/2	-	Review: 0	F
Modification	4					Drawn																																																	
	3					04/12/14 A.L-S.																																																	
	2					Checked																																																	
	1					04/12/14 A.L.																																																	
	nº	Modified	Date	Reason	General Tolerance	Assembly		-																																															
Comments					-	Part name	Coupling head																																																
					Material	ID. Reference	6001405																																																
					-	Scale: -		Sheet 1/2																																															
					-	Review: 0																																																	
PG/18/02 rev.1 1		2	3	4																																																			



F	Modification	4				Drawn		F
		3				04/12/14 A.L-S.		
		2				Checked		
		1				04/12/14 A.L.		
		nº	Modified	Date	Reason	General Tolerance		
	Comments				ISO 2768 c-K	Part name	Coupling head	
					Material	ID. Reference	6001405	
-					Scale: 2/3		Sheet 2/2	
					Review: 0			
PG/18/02 rev.1 1					2	3	4	