
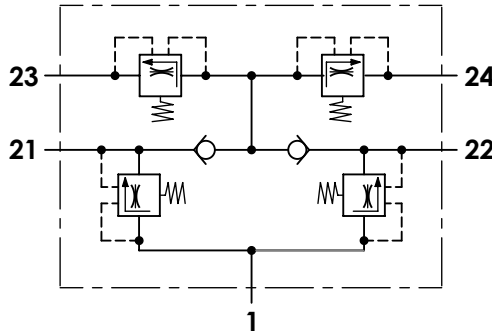




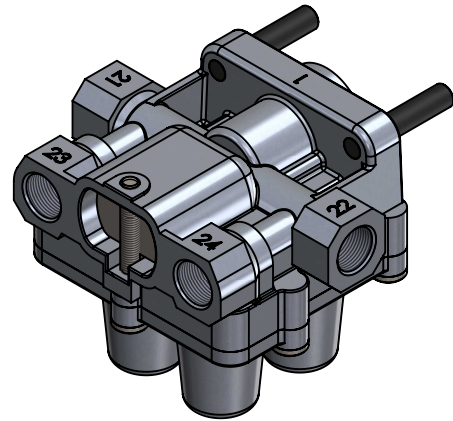
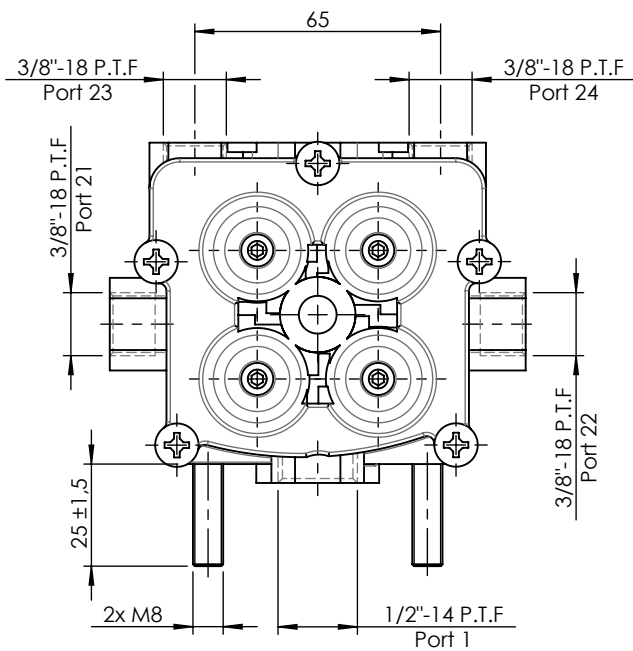
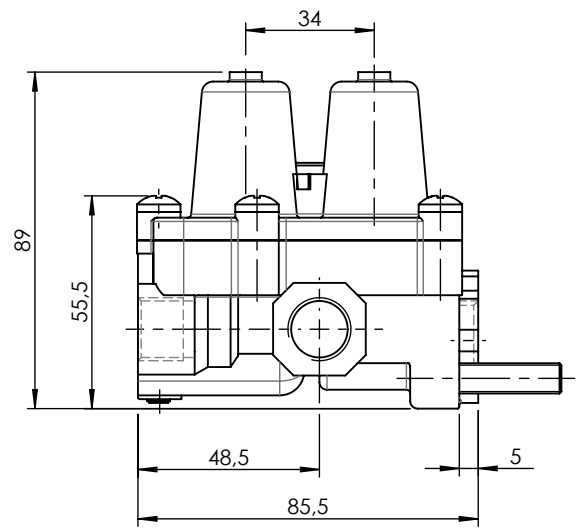
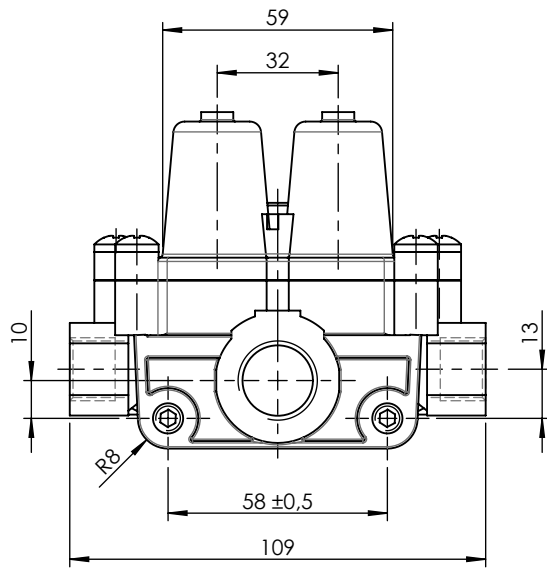


	1	2	3	4																																																													
Technical sheet / Datos técnicos:																																																																	
A	Part number adaptable to / Referencia adaptable a			9347140010																																																													
	Operating pressure / Presión de trabajo			max. 13 bar																																																													
	Permissible medium / Medio de funcionamiento			Air / Aire																																																													
	Operating temperature range / Rango de temperatura			-40°C to / a +90°C																																																													
	Weight / Peso			700 gr																																																													
B																																																																	
C	<table><tr><th>Port / Conexión</th><th>Function / Función</th><th>Thread / Rosca</th></tr><tr><td>1</td><td>Supply / Alimentación</td><td>1/2"-14 P.T.F</td></tr><tr><td>21</td><td>Delivery / Salida</td><td>3/8"-18 P.T.F</td></tr><tr><td>22</td><td>Delivery / Salida</td><td>3/8"-18 P.T.F</td></tr><tr><td>23</td><td>Delivery / Salida</td><td>3/8"-18 P.T.F</td></tr><tr><td>24</td><td>Delivery / Salida</td><td>3/8"-18 P.T.F</td></tr></table>				Port / Conexión	Function / Función	Thread / Rosca	1	Supply / Alimentación	1/2"-14 P.T.F	21	Delivery / Salida	3/8"-18 P.T.F	22	Delivery / Salida	3/8"-18 P.T.F	23	Delivery / Salida	3/8"-18 P.T.F	24	Delivery / Salida	3/8"-18 P.T.F																																											
Port / Conexión	Function / Función	Thread / Rosca																																																															
1	Supply / Alimentación	1/2"-14 P.T.F																																																															
21	Delivery / Salida	3/8"-18 P.T.F																																																															
22	Delivery / Salida	3/8"-18 P.T.F																																																															
23	Delivery / Salida	3/8"-18 P.T.F																																																															
24	Delivery / Salida	3/8"-18 P.T.F																																																															
D	<table><tr><th>Circuit / Circuito</th><th>1</th><th>2</th><th>3</th><th>4</th></tr><tr><th>Port / Conexión</th><td>21</td><td>22</td><td>23</td><td>24</td></tr><tr><th>Opening pressure / Presión de apertura (bar)</th><td colspan="2">6,4⁰_{-0,3}</td><td colspan="2">5,9⁰_{-0,3}</td></tr><tr><th>Closing pressure dynamic / Presión de cierre dinámica (bar)</th><td colspan="2">≥ 4,7</td><td colspan="2">≥ 4,1</td></tr></table>				Circuit / Circuito	1	2	3	4	Port / Conexión	21	22	23	24	Opening pressure / Presión de apertura (bar)	6,4 ⁰ _{-0,3}		5,9 ⁰ _{-0,3}		Closing pressure dynamic / Presión de cierre dinámica (bar)	≥ 4,7		≥ 4,1																																										
Circuit / Circuito	1	2	3		4																																																												
Port / Conexión	21	22	23	24																																																													
Opening pressure / Presión de apertura (bar)	6,4 ⁰ _{-0,3}		5,9 ⁰ _{-0,3}																																																														
Closing pressure dynamic / Presión de cierre dinámica (bar)	≥ 4,7		≥ 4,1																																																														
E	Purpose / Propósito: To distribute clean and dry air from the air dryer to different pneumatic circuits. Ensure pressure in brake circuits in case of leaks or breakage in any circuit./ Distribuir el aire limpio y seco proveniente del secador a los diferentes circuitos neumáticos. Asegurar la presión en los circuitos de freno en caso de fuga o rotura en cualquier circuito. Installation requirements / Requisitos para la instalación: The protection valve may be installed into the piping in any position. Mounting is accomplished by using two studs M8. / La válvula de protección puede instalarse en las tuberías en cualquier posición. El montaje se realiza mediante dos espárragos M8.																																																																
F	<table><tr><td rowspan="5">Modification nº</td><td>4</td><td></td><td></td><td></td><td>Drawn</td><td rowspan="4"></td></tr><tr><td>3</td><td></td><td></td><td></td><td>29/08/13 O.V.</td></tr><tr><td>2</td><td></td><td></td><td></td><td>Checked</td></tr><tr><td>1</td><td>J.S.</td><td>02/06/21</td><td>Change of sheet format</td><td>29/08/13 A.L.</td></tr><tr><td></td><td>Modified</td><td>Date</td><td>Reason</td><td>General Tolerance</td><td>Assembly</td><td>-</td></tr><tr><td colspan="5">Comments</td><td>-</td><td>Part name</td><td>Protection circuit valve</td></tr><tr><td colspan="5"></td><td>Material</td><td>ID. Reference</td><td>2222401</td></tr><tr><td colspan="5"></td><td>-</td><td>Scale: -</td><td rowspan="2"></td><td rowspan="2">Sheet 1/2</td></tr><tr><td colspan="5"></td><td>-</td><td>Review: 1</td></tr></table>			Modification nº	4				Drawn		3				29/08/13 O.V.	2				Checked	1	J.S.	02/06/21	Change of sheet format	29/08/13 A.L.		Modified	Date	Reason	General Tolerance	Assembly	-	Comments					-	Part name	Protection circuit valve						Material	ID. Reference	2222401						-	Scale: -		Sheet 1/2						-	Review: 1	
Modification nº	4					Drawn																																																											
	3					29/08/13 O.V.																																																											
	2					Checked																																																											
	1	J.S.	02/06/21		Change of sheet format	29/08/13 A.L.																																																											
		Modified	Date	Reason	General Tolerance	Assembly	-																																																										
Comments					-	Part name	Protection circuit valve																																																										
					Material	ID. Reference	2222401																																																										
					-	Scale: -		Sheet 1/2																																																									
					-	Review: 1																																																											
PG/18/02 rev.1 1		2	3	4																																																													



F	Modification	4				Drawn		
		3				29/08/13 O.V.		
		2				Checked		
		1	J.S.	02/06/21	Change of sheet format	29/08/13 A.L.		
		nº	Modified	Date	Reason	General Tolerance	Assembly	-
Comments				ISO 2768 c-K	Part name	Protection circuit valve		
				Material	ID. Reference	2222401		
				-	Scale: 1/2		Sheet 2/2	
					Review: 1			