

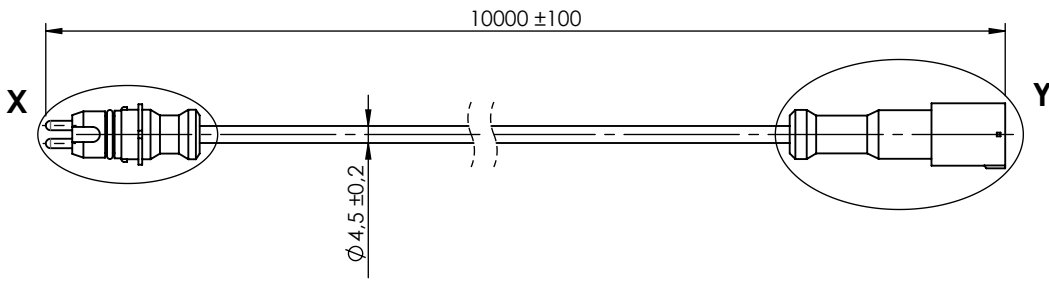
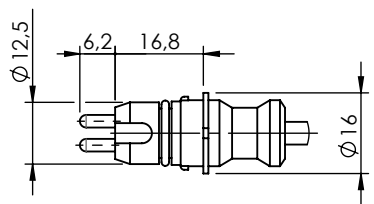






	1	2	3	4																																																									
A	Technical sheet / Datos técnicos:																																																												
	Part number adaptable to / Referencia adaptable a		II3675610000																																																										
	Operating temperature range / Rango de temperatura		-40°C to / a +80°C																																																										
	Weight / Peso		280 gr																																																										
B	<table border="1"> <tr> <th colspan="2">Continuity between pins / Continuidad entre pines</th> </tr> <tr> <th>2 pin connector - male</th> <th>2 pin connector - female</th> </tr> <tr> <td>X1</td> <td>Y2</td> </tr> <tr> <td>X2</td> <td>Y1</td> </tr> </table>				Continuity between pins / Continuidad entre pines		2 pin connector - male	2 pin connector - female	X1	Y2	X2	Y1																																																	
	Continuity between pins / Continuidad entre pines																																																												
	2 pin connector - male	2 pin connector - female																																																											
	X1	Y2																																																											
X2	Y1																																																												
																																																													
	 SCALE / ESCALA 1 : 1  SCALE / ESCALA 1 : 1																																																												
																																																													
E	 DETAIL / DETALLE X SCALE / ESCALA 2 : 3  DETAIL / DETALLE Y SCALE / ESCALA 2 : 3																																																												
F	<table border="1"> <tr> <td rowspan="4">Modification</td> <td>4</td> <td></td> <td></td> <td></td> <td>Drawn</td> <td rowspan="4">  </td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td>21/11/18 J.S.</td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td>Checked</td> </tr> <tr> <td>1</td> <td></td> <td></td> <td></td> <td>21/11/18 O.V.</td> </tr> <tr> <td>nº</td> <td>Modified</td> <td>Date</td> <td>Reason</td> <td>General Tolerance</td> <td>Assembly</td> <td>-</td> </tr> <tr> <td colspan="4">Comments</td> <td>ISO 2768 c-K</td> <td>Part name</td> <td>Speed sensor cable</td> </tr> <tr> <td colspan="4"></td> <td>Material</td> <td>ID. Reference</td> <td>2261218</td> </tr> <tr> <td colspan="4"></td> <td>-</td> <td>Scale: 1/2</td> <td rowspan="2">  </td> </tr> <tr> <td colspan="4"></td> <td>-</td> <td>Review: 0</td> <td>Sheet 1/1</td> </tr> </table>				Modification	4				Drawn		3				21/11/18 J.S.	2				Checked	1				21/11/18 O.V.	nº	Modified	Date	Reason	General Tolerance	Assembly	-	Comments				ISO 2768 c-K	Part name	Speed sensor cable					Material	ID. Reference	2261218					-	Scale: 1/2						-	Review: 0	Sheet 1/1
	Modification	4					Drawn																																																						
		3					21/11/18 J.S.																																																						
		2					Checked																																																						
		1				21/11/18 O.V.																																																							
	nº	Modified	Date	Reason	General Tolerance	Assembly	-																																																						
	Comments				ISO 2768 c-K	Part name	Speed sensor cable																																																						
				Material	ID. Reference	2261218																																																							
				-	Scale: 1/2																																																								
				-	Review: 0		Sheet 1/1																																																						