
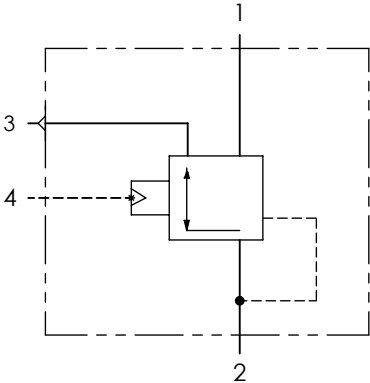
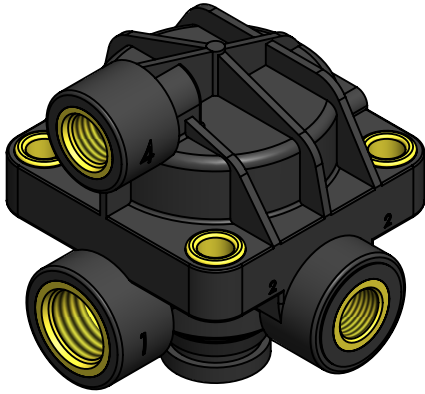





	1	2	3	4																																																																	
A	Technical sheet / Datos técnicos:																																																																				
B	Part number adaptable to / Referencia adaptable a			9730060000																																																																	
	Operating pressure / Presión de trabajo			max. 10 bar																																																																	
	Predominance / Predominancia			max. 0.2 bar																																																																	
	Permissible medium / Medio de funcionamiento			Air / Aire																																																																	
	Operating temperature range / Rango de temperatura			-40 °C to / a +80 °C																																																																	
B	Weight / Peso			400 gr																																																																	
C																																																																					
D	<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Supply / Alimentación</td> <td>M22x1.5</td> </tr> <tr> <td>2</td> <td>Delivery / Salida</td> <td>2x M16x1.5</td> </tr> <tr> <td>3</td> <td>Exhaust / Escape</td> <td>-</td> </tr> <tr> <td>4</td> <td>Control / Pilotaje</td> <td>M16x1.5</td> </tr> </tbody> </table>				Port / Conexión	Function / Función	Thread / Rosca	1	Supply / Alimentación	M22x1.5	2	Delivery / Salida	2x M16x1.5	3	Exhaust / Escape	-	4	Control / Pilotaje	M16x1.5																																																		
Port / Conexión	Function / Función	Thread / Rosca																																																																			
1	Supply / Alimentación	M22x1.5																																																																			
2	Delivery / Salida	2x M16x1.5																																																																			
3	Exhaust / Escape	-																																																																			
4	Control / Pilotaje	M16x1.5																																																																			
E	Purpose / Propósito: To rapidly supply and evacuate compressed air from pneumatic equipment and reduce response time of pneumatic braking systems. / Suministrar y evacuar rápidamente aire comprimido de equipos neumáticos y reducir el tiempo de respuesta de estos equipos.																																																																				
	Installation requirements / Requisitos para la instalación: Mounting is accomplished using four M8 screws. / El montaje se realiza usando cuatro tornillos M8.																																																																				
F	<table border="1"> <thead> <tr> <th rowspan="2">Modification nº</th> <th rowspan="2">Modified</th> <th rowspan="2">Date</th> <th rowspan="2">Reason</th> <th rowspan="2">General Tolerance</th> <th colspan="2"></th> </tr> <tr> <th>Assembly</th> <th>-</th> </tr> </thead> <tbody> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td>Drawn</td> <td rowspan="4">  </td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td>27/10/20 S.F.</td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td></td> <td>Checked</td> </tr> <tr> <td>1</td> <td></td> <td></td> <td></td> <td></td> <td>27/10/20 O.V.</td> </tr> <tr> <td colspan="5">Comments</td> <td>-</td> <td>Part name</td> <td>Relay valve</td> </tr> <tr> <td colspan="5"></td> <td>Material</td> <td>ID. Reference</td> <td>2226500</td> </tr> <tr> <td colspan="5"></td> <td>-</td> <td>Scale: -</td> <td rowspan="2">  </td> </tr> <tr> <td colspan="5"></td> <td>-</td> <td>Review: 0</td> </tr> </tbody> </table>				Modification nº	Modified	Date	Reason	General Tolerance			Assembly	-	4					Drawn		3					27/10/20 S.F.	2					Checked	1					27/10/20 O.V.	Comments					-	Part name	Relay valve						Material	ID. Reference	2226500						-	Scale: -							-	Review: 0
Modification nº	Modified	Date	Reason	General Tolerance																																																																	
					Assembly	-																																																															
4					Drawn																																																																
3					27/10/20 S.F.																																																																
2					Checked																																																																
1					27/10/20 O.V.																																																																
Comments					-	Part name	Relay valve																																																														
					Material	ID. Reference	2226500																																																														
					-	Scale: -																																																															
					-	Review: 0																																																															
PG/18/02 rev.1 1		2	3	4																																																																	

1 2 3 4


A

A

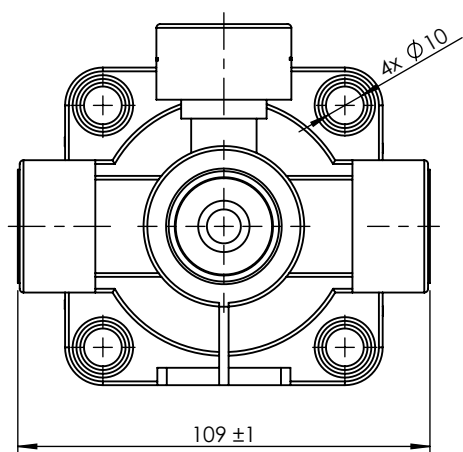


B

B

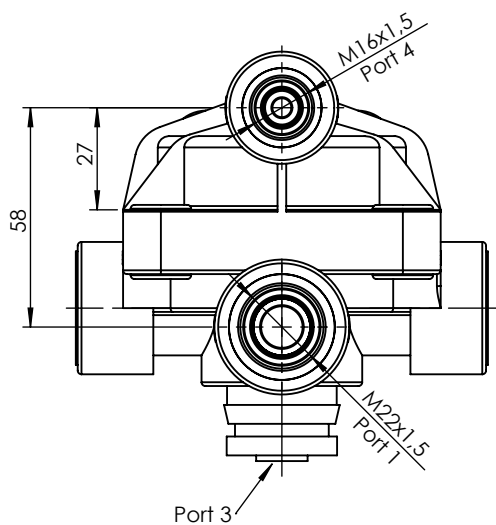


C

C

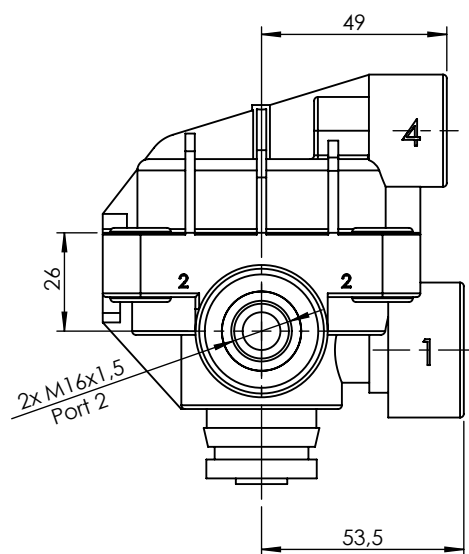


D

D

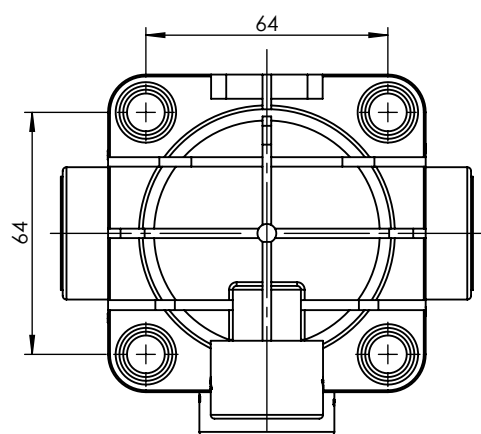


E

E

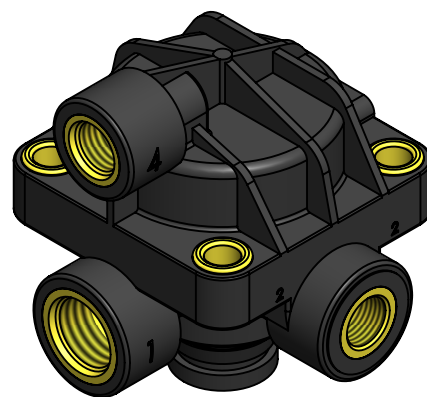

F

F

Modification	4					Drawn		
	3					27/10/20 S.F.		
	2					Checked		
	1					27/10/20 O.V.		
	nº	Modified	Date	Reason	General Tolerance	Assembly	-	
Comments				ISO 2768 c-K	Part name	Relay valve		
				Material	ID. Reference	2226500		
				-	Scale: 2/3			
					Review: 0			
						Sheet 2/2		