
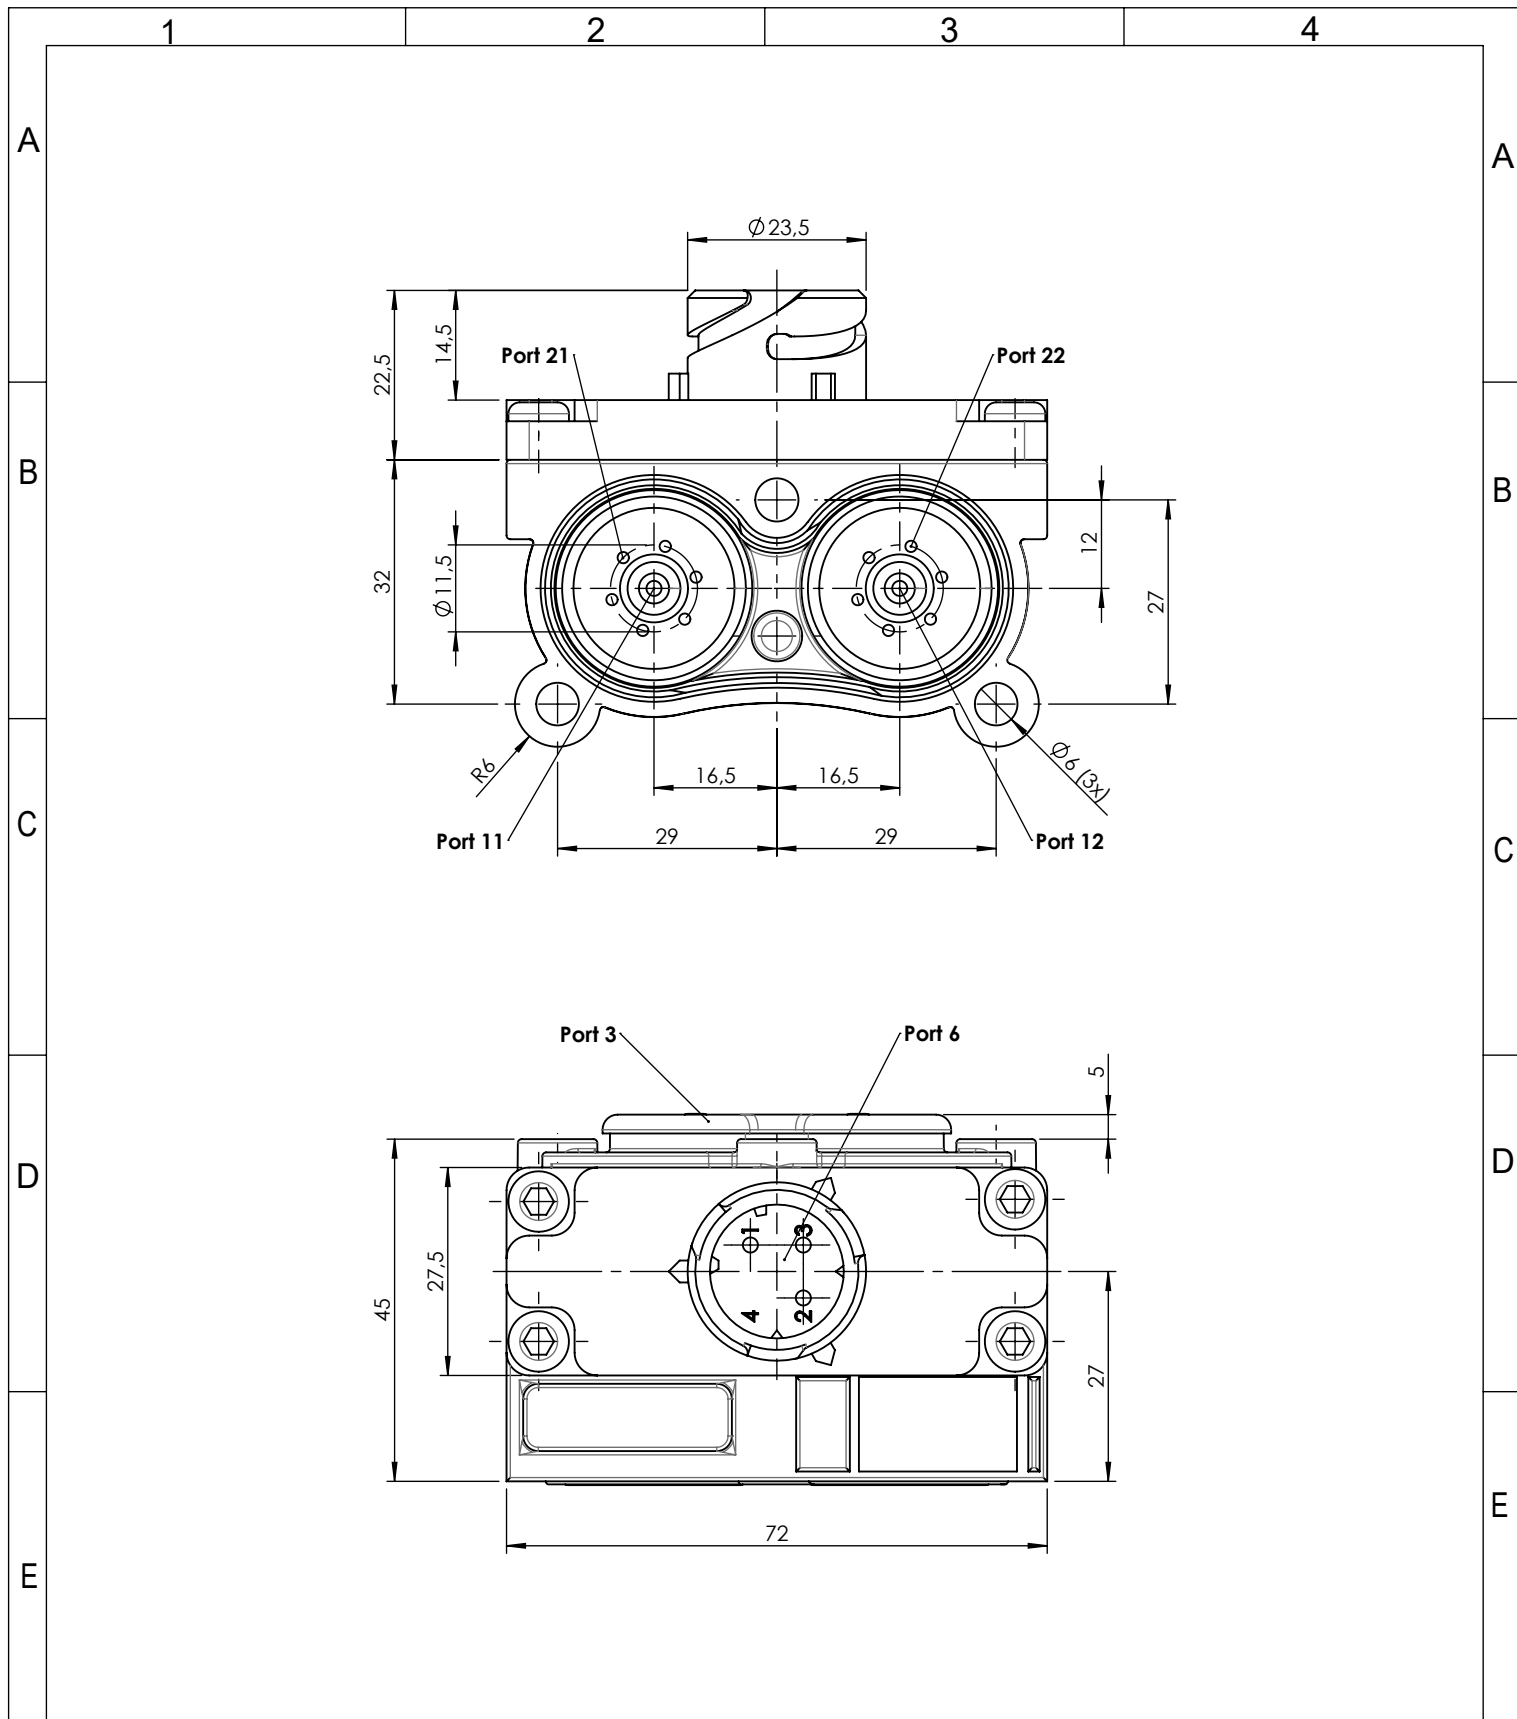


1		2		3		4																						
Technical sheet / Datos técnicos:																												
Part number adaptable to / Referencia adaptable a				A9452601957																								
Operating pressure / Presión de trabajo				max. 8 bar																								
Type of current / Tipo de corriente				Direct current / Corriente continua																								
Voltage / Voltaje				24 V																								
Permissible medium / Medio de funcionamiento				Air / Aire																								
Operating temperature range / Rango de temperatura				-40°C to / a +80°C																								
Weight / Peso				350 gr																								
<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>11</td> <td>Supply / Alimentación</td> <td>Ø2 mm</td> </tr> <tr> <td>12</td> <td>Supply / Alimentación</td> <td>Ø2 mm</td> </tr> <tr> <td>21</td> <td>Delivery / Salida</td> <td>6x Ø1,5 mm</td> </tr> <tr> <td>22</td> <td>Delivery / Salida</td> <td>6x Ø1,5 mm</td> </tr> <tr> <td>3</td> <td>Exhaust / Escape</td> <td>-</td> </tr> <tr> <td>6</td> <td>Electrical connection / Conexión eléctrica</td> <td>Bayonet DIN 72585 A1-3</td> </tr> </tbody> </table>								Port / Conexión	Function / Función	Thread / Rosca	11	Supply / Alimentación	Ø2 mm	12	Supply / Alimentación	Ø2 mm	21	Delivery / Salida	6x Ø1,5 mm	22	Delivery / Salida	6x Ø1,5 mm	3	Exhaust / Escape	-	6	Electrical connection / Conexión eléctrica	Bayonet DIN 72585 A1-3
Port / Conexión	Function / Función	Thread / Rosca																										
11	Supply / Alimentación	Ø2 mm																										
12	Supply / Alimentación	Ø2 mm																										
21	Delivery / Salida	6x Ø1,5 mm																										
22	Delivery / Salida	6x Ø1,5 mm																										
3	Exhaust / Escape	-																										
6	Electrical connection / Conexión eléctrica	Bayonet DIN 72585 A1-3																										
Purpose / Propósito: Solenoid valve 3/2 installed into a gearbox to actuate different functions. / Electroválvula 3/2 vías montada en la caja de cambios para accionar diferentes funcionalidades.																												
Installation requirements / Requisitos para la instalación: Mounting is accomplished with three screws M6. / El montaje se realiza mediante tres tornillos M6.																												
F	Modification	4				Drawn																						
		3				06/11/20 J.S.																						
		2				Checked																						
		1				06/11/20 O.V.																						
		nº	Modified	Date	Reason	General Tolerance		Assembly	-																			
Comments					-	Part name	Solenoid valve																					
					Material	ID. Reference	2880199																					
					-	Scale: -																						
					-	Review: 0		Sheet 1/2																				
PG/18/02 rev.1 1		2		3		4																						



F	Modification	4					Drawn		F
		3					06/11/20 J.S.		
		2					Checked		
		1					06/11/20 O.V.		
		nº	Modified	Date	Reason	General Tolerance	Assembly		
	Comments				ISO 2768 c-K	Part name	Solenoid valve		
					Material	ID. Reference	2880199		
-					Scale: 1/1		Sheet 2/2		
					Review: 0				
PG/18/02 rev.1 1			2		3		4		