
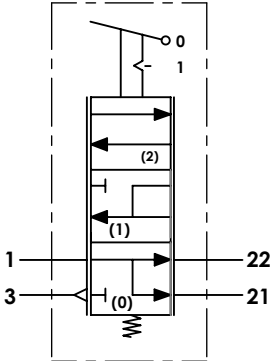
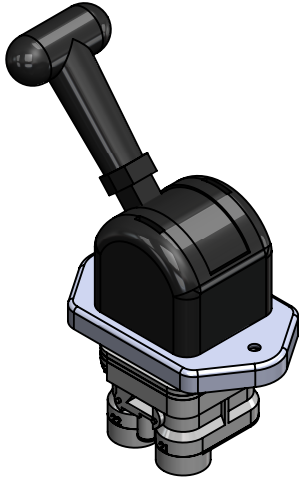

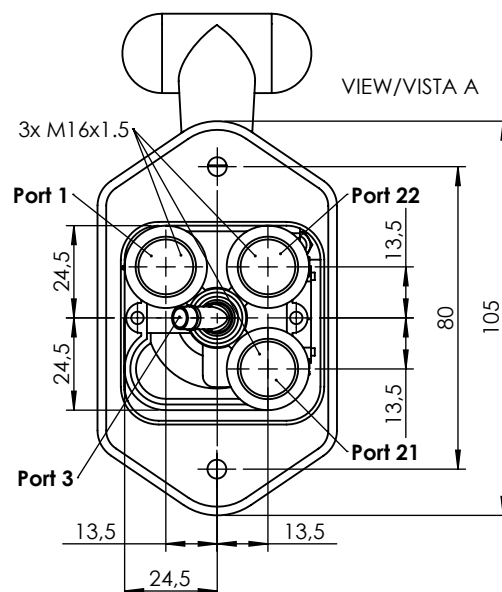
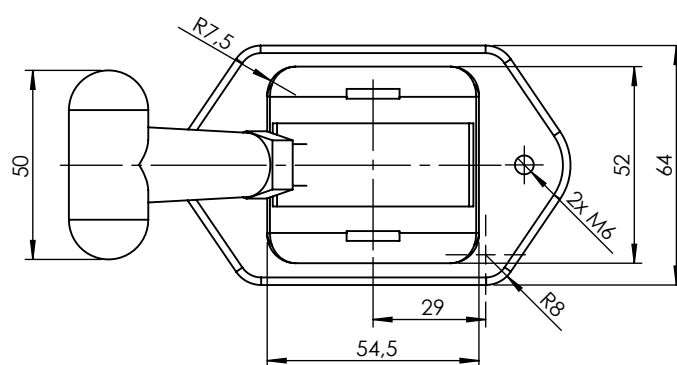
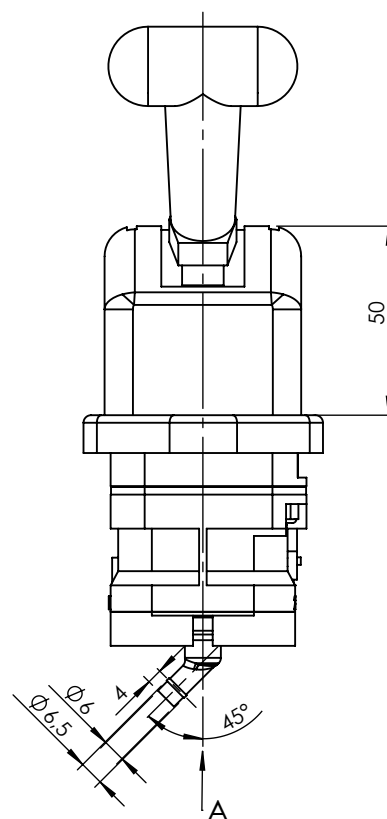
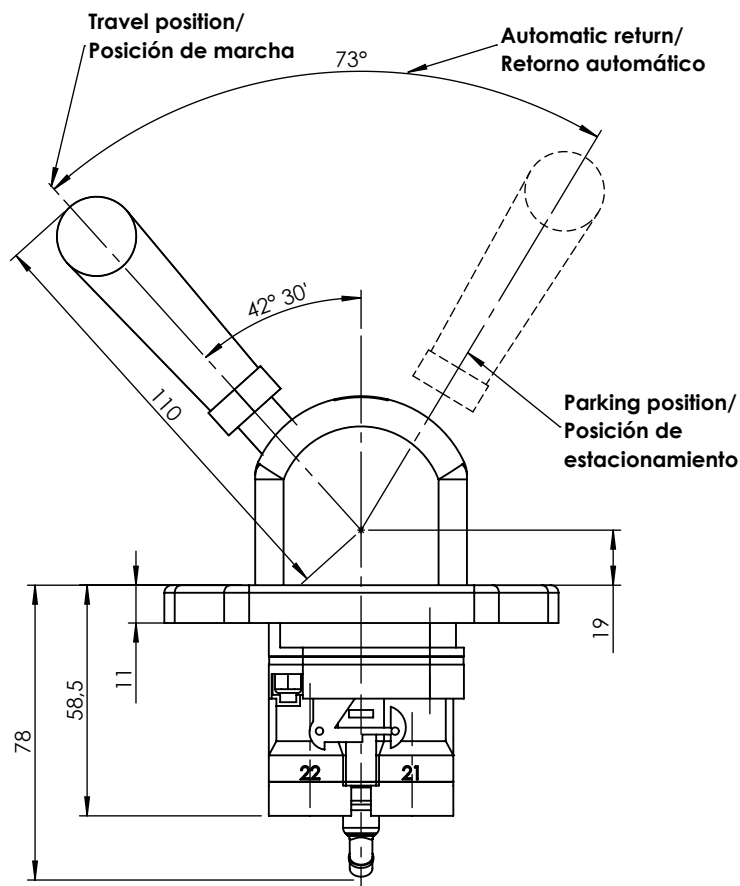


1		2		3		4																	
A	Technical sheet / Datos técnicos:							A															
B	Part number adaptable to / Referencia adaptable a					9617232150		B															
	Operating pressure / Presión de trabajo					max. 10 bar																	
	Actuation angle / Ángulo de accionamiento					73°																	
	Permissible medium / Medio de funcionamiento					Air / Aire																	
	Operating temperature range / Rango de temperatura					-40°C to / a +80°C																	
Weight / Peso					600 gr																		
C	 							C															
D	<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Supply / Alimentación</td> <td>M16x1.5</td> </tr> <tr> <td>21</td> <td>Delivery to relay valve / Salida a válvula relé</td> <td>M16x1.5</td> </tr> <tr> <td>22</td> <td>Delivery to trailer control valve / Salida a válvula control remolque</td> <td>M16x1.5</td> </tr> <tr> <td>3</td> <td>Exhaust / Escape</td> <td>-</td> </tr> </tbody> </table>							Port / Conexión	Function / Función	Thread / Rosca	1	Supply / Alimentación	M16x1.5	21	Delivery to relay valve / Salida a válvula relé	M16x1.5	22	Delivery to trailer control valve / Salida a válvula control remolque	M16x1.5	3	Exhaust / Escape	-	D
	Port / Conexión	Function / Función	Thread / Rosca																				
	1	Supply / Alimentación	M16x1.5																				
	21	Delivery to relay valve / Salida a válvula relé	M16x1.5																				
	22	Delivery to trailer control valve / Salida a válvula control remolque	M16x1.5																				
3	Exhaust / Escape	-																					
E	Purpose / Propósito: Parking braking actuation due to pressure release of spring brakes actuators. / Accionamiento del freno de estacionamiento gracias al alivio de la presión en las cámaras de muelle de los actuadores de freno. Installation requirements / Requisitos para la instalación: The valve is fastened using two screws M6. / La válvula es fijada usando dos tornillos M6.							E															
F	Modification	4				Drawn		F															
		3				09/09/15 A.U.																	
		2				Checked																	
		1				09/09/15 A.L.																	
		nº	Modified	Date	Reason	General Tolerance			Assembly	-													
	Comments					-	Part name	Hand brake valve															
						Material	ID. Reference	2224553															
						-	Scale: -																
						-	Review: 0		Sheet 1/2														
	PG/18/02 rev.1 1		2		3		4																



Modification	4					Drawn		
	3					09/09/15 A.U.		
	2					Checked		
	1					09/09/15 A.L.		
	nº	Modified	Date	Reason	General Tolerance	Assembly	-	
Comments					ISO 2768 c-K	Part name	Hand brake valve	
					Material	ID. Reference	2224553	
					-	Scale: 1/2		Sheet 2/2
						Review: 0		