

1


2


3

4

Technical sheet / Datos técnicos:

Part number adaptable to / Referencia adaptable a	AE4462
Operating pressure / Presión de trabajo	max. 20 bar
Permissible medium / Medio de funcionamiento	Air / Aire
Operating temperature range / Rango de temperatura	-40°C to / a +80°C
Weight / Peso	800 gr

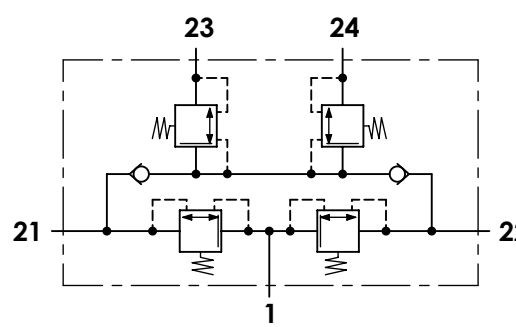




Port / Conexión	Function / Función	Thread / Rosca
1	Supply / Alimentación	M22x1,5
21	Delivery / Salida	M16x1,5
22	Delivery / Salida	M16x1,5
23	Delivery / Salida	M16x1,5
24	Delivery / Salida	M16x1,5

Circuit / Circuito	1	2	3	4
Port / Conexión	21	22	23	24
Opening pressure / Presión de apertura (bar)	5,6 ^{+0,3} ₀		5,6 ^{+0,3} ₀	
Closing pressure static / Presión de cierre estática (bar)	4,8 ⁰ _{-0,3}		4,8 ⁰ _{-0,3}	

Purpose / Propósito:
To distribute clean and dry air from the air dryer to different pneumatic circuits. Ensure pressure in brake circuits in case of leaks or breakage in any circuit. / Distribuir el aire limpio y seco proveniente del secador a los diferentes circuitos neumáticos. Asegurar la presión en los circuitos de freno en caso de fuga o rotura en cualquier circuito.

Installation requirements / Requisitos para la instalación:
The protection valve may be installed into the piping in any position. Mounting is accomplished by using two screws M8. / La válvula de protección puede instalarse en las tuberías en cualquier posición. El montaje se realiza mediante dos tornillos M8.





Modification	4				Drawn	
	3				30/08/13 C.P.	
	2				Checked	
	1	J.S.	02/06/21	Change of sheet format	30/08/13 A.L.	
	nº	Modified	Date	Reason	General Tolerance	
F					Assembly	-
	Comments				Part name	Protection circuit valve
					Material	ID. Reference
					-	Scale: -
					Review: 1	 Sheet 1/2


PG/18/02 rev.1 1

2

3

4

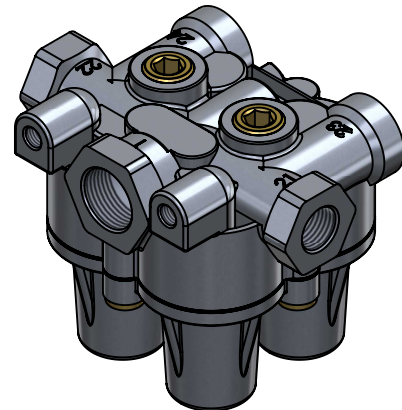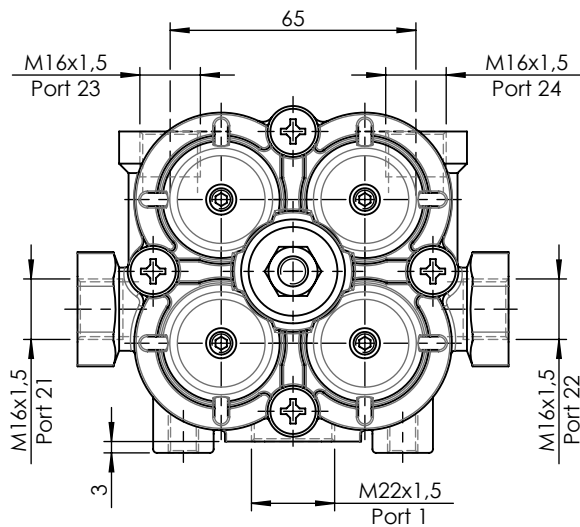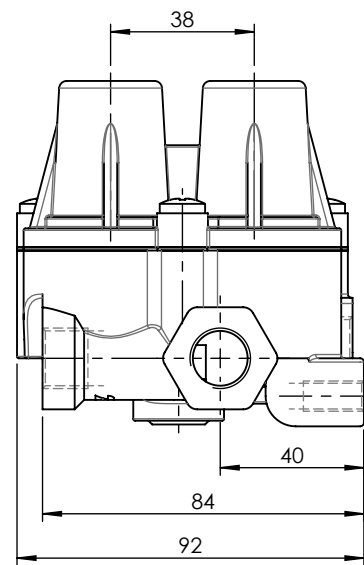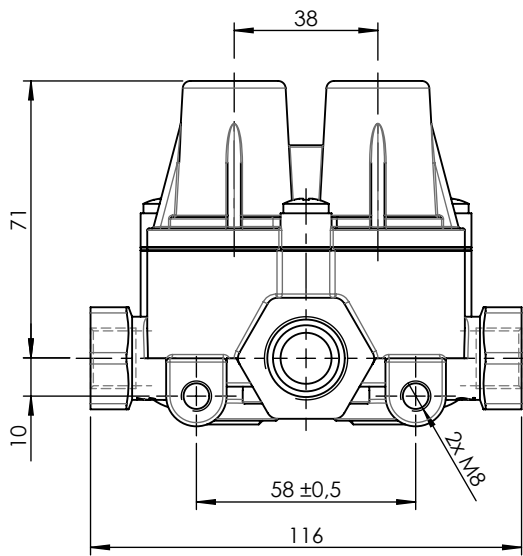

F	Modification	4				Drawn		
		3				30/08/13 C.P.		
		2				Checked		
		1	J.S.	02/06/21	Change of sheet format	30/08/13 A.L.		
		nº	Modified	Date	Reason	General Tolerance		
	Comments					ISO 2768 c-K	Part name	Protection circuit valve
						Material	ID. Reference	2322422
-						Scale: 1/2		Sheet 2/2
						Review: 1		
PG/18/02 rev.1 1			2		3		4	