
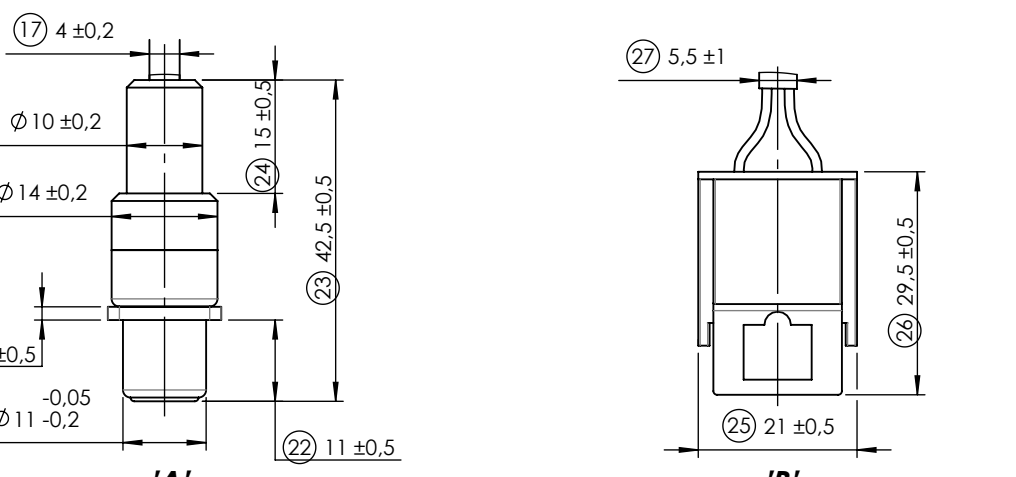
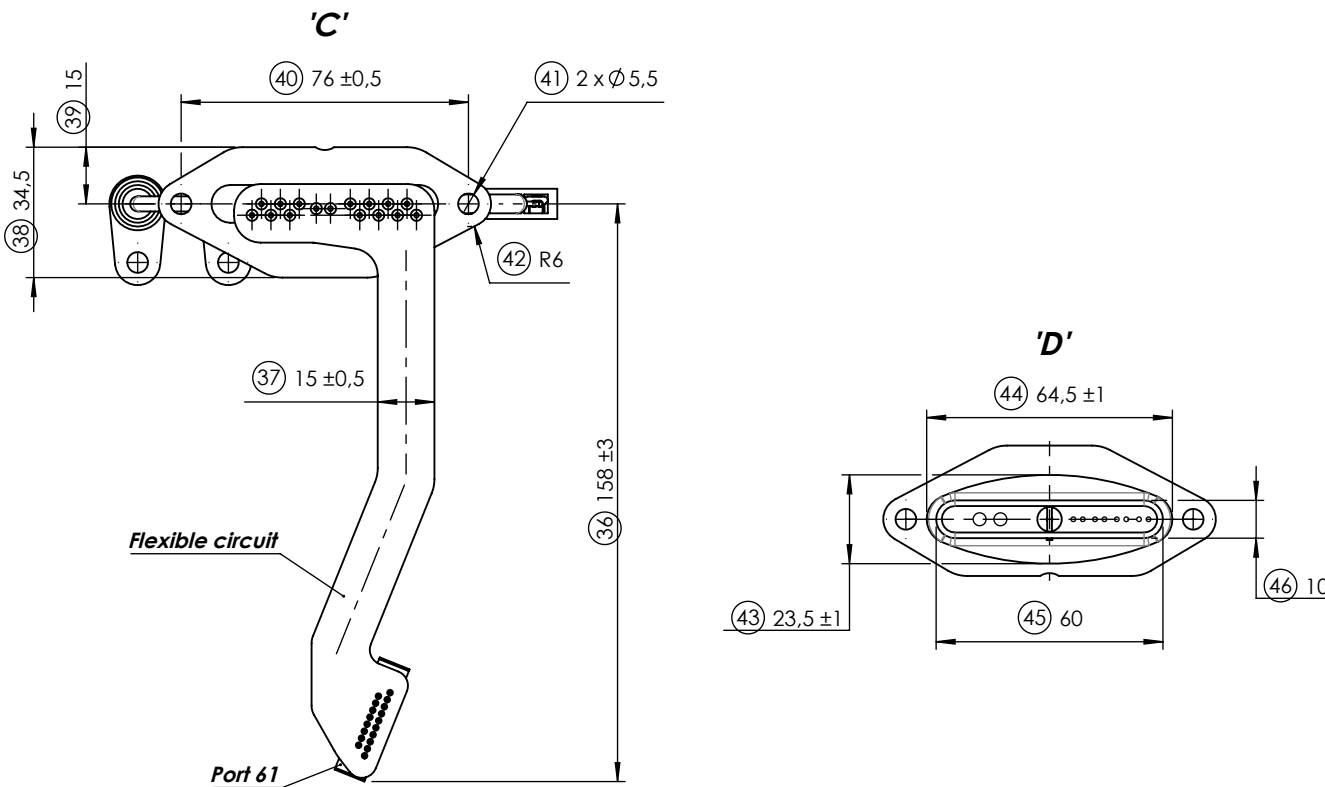


Technical data / Datos técnicos:

Weight / Peso	146 g
---------------	-------


Port	Description / Descripción	Characteristics / Características
61	Main connector / Conector principal	12 pin
62	Connector to position sensor 1 / Conector del sensor de posición 1	2 pin
63	Connector to position sensor 2 / Conector del sensor de posición 2	2 pin
64	Connector to position sensor 3 / Conector del sensor de posición 3	2 pin
65	Connector to position sensor 4 / Conector del sensor de posición 4	2 pin
66	Hall sensor / Sensor hall	2 pin
67	Inductive sensor / Sensor inductivo	2 pin; 1240 Ω
68	Temperature sensor / Sensor de temperatura	2 pin; 6000 Ω @ 30°C

Connections between terminals / Conexiones entre terminales	
Main connector / Conector principal	Sensors and connectors / Sensores y conectores
61.1	-
61.2	64.1
61.3	62.1
61.4	65.1
61.5	63.1
61.6	68.1
61.7	-
61.8	66.2
61.9	67.1
61.10	-
61.11	-
61.12	64.2
61.13	62.2
61.14	65.2
61.15	63.2
61.16	68.2
61.17	-
61.18	66.1
61.19	67.2
61.20	-

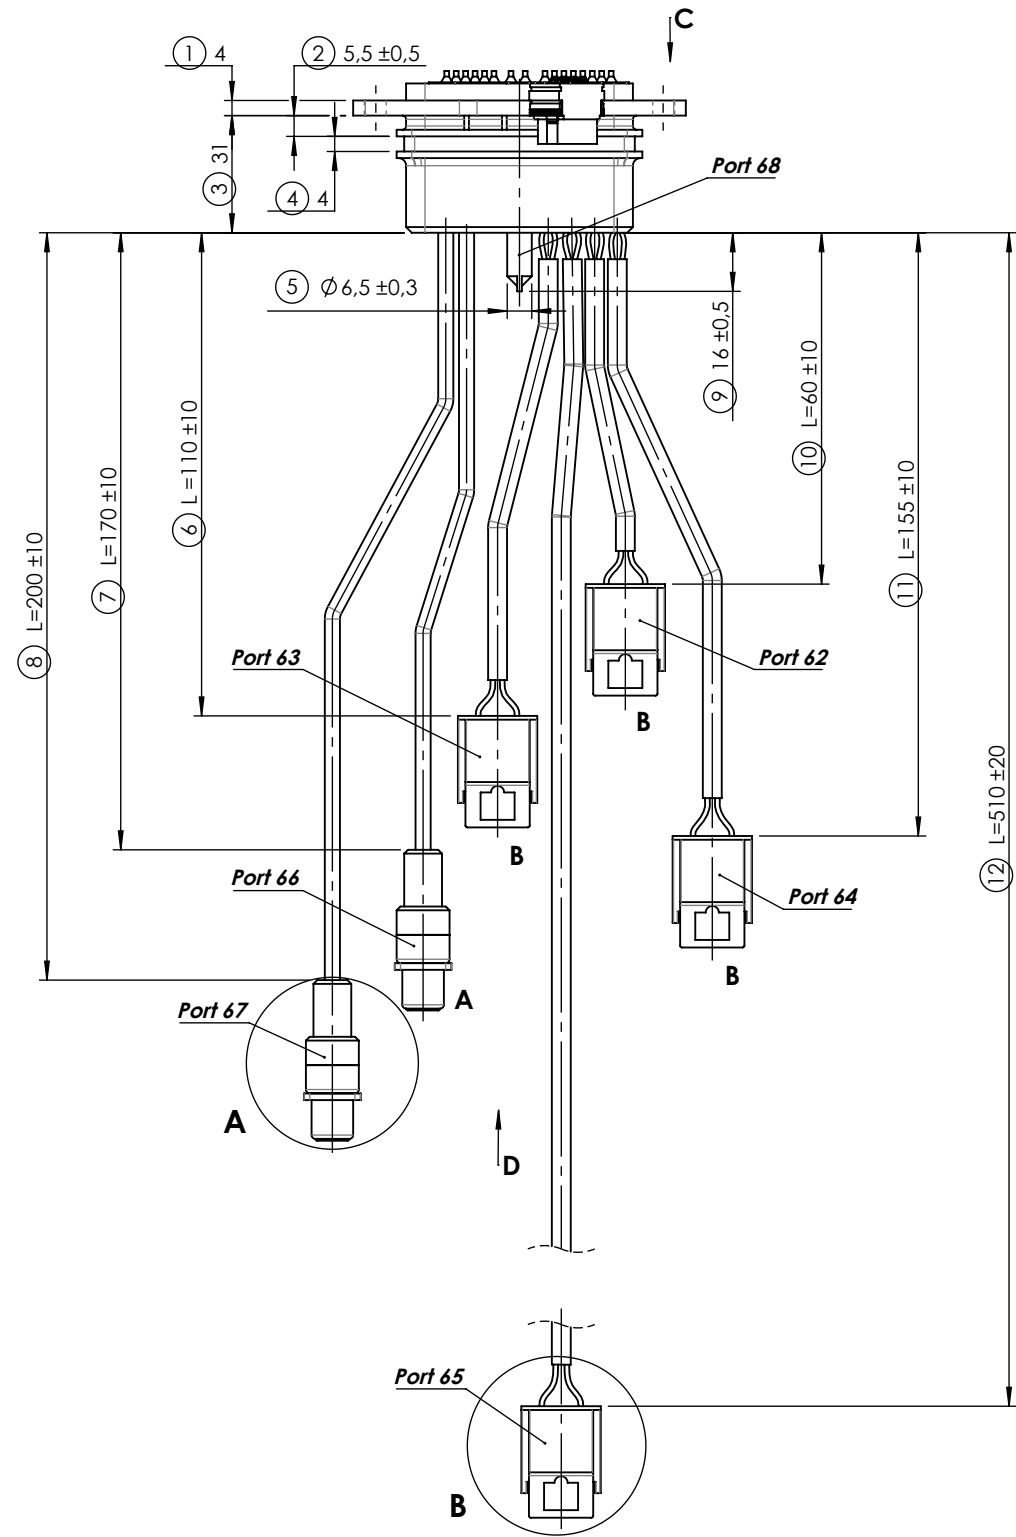


Scale / Escala 1 : 1
Hall sensor & inductive sensor /
Sensor hall & sensor inductivo

Scale / Escala 1 : 1
Position sensor connectors /
Conectores de los sensores de posición

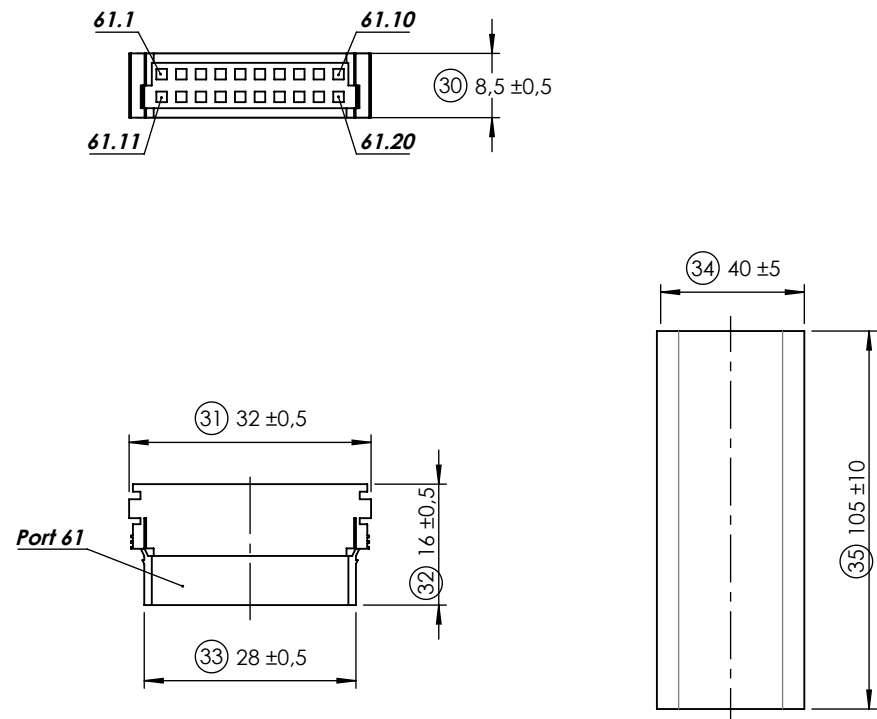


Scale / Escala 1 : 1
Protective tube included /
Tubo protector incluido

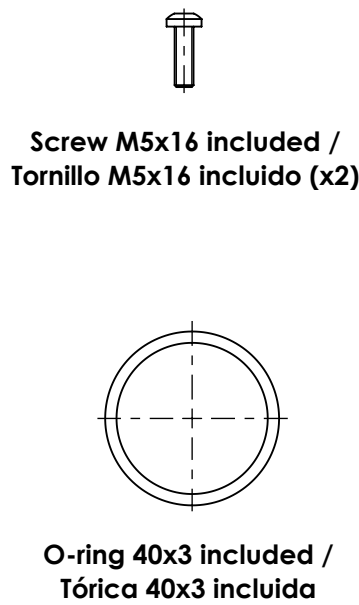

Screw M5x16 included /
Tornillo M5x16 incluido (x2)

O-ring 40x3 included /
Tórica 40x3 incluida

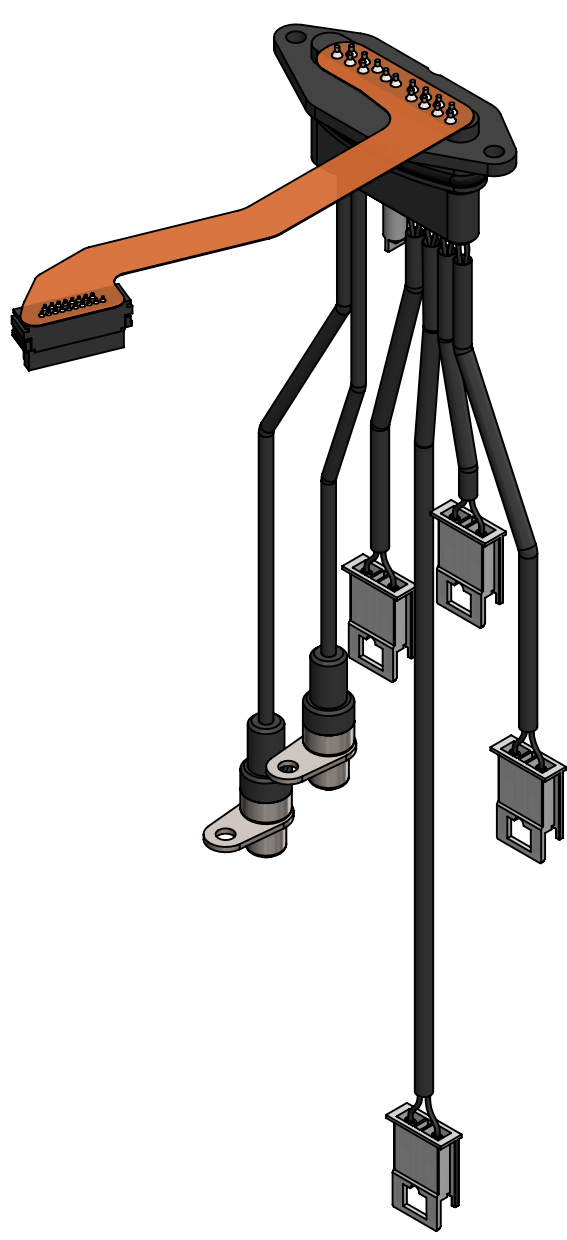

Modification	4				Drawn	cojali	
	3				05/12/25 S.S.		
	2				Checked	Gearbox repair kit	
	1				05/12/25 O.V.		
nº Modified		Date	Reason	General Tolerance	Assembly	Part name	
Comments				ISO 2768 c-K		ID. Reference	2261213
				Material		Scale: 1/2	
				-		Review: 0	